

SECTION 18

QUICK INDEX

	Page
ELECTRIC WIRE	1
WIRING DEVICES	7
SAFETY SWITCHES	20
FUSES	32
TAPE	35
ATTACHMENT PLUGS	64
EXTENSION CORDS	64
DOOR CHIMES	65



**SINCE
1870**



HOUSE FURNISHING GOODS DIVISION

SECTION 18

ELECTRIC WIRES, CABLES, CONDUITS, FITTINGS, ETC.
ELECTRIC FUSES, TAPES, ETC.
TELEPHONE EQUIPMENT
EXTENSION CORDS, BELLS, BUTTONS, ETC.



**SINCE
1870**

ELECTRIC WIRE—SECTION 18, PAGES 2 TO 6 INCLUSIVE

Whenever Necessary Use the 1000 feet Price on All Items of Electric Wire and Lamp Cords Shown on These Pages if the Quantity Ordered Calls for Less Than 1000 feet, but not Less Than Full Coils or Spools. This Arrangement Does not Apply to Cut Length Quantities Recently Added to Our Catalog.

ELECTRICAL CONSTRUCTION MATERIALS—SECTION 18, PAGES 7 TO 16 INCLUSIVE

Shown on These Pages are Such Items as Cable Connectors, Octagon and Switch Boxes, Conduit Connectors and Couplings and Other Items With Two Sets of Prices, Namely Case Lots and Less Than Case Lots, When Necessary Use the Quantity Prices on These Items Regardless of Amount Ordered.

CIRCUIT BREAKERS AND SAFETY SWITCHES— SECTION 18, PAGES 18 TO 30 INCLUSIVE

Whenever Necessary Use Quantity Discount on Federal-Pacific and Square D Equipment Regardless of Quantity Ordered.

FUSE PLUGS AND CARTRIDGE FUSES—SECTION 18, PAGES 32, 33 AND 34

Whenever Necessary Use Quantity Prices on These Items Regardless of Quantity Ordered.

FRICTION TAPE AND SLICING COMPOUND (EXCEPT SCOTCH ELECTRICAL TAPE)— SECTION 18, PAGES 34A, 35 AND 36

Whenever Necessary Use Quantity Prices on These Items Regardless of Quantity Ordered.

WIRE HOLDERS—SECTION 18, PAGE 37

Whenever Necessary Use Quantity Prices on These Items Regardless of Quantity Ordered.

ELECTRICAL WIRING DEVICES—SECTION 18, PAGES 40 TO 64J INCLUSIVE

Toggle Switches, Electric Sockets, Wall Plates, Duplex Receptacles, Box Covers, Plug Caps, Extension and Appliance Cord Sets, etc. Whenever Necessary Use Quantity Prices Regardless of Quantity Ordered, However, We ask That Less Than Shelf Package Lots of any of These Items are Not Sold.

NON-METALLIC SHEATHED CABLE

Commonly called "Romex" cable.



Listed by Underwriters' Laboratories, Inc.

With Type TW Thermo Plastic Conductors, 600 Volts

Has glass yarn cover that can't burn and is resistant to moisture, aging, oil, grease, chemicals, impact and abrasion. Cover is also smooth and flexible.

Two Conductor

Per Coil	Less Than 1000 ft.	Lots of 1000 feet	No. of Ga.	Wires	Feet in Coil	Wt. per Coil lbs.	Per Ft.
4-12SC2-M	X9D95★	X9D35★	12	2	250	19	\$0.05½
4-14SC2-M	X7D85★	X7D35★	14	2	250	15	.04½
4-10SC2-M	X17D50★	X16D40★	10	2	250	29	.11

Three Conductor

4-12SC3-M	X17D70★	X16D60★	12	3	250	31	.10
4-14SC3-M	X15D20	X14D07	14	3	250	26	.08½
4-10SC3-M	X26D30★	X24D50★	10	3	250	44	.16½
4-8SC3-M	X23D90	X22D40	8	3	125	44	.28

With Ground Wire—Two Conductor

4-G12SC2-M	X11D50	X10D70	12	2	250	23	.07
------------	--------	--------	----	---	-----	----	-----

WE DO NOT CUT COILS

ARMORED BUSHED CABLE

Listed by Underwriters' Laboratories, Inc.



BX flexible, flame-retardant, moisture-resistant armored cable. Each coil complete with bag of anti-short bushings.

Solid Copper Wires

Two Conductors

Per Coil	Less than 1000 ft.	Lots of 1000 feet	No. of Wires	Ga.	Feet in Coil	Wt. per Coil lbs.	Per Ft.
4-12BX2-M	X22D00	X20D50	2	12	250	60	\$0.13
4-14BX2-M	X16D00	X15D00	2	14	250	52	.09

WE DO NOT CUT COILS

UNDERGROUND TYPE UF CABLE

Listed by Underwriters' Laboratories, Inc.

Type UF Multiple Conductor Cable is recognized as both Type AZ Underground Feeder Cable and as Type NMC Non-Metallic Sheathed Corrosion and Moisture Resistant Cable.



Particularly suitable for use on farms and in rural areas and is the most economical cable for direct burial underground. Its lower cost and its dependability in damp or corrosive locations make it ideal for electrical distribution, from load center to outlying farm buildings and residences. By using this cable, overhead wiring hazards are eliminated.

The insulation for the conductors and the jacket is a tough thermoplastic which gives type UF cable its damage-resistant characteristics. 600 Volts.

Two Conductor—Solid

Per Coil	Less Than 1000 ft.	Lots of 1000 ft.	No. of Ga.	Wires	Feet in Coil	Wt. per Coil lbs.	Per Ft.
4-UF14/2-M	X13D00	X12D20	14	2	250	18	\$0.09
4-UF12/2-M	X17D50★	X16D50★	12	2	250	23	.11
4-UF10/2-M	X25D60	X24D00	10	2	250	30	.16½

WE DO NOT CUT COILS

Note—Can assort all type wires and cords to obtain quantity prices. Freight up to X1D30 Cwt. on all items of Electric Wire Listed on Page.

STAR ★ DENOTES BEST SELLER

WEATHERPROOF ELECTRIC WIRE

Listed by Underwriters' Laboratories, Inc.



Medium Hard Drawn—Weatherproof—Triple Braid
For outside use, triple cotton braid, single solid copper wire.

Per Coil	Less Than 1000 feet		Lots of 1000 feet	Gauge	Feet in a Coil	Appr. Wt.	
						lbs.	Per Foot
4-12WP-M	X12D40★	X11D65★	12		500	18 \$0.04 1/4	
4-14WP-M	X10D00	X9D35	14		500	13 .03 1/2	
4-10WP-M	X16D50★	X15D50★	10		500	27 .07	
4-8WP-M	X21D70★	X20D40★	8		500	38 .09	
4-6WP-M	X32D60★	X30D60★	6		500	56 .12 1/4	

We Do Not Cut Coils

ELECTRIC GROUND WIRE


Soft Drawn; Bare Copper; Solid Wire
Used for grounding electric circuits

Per Coil	Less Than 1000 feet		Lots of 1000 feet	Gauge	Feet in a Coil	Wt. per Coil, lbs. Per Foot	
4-4BW-M	X7D05	X6D60	4		100	13	\$0.15
4-6BW-M	X4D40	X4D10	6		100	8	.09

We Do Not Cut Coils

THERMO PLASTIC BUILDING WIRE

Listed by Underwriters' Laboratories, Inc.



Type TW, Thermo Plastic Moisture Resisting,
Solid Copper Wire—800 Volt

Small diameter thermoplastic-insulated building wires can be used to advantages for new wiring or for rewiring in industrial, commercial, and public buildings, theatres, hospitals, apartments, etc. For general-purpose wiring, and for wiring in wet locations. Approved by Underwriters' Laboratories, Inc. The 1947 National Electrical Code permits this type to be used for the conduit wiring in sizes No. 14 to 0000, and for open wiring in sizes No. 14 to 2,000 MCM.

The thermoplastic insulation of this wire has long life and high dielectric and mechanical strength. It is resistant to flame, oils, acids and alkalis. In addition, type TW also has a low moisture-absorption rate, and is approved for use in lieu of leaded cable in raceways in wet locations. The unusual characteristics of this insulation make possible the reduction of its wall thickness and the omission of an over-all braid. Brilliant colors, smooth, glossy finish.

Per Coil	Less than 1000 feet		Lots of 1000 feet	Ga.	Color	Feet in Coil	Wt. in Coil, lbs. Per Foot	
4-12TW-M	X7D30★	X6D80★	12		Black	500	14 \$0.02	
4-12TWW-M	X7D30★	X6D80★	12		White	500	14 .02	
4-12TWR-M	X7D30	X6D80	12		Red	500	14 .02	
4-14TW-M	X5D10	X4D78	14		Black	500	10 .01 1/2	
4-14TWW-M	X5D10	X4D78	14		White	500	10 .01 1/2	
4-10TW-M	X11D00★	X10D30★	10		Black	500	21 .03 1/2	
4-10TWW-M	X11D00	X10D30	10		White	500	21 .03	
4-8TW-M	X17D50	X16D40	8		Black	500	35 .05	
4-8TWW-M	X17D50	X16D40	8		White	500	35 .05	

WE DO NOT CUT COILS

Type TW, Thermo Plastic Moisture Resisting.

Stranded Copper Wire—800 Volt

4-6TW-M	X37D00	X34D52	6	Black	500	60	.12
4-6TWW-M	X37D00	X34D52	6	White	500	60	.12

WE DO NOT CUT COILS

Type RH/RW For 100 Ampere Service

Stranded Copper Wire—600 Volt

4-3RH/RW-M	X68D50	X63D90	3	Black	500	120	.22
4-3RH/RWW-M	X68D50	X63D90	3	White	500	120	.22
4-3RH/RWR-M	X68D50	X63D90	3	Red	500	120	.22

WE DO NOT CUT COILS

Can Assort All Types of Wires and Cords to Obtain Quantity Prices. Freight up to X1D00 Cwt. on All Items Listed on Page.

STAR ★ DENOTES BEST SELLER

UNARMORED SERVICE ENTRANCE CABLE

Listed by Underwriters' Laboratories, Inc.

TYPE SE—STYLE U—WITHOUT STEEL ARMOR



This cable is recommended for use from the entrance cap to the meter equipment, and can be installed directly on the outside of the building without conduit protection.

Construction—Conductors consist of stranded tinned copper separately insulated with N. E. C. 30%-performance grade rubber to required insulation thickness. Each conductor is braided and weatherproofed with Polar identification. The bare neutral conductor consists of individual strands of tinned copper concentrically laid, over which is applied a double wrap of heavy rubber tape and finally a heavy weatherproof and flame-retarding over all braid.

Per Coil	Less Than 1000 Feet	Lots of 1000 Feet	Shape	Total Conductors	Insulated Conductors, Size	Bare Concentric Conductor, Size	Appr. O. D., inches	Coil Lgh., Feet	Wt. per Coil, lbs.	Uses Entrance Fitting No.	Uses Connector No.	Uses Strap No.	Per Foot
4-USE8/2-M	X35D50	X33D50	Round	2	1 No. 8 Gauge	1 No. 8 Gauge	.47	250	47	K82M	K130M	K206M	\$0.22
4-USE8/2/25-M	X3D85	X3D60	Round	2	1 No. 8 Gauge	1 No. 8 Gauge	.47	25	5	K82M	K130M	K206M	.22
4-USE8/3-M	X52D50	X49D30	Oval	3	2 No. 8 Gauge	1 No. 8 Gauge	.51x.74	250	86	K82M	K134M	K207M	.33
4-USE6/3-M	X42D00	X39D40	Oval	3	2 No. 6 Gauge	1 No. 6 Gauge	.56x.84	150	70	K81M	K134M	K207M	.50
4-USE4/3-M	X58D50	X55D00	Oval	3	2 No. 4 Gauge	1 No. 4 Gauge	.82x.94	150	100	K81M	K132M	K208M	.65
4-USE2/3-M	X57D90	X54D00	Oval	3	2 No. 2 Gauge	1 No. 2 Gauge	.70x1.0	100	92	K168M	K132M	K208M	.95

WE DO NOT CUT COILS

Can Assort All Types of Wires and Cords to Obtain Quantity Price. Freight up to X1D00 Cwt. on All Items Listed Above.

ELECTRIC WIRE DEAL ASSORTMENT

Listed by Underwriters' Laboratories, Inc.


A Complete Wire Department in Only 2 Feet of Counter Space

Width 17½ inches. Depth 17 inches. Height 30¼ inches.

12 inch ruler on display head of stand, makes quick measuring possible, without waste. Wire cutter mounted on side of rack for convenience in cutting wire quickly and cleanly.

We have selected only popular types of cords, each a fast seller, all having the U/L approval. All items are regular stock wire. Replacements can be ordered when spool is empty.

You Can Sell More Wire by Displaying this
SHAPLEIGH'S All-Steel Counter Rack

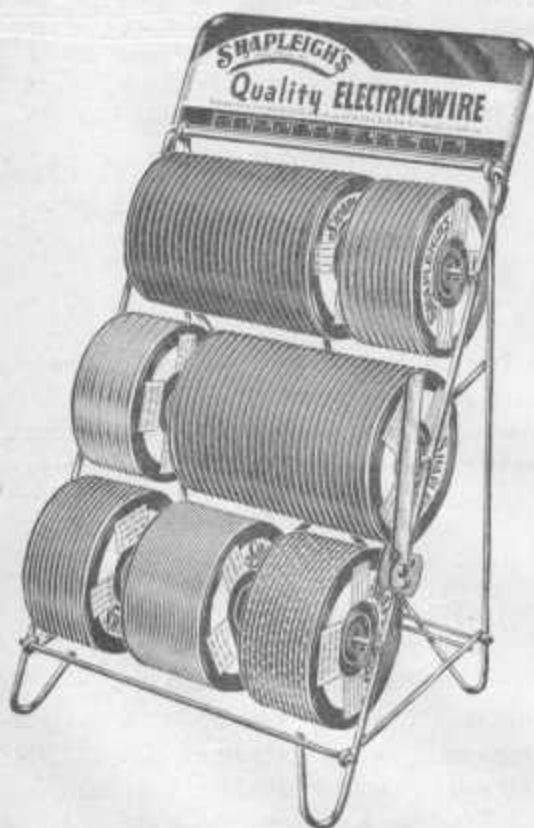

Assortment Consists of:

	Retail Per Foot	Total
250 feet K1150M-POT/B Lamp Cord	\$0.023½	\$6.25
250 feet K1150M-POT/W Lamp Cord	.02½	6.25
250 feet K1174M-18SJ/2½ Power and Extension Cord	.07	17.50
100 feet K1177M-18SV/S Vacuum Cleaner Cord	.07	7.00
250 feet K1150M-162BR Lamp Cord	.07	17.50
100 feet K1167M-183MR/S Heater Cord	.07	7.00
250 feet K1180M-16SJ/2½ Power and Extension Cord	.10	25.00
1 Only Display Stand		86.50
Grand Total		45.50
Dealers Cost		45.50
Dealers Profit (More than 47%)		41.00

1450 Feet of Seven Kinds of Popular Cords and Display Rack

Per Assortment

4-SWD3-M X45D50

Wt. asst. 65 lbs.

PARALLEL LAMP CORD



18 Gauge—Type SPT-1—300 Volt

Use on household fans, clocks, radios, lamps, small display signs and similar appliances not subject to hard usage.

Flexible stranded copper conductor, thermoplastic insulation, mid-rip for easy splitting and stripping. Insulation thickness $\frac{1}{4}$ -inch.

Nominal O. D. .127 x .215 inches.

Current carrying capacity 7 amperes.

(POT/B)

Per Spool		Color	Per Ft.
K1156M	X3D25★	Brown	\$0.02 $\frac{1}{2}$
Lots 1000 ft. X3D00★			
KX1156M	X3D00★	(Case lots 2000 ft.)	

(POT/I)

K1158M	X3D25	Ivory	.02 $\frac{1}{2}$
Lots 1000 ft. X3D00			
KX1158M	X3D00	(Case lots 2000 ft.)	

(POT/W)

K1159M	X3D25★	White	.02 $\frac{1}{2}$
Lots 1000 ft. X3D00★			
KX1159M	X3D00★	(Case lots 2000 ft.)	

250 feet on spool

Shipping wt. spool 6 lbs.

We Do Not Cut Spools

PARALLEL LAMP CORD

 $\frac{1}{4}$ -inch—Type SP-1—300 Volt

Use on household fans, clocks, radios, lamps, small display signs and similar appliances not subject to hard usage.

Flexible stranded copper conductor, cotton separator, rubber insulation. Mid-rip for easy splitting and stripping.

(182BR)

Nominal O. D. .127 x .215 inches

Per Spool		Color	Per Ft.
K1155M	X4D60★	Brown	\$0.03
Lots 1000 ft. X4D25★			
KX1155M	X4D25★	(Case lots 2000 ft.)	

(182-1)

K1152M	X4D60	Ivory	.03
Lots 1000 ft. X4D25			
KX1152M	X4D25	(Case lots 2000 ft.)	

(182BL)

K1153M	X4D60	Black	.03
Lots 1000 ft. X4D25			
KX1153M	X4D25	(Case lots 2000 ft.)	

250 feet on spool

Shipping wt. spool 7 lbs.

We Do Not Cut Spools

16 Gauge—Type SP-2—300 Volt

$\frac{1}{4}$ -inch insulation. Nominal O. D. .160 x .315.

(162BR)

Per Spool		Color	Per Ft.
K1150M	X9D75★	Brown	\$0.07
KX1150M	X9D25★	(Case lots 1000 ft.)	

(162BL)

K1149M	X9D75	Black	.07
KX1149M	X9D25	(Case lots 1000 ft.)	
250 feet on spool. Wt. spool 10 lbs.			

We Do Not Cut Spools

TWISTED LAMP CORD



Type C—300 Volt

Stranded copper conductor, separator, rubber insulation, cotton braid, twisted pair, green and yellow colors.

(G18LC)

18 gauge, $\frac{1}{8}$ -inch insulation
Nominal O. D. .300 inch

Per Spool		Per Ft.
K1147M	X8D00★	.06
KX1147M	X7D50★	(Case lots 1000 ft.)
250 feet on a Spool		
Shipping weight per spool 7 lbs.		
We Do Not Cut Spools		

ELECTRIC IRON AND HEATER CORD



Type HPD—300 Volts

For indoor use on appliances such as irons, percolators, toasters, heaters, soldering irons, etc. Flexible standard copper conductor, cotton wrapped, rubber insulation, asbestos roving. Conductor twisted, braided overall. Made in various colors and tracers.

Insulated thickness $\frac{1}{4}$ -inch

(183MR/S)

18 gauge

Per Spool		Per Ft.
K1167M	X4D00	.07
KX1167M	X3D75	(Case lots 800 ft.)
Lots 1000 ft. X3D75		
100 feet on spool. Weight spool 3 $\frac{1}{2}$ lbs.		

(163MR/S)

16 gauge

K1165M	X4D85	.10
KX1165M	X4D50	(Case lots 800 ft.)
Lots 1000 ft. X4D50		
100 feet on spool. Weight spool 4 lbs.		
We Do Not Cut Spools		

Can Assort All Types of Wires and Cords to Obtain Quantity Price.

Note



This Symbol Indicates that these Items are Listed by Underwriters' Laboratories, Inc.

STAR ★ DENOTES BEST SELLER

POWER AND EXTENSION CORD



Large Size, Type S

Per Coil		Diameter, inches	Gauge	No. of Wires	Feet in Coil	Wt. Coil, lbs.	Per Foot
4-14R2-M	X28D75	.540	14	2	250	37	\$0.25
Lots of 1000 feet	X26D75						
4-12R2-M	X41D50	.580	12	2	250	43	.30
Lots of 1000 feet	X38D50						



Small Size, Type SJ

For washing machines, refrigerators, sound equipment, small motors, tools and appliances.
Stranded copper conductor, separator, color-coded rubber insulation, cabled with filler, separator and rubber jacket over-all.

Per Spool		Diameter, inches	Gauge	No. of Wires	Feet on Spool	Wt. Spool, lbs.	Per Foot
*61-4624/13-M	X24D50	.410	14	2	250	26	\$0.20
Lots of 1000 feet	X22D50						
K1180M	X11D75★	.325	16	2	250	17	.10
6-K1180M	X11D00★	(Case lots 1000 feet)					
K1174M	X8D75★	.295	18	2	250	14	.07
KX1174M	X8D15★	(Case lots 1000 feet)					
K1197M	X13D00	.295	18	3	250	17	.10
KX1197M	X12D00	(Case lots 1000 feet)					



Small Size, Vacuum Cleaner Cord, Type SV

For vacuum cleaners, domestic food mixers, office equipment and other light duty requirements.
Extra flexible stranded copper conductor, separator, color-coded rubber insulation, cabled with filler, separator and rubber jacket over-all.

Black Color

(18SV/2 1/2)

Per Spool		Diameter, inches	Gauge	No. of Wires	Feet on Spool	Wt. Spool, lbs.	Per Foot
K1178M	X9D00	.250	18	2	250	10	\$0.06
KX1178M	X8D25	(Case lots 1000 feet)					

We Do Not Cut Spools or Coils

Can Assort All Types of Wires and Cords to Obtain Quantity Prices.



This Symbol Indicates that these Items are Listed by Underwriters' Laboratories, Inc.

Note—Items Marked * are not Approved by Underwriters Laboratories, Inc.

STAR ★ DENOTES BEST SELLER

ANNUNCIATOR BELL WIRE



Assorted Colors

Red, Blue, Green, White, Brown, Black

For bells, radios, chimes, communication systems and toy electric trains. Low voltage.

Solid copper conductor, thermo-plastic insulation.

Per Coil		Feet in Coil	Coils in Ctn.	Wt. lbs.	Per Coil
K1187M	D1C5★	25	100	12	\$0.25

Per Case

KK1187M X14D00★—(Case lots 100 coils)

Per Coil		Feet in Coil	Coils in Ctn.	Wt. lbs.	Per Coil
K1189M	D3C7★	65	100	30	.70

Per Case

KK1189M X34D00★—(Case lots 100 coils)

BELL WIRE



Assorted Colors

18 gauge twisted thermo plastic insulated copper runs about 135 feet per pound. Color coded conductors.

Seven Pound Spools

(BW18)

Per Spool		Per Foot
K1204M	X7D00	\$0.02
Per Case		
KK1204M	X52D00	(Case lots 8 spools)

We Do Not Cut Spools

THERMOSTAT WIRE



**BRAIDED
WAXED THERMO**

For thermostat controls in connection with heating and air conditioning installations. Low voltage.

Thermoplastic insulation, color-coded. Conductor twisted, overall cotton braid, waxed.

(WT18)

Per Spool		No. of Wires	Feet on a Spool	Weight per Spool lb., fl. oz.	Per Foot
K1184M	X6D75	2	500	8	\$0.02½
Lots of 1000 ft.	X6D25				
KX1184M	X6D25 —(Case lots 2000 ft.)				
K1186M	X9D50	3	500	11	.03½
Lots of 1000 ft.	X8D85				
KX1186M	X8D85 —(Case lots 2000 ft.)				
	We Do Not Cut Spools				

**NO BRAID
THERMO**

For thermostat controls in connection with heating and air conditioning installations. Low voltage.

18 gauge solid copper conductor, thermoplastic insulation, color-coded, conductors twisted.

(PT18)

Per Spool		No. of Wires	Feet on a Spool	Weight per Spool lb., fl. oz.	Per Foot
K1181M	X5D35★	2	500	6	\$0.02
Lots of 1000 ft.	X5D00★				
KX1181M	X5D00 —(Case lots 2000 ft.)				
K1183M	X7D75	3	500	9	.03
Lots of 1000 ft.	X7D15				
KX1183M	X7D15 —(Case lots 2000 ft.)				
	We Do Not Cut Spools				

Note



Can Assort All Types of Wires and Cords to Obtain Quantity Prices.

This Symbol Indicates that these Items are Listed by Underwriters' Laboratories, Inc.


STAR ★ DENOTES BEST SELLER

WIRE MEASURING SET

OLYMPIC

Heavy Gauge Equipment

Built for efficient and rugged service. Handles large materials including building wire, multi-conductor cables and corlage to the maximum meter capacity of one inch diameter.

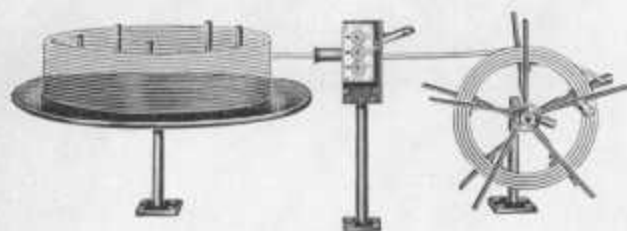

FOR MOUNTING ON COUNTER OR WORK BENCH

Meter—Assures accurate and efficient measurement. All gears and moving parts enclosed. Metering wheel is machined steel. Dials quickly reset to zero. Convenient release handle permits quick insertion of material. Oilite bronze bearings. Wrinkle gray enamel finish.

Meter Stand—Light in weight but sturdy, of welded steel construction with wrinkle gray finish. 14 inches high.

Reel and Counter Stand—Collapsible reel will hold 500 feet of No. 14 insulated wire, $\frac{3}{16}$ inch manila rope or equivalent. Open construction permits tying of coils before removing of reel. Does not bend wire sharply. Steel construction throughout. Reel 12 inch diameter. Stand 12 inches high.


Rotary Table and Wind-off Reel—Will stand strain of large capacities of heavier materials. Welded steel construction. Integral brake prevents free wheeling and tangling of wire.

Rotary Table has four vertical spacers that are adjustable to 5 positions for various coil diameters. Vertical center post will accommodate spools of wire. Wind off Reel 22 inches diameter, 8 inches high, vertical center post 12 $\frac{1}{2}$ inches high. Height of stand 12 $\frac{1}{2}$ inches. Height over all 25 inches.

Per Set

+1-M X79D00

One in pkg. Wt. pkg. 32 lbs.

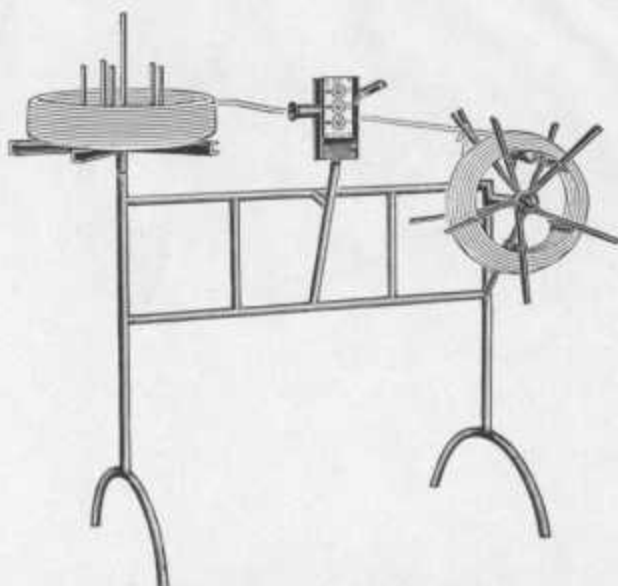

FOR MOUNTING ON FLOOR

Meter—Assures accurate and efficient measurement. All gears and moving parts enclosed. Metering wheel is machined steel. Dials quickly reset to zero. Convenient release handle permits quick insertion of material. Oilite bronze bearings. Wrinkle gray enamel finish.

Heavy Duty Floor Stand—Light in weight but sturdy, of welded steel tubing with wrinkle gray finish. 37 inches high. 42 $\frac{1}{2}$ inches long. Requires 2x5 feet of floor space.

Reel—Collapsible reel will hold 500 feet of No. 14 insulated wire, $\frac{3}{16}$ inch manila rope or equivalent. Open construction permits tying of coils before removing of reel. Does not bend wire sharply. Steel construction throughout. Reel 12 inches diameter.

Rotary Table—Will stand strain of large capacities of heavier materials. Welded steel construction. Integral brake prevents free wheeling and tangling of wire.

Has four vertical spacers that are adjustable to 5 positions for various coil diameters. Vertical center post will accommodate spools of wire. Wind off reel 22 inches diameter, 8 inches high, vertical center post 12 $\frac{1}{2}$ inches high.

Per Set


+2-M X122D00

Packed in two pkgs. Wt. 46 lbs.

Small Gauge Equipment

For merchandising extension cord, radio and TV ribbon and smaller gauges of flexible materials.

FOR MOUNTING ON COUNTER OR WORK BENCH

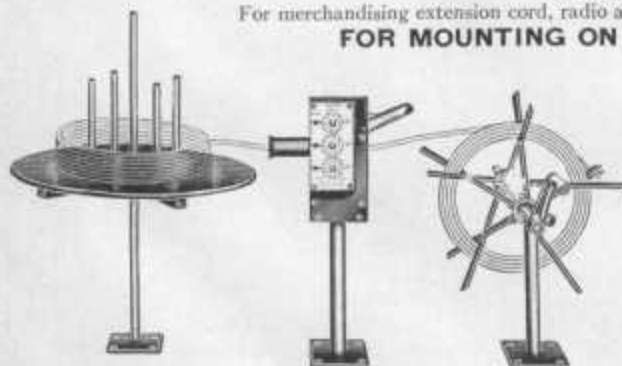

Per Set

+3-M X61D50

One in pkg. Wt. pkg. 18 lbs.

Meter—Assures accurate and efficient measurement. All gears and moving parts enclosed. Metering wheel is machined steel. Dials quickly reset to zero. Convenient release handle permits quick insertion of material. Oilite bronze bearings. Wrinkle gray enamel finish.

Meter Stand—Light in weight but sturdy, of welded steel construction with wrinkle gray finish. 10 inches high.

Reel—Light duty collapsible reel and spool winder. Sturdy steel construction with oilite bearings. Wrinkle gray finish. Forms a coil 8 inches in diameter. Will accommodate spools up to 10x10 inches. Quick acting locking cone. Adjusts to any spool hub. Height 9 inches. Length over all 19 $\frac{1}{2}$ inches.

Rotary Table and Wind-off Reel—Capacity 500 feet of No. 14 R. C. or equal. Four adjustable posts for two different coil diameters. Complete with 15 inch plywood top and stand. Sturdy welded steel construction. Wrinkle gray finish.

Items marked + not carried in stock. Can only be furnished by shipping direct from factory, F. O. B., Chicago, Illinois.

SERVICE ENTRANCE CABLE FITTINGS

Listed by Underwriters' Laboratories, Inc.

WATERTIGHT
CONNECTORS
COMPRESSION TYPE

For use when the cable runs directly into the top of an outside meter box. When the nut is screwed down, the rubber bushing provides a firm grip around the cable, preventing water from seeping into box.

For Round Cable



SEA 1/1-No. 10 1-No. 10
SEU or SD 1-No. 8 1-No. 8

1 inch Thread Size

Each Each
K130M (RL28) D4C8..... \$0.70
KK130M (RL28) D4C4—(Case lots 100)

Twenty in box, 100 in ctn. Wt. ctn 23 lbs.



For Oval Cable

SEA { 2-No. 6 1-No. 8
SEU or SD { 2-No. 6 1-No. 8
SEU or SD { 2-No. 6 1-No. 8

1 inch Thread Size

Each Each
K134M (OL38) D4C8★..... \$0.70
KK134M (OL38) D4C4★—(Case lots 100)

Twenty in box, 100 in ctn. Wt. ctn. 23 lbs.

For Oval Cable

SEU or SEA { 2-No. 2 1-No. 2

1 1/4 inch Thread Size

Each Each
K132M (SEO-10125) X1D00..... \$1.40
KK132M (SEO-10125) D9C0—(Case lots 50)

Five in box, 50 in ctn. Wt. ctn. 23 lbs.

WATERTIGHT
CONNECTORS

Two Screws

Easily and quickly installed by tightening screws, which compresses the rubber bushing around the cable for a positive water-tight joint.

For Oval Cable



SE-Style A { 2-No. 8 1-No. 10
2-No. 8 1-No. 8
SE-Style U { 2-No. 8 1-No. 10
& SD { 2-No. 8 1-No. 8

3/4 inch Thread Size

Each Each
K135M (SO38) D3C8..... \$0.55
KK135M (SO38) D3C4—(Case lots 100)

Wt. ctn. 20 lbs.

For Oval Cable



SE-Style U { 2-No. 6 1-No. 8
2-No. 6 1-No. 6
& SD { 2-No. 6 1-No. 8
2-No. 6 1-No. 6

1 inch Thread Size

Each Each
K136M (SOL38) D4C8..... \$0.70
KK136M (SOL38) D4C4—(Case lots 100)

Wt. ctn. 25 lbs.

NON WATERTIGHT
CONNECTORS

A very popular connector because of the wide range of cables to which it can be adapted. The clamps are so made that they fit either oval or round cables, and the two screws provide even pressure on the entire surface of the cable.



SE-Style A { 2-No. 12 1-No. 12
1-No. 10 1-No. 10
2-No. 10 1-No. 10
1-No. 8 1-No. 8
2-No. 8 1-No. 10
2-No. 8 1-No. 8
SE-Style U { 1-No. 6 1-No. 8
& SD { 2-No. 6 1-No. 6
2-No. 6 1-No. 6
1-No. 4 1-No. 4
2-No. 4 1-No. 6
2-No. 4 1-No. 4
1-No. 2 1-No. 2

For 3/4 inch K. O.

Each Each
K142M (6078) D2C2★..... \$0.33
KK142M (6008) D1C9 1/2★—(Case lots 100)

Ten in box, 200 in ctn. Wt. ctn. 64 lbs.

SE-Style A { 2-No. 10 1-No. 10
1-No. 8 1-No. 8
2-No. 8 1-No. 10
2-No. 8 1-No. 8
1-No. 6 1-No. 6
SE-Style U { 2-No. 6 1-No. 8
& SD { 2-No. 6 1-No. 6
1-No. 4 1-No. 4
2-No. 4 1-No. 6
2-No. 4 1-No. 4
1-No. 2 1-No. 2
2-No. 2 1-No. 4
2-No. 2 1-No. 2

For 1 inch K. O.

Each Each
K143M (6009) D3C0..... \$0.45
KK143M (6009) D2C7—(Case lots 100)

Ten in box, 100 in ctn. Wt. ctn. 50 lbs.

SE-Style A { 2-No. 2 1-No. 2
SE-Style U { 2-No. 2 1-No. 2

For 1 1/4 inch K. O.

Each Each
K133M (15235) D5C5..... \$0.80
KK133M (15235) D4C9—(Case lots 20)

Five in box, 20 in ctn. Wt. ctn. 6 lbs.

STAR ★ DENOTES BEST SELLER

ENTRANCE HEADS

Listed by Underwriters' Laboratories, Inc.

Service Heads



Furnished with a one hole mounting bracket for quick and easy attachment to building. The cable is held into the head by an internal clamp, made of heavy aluminum. Thorium plated to resist corrosion.

For Service Entrance Cables

1-12 Insulated	1-12 Bare
2-12 Insulated	1-12 Bare
1-10 Insulated	1-10 Bare
2-10 Insulated	1-12 Bare
2-10 Insulated	1-10 Bare
1-8 Insulated	1-8 Bare
2-8 Insulated	1-10 Bare
2-8 Insulated	1-8 Bare
1-6 Insulated	1-6 Bare
2-6 Insulated	1-8 Bare
2-6 Insulated	1-6 Bare
1-4 Insulated	1-4 Bare

Each	Each
K82M (1573A) D6C3★	\$0.90
KK82M (1573A) D5C7★	(Case lots 100)

Five in ctn. 100 in case. Wt. case 40 lbs.



Made of heavy aluminum. New "Swing Top" S. E. C. cap. Two screw clamp.

For Service Entrance Cables

1-8 Insulated	1-8 Bare
1-6 Insulated	1-8 Bare
1-6 Insulated	1-6 Bare
1-4 Insulated	1-6 Bare
1-4 Insulated	1-4 Bare
1-2 Insulated	1-4 Bare
1-2 Insulated	1-2 Bare
2-12 Insulated	1-12 Bare
2-10 Insulated	1-10 Bare
2-8 Insulated	1-8 Bare
2-6 Insulated	1-8 Bare
2-6 Insulated	1-6 Bare
2-4 Insulated	1-6 Bare
2-4 Insulated	1-4 Bare
2-3 Insulated	1-5 Bare
2-3 Insulated	1-3 Bare

Each	Each
K81M (1572A) D6C8	\$1.00
KK81M (1572A) D6C2	(Case lots 100)

Ten in ctn. 100 in case. Wt. case 35 lbs.

ENTRANCE HEADS

Listed by Underwriters' Laboratories, Inc.



Made of Heavy Aluminum, Rust Proof

For use with oval and round bare neutral concentric service entrance cable and also round armored service entrance cable.

2-6 Insulated	1-8 Bare
2-6 Insulated	1-6 Bare
2-4 Insulated	1-6 Bare
2-4 Insulated	1-4 Bare
2-2 Insulated	1-2 Bare

Diameter of opening for cable minimum $1\frac{1}{8}$ in.
Maximum $1\frac{3}{8}$ in.

Each	Each
K168M (15206) X1D40	\$2.00
KK168M (15206) X1D25	(Case lots 25)

25 in ctn. Wt. ctn. 30 lbs.

FLANGED TYPE
ENTRANCE HEAD

Made of Rustless Aluminum

Designed to Meet REA Specification

Simple to install. Drill a hole in the building and insert the threaded hub. Supplied with screws. The outside diameter of the flange is $3\frac{1}{4}$ inches and the outside diameter of the hub is 1 inch. Use a $1\frac{1}{8}$ inch bit to bore correct size hole.

With Compound

Each	Each
K83M (1580) D7C6	\$1.15
KK83M (1580) D6C9	(Case lots 100)

100 in standard pkg. Wt. pkg. 36 lbs.

SILL PLATES

Listed by Underwriters' Laboratories, Inc.



For Service Entrance Cable

Provides protection to the service cable where it enters the building. Each plate is supplied with two wood screws with compound for weatherproofing as desired.

For sizes to 3 conductor No. 4.

With Compound

Each	Each
K186M (L63/C) D3C0	\$0.40
KK186M (L63/C) D2C7	(Case lots 100)
Ten in box. 100 in ctn. Wt. ctn. 13 lbs.	

Made of Cast Aluminum

Complete with hot dipped galvanized wood screws. For all sizes of service entrance cable to 3 conductor No. 2.

With Compound

Each	Each
K179M (25236) D4C4	\$0.60
KK179M (25236) D4C1	(Case lots 100)
Ten in box. 100 in ctn. Wt. ctn. 15 lbs.	

ENTRANCE CABLE STRAPS



One Hole Malleable Iron

FOR TYPE SEU AND SEA
SERVICE ENTRANCE CABLE

1-No. 10	1-No. 10
1-No. 8	1-No. 8
1-No. 6	1-No. 6

Each	Each
K206M (280) D0C4	\$0.06
KK206M (280) D0C3½	(Case lots 1000)
100 in ctn. Wt. ctn. 2 lbs.	

2-No. 8	1-No. 8	2-No. 4	1-No. 6
2-No. 8	1-No. 10	2-No. 4	1-No. 4
2-No. 6	1-No. 6	2-No. 6 Non-Metallic	
2-No. 6	1-No. 8		

Each	Each
K207M (281) D0C4½★	\$0.07
KK207M (281) D0C4★	(Case lots 1000)
100 in ctn. Wt. ctn. 3 lbs.	

2-No. 2	
1-No. 2	1-No. 4
3-No. 4	
2-No. 4	1-No. 6
3-No. 2	
2-No. 2	1-No. 4

Each	Each
K208M (15277) D0C5	\$0.08
KK208M (15277) D0C4½	(Case lots 100)
100 in ctn. Wt. ctn. 6 lbs.	

CABLE CONNECTORS

Listed by Underwriters' Laboratories, Inc.



For Non-Metallic and Service Entrance Cables

Two screw type clamp connector made of malleable iron. For 14/2, 14/3, 12/2, 12/3, 10/2, 10/3 Non-Metallic and service entrance cables and for, 8/1 and 6/1 service entrance cables.

Thread Size 3/8 inch

Per Ctn.	Each
K140M (651) X4D25	\$0.12
Per Case	
KK140M (651) X39D50—(Case lots 10 ctns.)	
Fifty in ctn. 500 in case. Wt. case 30 lbs.	

Sold Only in Full Cartons

REGAL

Listed by Underwriter's Laboratories, Inc.



Fits most popular sizes of non-metallic cable.

Made of zinc die cast alloy. Cable opening 3/8 inch for 3/8 inch K.O. Two screw squeeze type.

Each	Each
K93M (6623) D0C5★	\$0.07 1/2
KK93M (6623) D0C4 1/2★—(Case lots 100)	

100 in ctn. Wt. ctn. 5 1/2 lbs.



Armored Cable—8-2, 6-2, 8-3

Armored Lead Cable—8-2, 6-2

Flexible Steel Conduit—1/2 inch

Non-Metallic Sheathed Cable—6-2, 4-2 8-3, 6-3

1/2 inch Cable Opening for 3/4 inch K. O.

Each	Each
K137M (Y12B) D2C3	\$0.30
KK137M (Y12B) D2C1—(Case lots 100)	

Twenty in ctn. 100 in case. Wt. case 20 lbs.

THIN WALL CONDUIT

Listed by Underwriters' Laboratories, Inc.

CLAYTON MARK



Thin wall conduit tubing has all the characteristics of standard conduit but is used without threading and is much lighter. Electro galvanized acid and rustproof finish outside and a smooth enamel finish on the interior for easy drawing of wires.

Ten Feet in a Length

Per Length	Size in.	Wt. lbs.	Lgths. bdl. in.	Per Lgth.
0-1/2T-M N-D7C7★	1/2	30	10	\$1.20
Lots of 10 Lengths	N-D7C3★			
0-3/4T-M N-X1D10★	3/4	45	10	1.75
Lots of 10 Lengths	N-X1D04★			
0-1T-M N-X1D52	1	60	10	2.50
Lots of 10 Lengths	N-X1D44			
0-1 1/4T-M N-X2D12	1 1/4	52	5	3.25
Lots of 10 Lengths	N-X2D02			
0-1 1/2T-M N-X2D42	1 1/2	60	5	3.75
Lots of 10 Lengths	N-X2D29			
0-2T-M N-X3D13	2	43	3	4.75
Lots of 10 Lengths	N-X2D97			

Sold Only in Full Lengths

Can assort for Quantity Price

RIGID CONDUIT

Listed by Underwriters' Laboratories, Inc.

CLAYTON MARK



Hot Galvanized Finish

Smooth, lacquer-coated inside so that wire can be drawn through easily.

Threaded both ends—with coupling 'on' one end.

Ten Feet in a Length

		Wt. Lgths.			
Per Length		Size, in.	bdl. lbs.	in bdl.	Per Lgth.
0-½G-M	N-X1D88	½	70	10	\$3.25
0-¾G-M	N-X2D45	¾	53½	5	4.50
0-1G-M	N-X3D50	1	77	5	6.50
0-1¼G-M	N-X4D60	1¼	60	3	8.25
0-1½G-M	N-X5D45	1½	75	3	8.25
Per Length			Wt. per lgth.		Per Length
0-2G-M	NX7D30	2	33½		10.90

Loose

Sold Only in Full Lengths

STAR ★ DENOTES BEST SELLER

CONDUIT LOCK NUTS

Listed by Underwriters' Laboratories, Inc.



Made of steel, smoothly finished and perfectly threaded.

Each	Size, ins.	No. in ctn.	Wt. lbs.	Each
K180M D0C3 1/2	3/2	200	5	\$0.06
K181M D0C2 1/2★	1 1/2	100	1	.04
K182M D0C3 1/2★	3/4	100	2	.06
K183M D0C6★	1	50	2	.10
K184M D0C7 1/2	1 1/4	50	3	.12

THIN WALL CONDUIT BENDERS

Listed by Underwriters' Laboratories, Inc.



These Benders will make perfect 90 degree bends or offsets in exactly the right place with very little effort. The deep, close-fitting bending groove grips the conduit automatically and prevents kinking, flattening and slipping.

For bending thin wall conduit.

Each	Conduit Size, in.	Wt. ctn., lbs.	Each
K42M (TWB1) X3D15	1 1/2	2	\$5.00
K43M (TWB2) X5D35	3/4	4	8.35

One in ctn.

THIN WALL CONDUIT CONNECTORS

Listed by Underwriters' Laboratories, Inc.



Malleable iron, galvanized finish; this new fitting is universal in use in that the one fitting will make a watertight job that can be used in a non-watertight installation at no increase in price.

1/2 Inch

Each			Each
K89M	(CFC402)	D1C3 1/2 ★	\$0.19
KK89M	(CFC402)	D1C2 1/2 ★	(Case lots 200)

50 in a carton, 200 in a case
Weight case, 19 lbs.

3/4 Inch

K90M	(CFC403)	D1C8	.27
KK90M	(CFC403)	D1C6	(Case lots 100)

25 in a carton, 100 in a case
Weight case, 14 lbs.

1 Inch

K91M	(CFC404)	D3C0	.42
KK91M	(CFC404)	D2C7	(Case lots 100)

25 in a carton, 100 in a case
Weight case 23 lbs.

THIN WALL CONDUIT COUPLINGS

Listed by Underwriters' Laboratories, Inc.



Malleable iron, galvanized finish; this new fitting is universal in use in that the one fitting will make a watertight job that can be used in a non-watertight installation at no increase in price.

1/2 Inch

Each			Each
K102M	(CFC302)	D1C5 1/2	\$0.25
KK102M	(CFC302)	D1C4	(Case lots 200)

50 in a carton, 200 in a case
Weight case, 20 lbs.

3/4 Inch

K103M	(CFC303)	D2C2	.35
KK103M	(CFC303)	D2C0	(Case lots 100)

25 in a carton, 100 in a case
Weight case, 20 lbs.

ENTRANCE ELLS

Listed by Underwriters' Laboratories, Inc.



Made of rust resistant aluminum. Type SLB with grounding hub for 1/2 inch rigid conduit.

For Use with Rigid Conduit

Each			Size	No.	Wt.	
			Conduit, in.	in case,	ins. Ctn.	Each
K155M	(GSLB3)	X1D60	1	5	15	\$2.35
KK155M	(GSLB3)	X1D45			(Case lots 25 only)	
K154M	(11793)	X2D15	1 1/4	5	21	3.10
KK154M	(11793)	X2D00			(Case lots 10 only)	

ENTRANCE HEADS

Listed by Underwriters' Laboratories, Inc.



For Use with Rigid Conduit

These entrance caps can be used in both vertical or horizontal positions, the entrance holes (2 open and 2 closed) being at an angle of 45 degrees in either position; made of malleable iron; galvanized finish; hood is secured by 2 screws and cannot fall off; heavy composition insulator.

Each			Holes	Size	in	No.	Wt.	
			Cond.	Insu-	in case,	ins. lator	case lbs.	Each
			(2222)					
K163M	D4C2	1/2	4	50	35	\$0.55		
KK163M	D3C8			(Case Lots, 80 Only)				
			(2223)					
K164M	D5C5	3/4	5	50	44	.75		
KK164M	D5C0			(Case Lots, 80 Only)				
			(2224)					
K166M	D8C1	1	5	20	25	1.15		
KK166M	D7C4			(Case Lots, 20 Only)				
			(2225)					
K167M	X1D07	1 1/4	5	10	15	1.50		
KK167M	D9C7			(Case Lots, 10 Only)				
			(374)					
K138M	X1D85	1 1/2	6	5	12	2.65		
KK138M	X1D70			(Case lots 5 only)				
			(375)					
K148M	X3D70	2	6	5	24	5.20		
KK148M	X3D40			(Case lots 5 only)				

NON-METALLIC CABLE STRAPS



Two-Hole

Made of rust-resisting steel. With raised center rib for increased strength.

Will fit sizes, 14W2, 12W2 and 10W2.

For Non-Metallic Sheathed Cable

22 Gauge

Approximately 100 straps to the pound.

Per Ctn. Per Ctn.

K217M (NMS) X1D30.....\$1.95

Per Case
KK271M (NMS) X12D00—(Case lots 10 ctns.)

5 lbs. in ctn. Ten ctns. in case.

Sold Only In Full Cartons

PIPE AND BX STRAPS



Two-Hole

Made of rust-resisting steel, arc of uniform gauge thickness. Snug fitting, with rounded edges. Prominently

raised center rib gives added strength far beyond ordinary pipe straps.

Per Ctn. Size, No. to Per
in. Gauge lb. Ctn.

K219M (PS) X1D30 1/4 22 41 \$1.95

Per Case
KK219M (PS) X12D00—(Case lots 10 ctns.)

Per Ctn. Size, No. to Per
in. Gauge lb. Ctn.

K220M (PS) X1D30 1/4 20 24 1.95

Per Case
KK220M (PS) X12D00—(Case lots 10 ctns.)

Per Ctn. Size, No. to Per
in. Gauge lb. Ctn.

K221M (PS) X1D30 1 18 13 1.95

Per Case
KK221M (PS) X12D00—(Case lots 10 ctns.)

Per Ctn. Size, No. to Per
in. Gauge lb. Ctn.

K222M (PS) X1D30 1 1/4 18 12 1.95

Per Case
KK222M (PS) X12D00—(Case lots 10 ctns.)

5 lbs. in ctn. Ten ctns. in case.

Sold Only In Full Cartons

ROMEX STAPLES

Listed by Underwriters' Laboratories, Inc.



A barbed staple for greater holding power.

Will take from 14 to 10 gauge, 2 and 3 wire non-metallic sheathed cable. Width 3/8 inch. Length 1 1/8 inch. Illustration shows full size.

Per Ctn. Per Ctn.

K194M (BXS) D4C2.....\$0.69

One hundred in ctn. Wt. ctn. 1 lb.

Sold Only In Full Cartons



E-Z Drive Romex

Round shank flat top. Drives straight in hard wood. This size for non-metallic cable. 1/2 x 3/8 inches No. 10 gauge wire.

Per Ctn. Per Ctn.

K195M (EZR) D2C0★.....\$0.29

One hundred in ctn. Wt. per carton 1 lb.

Sold Only In Full Cartons

CABLE STRAPS



Handy Strap

For non-metallic sheathed small type cables and copper tubing. Quick, compact and trim. Easily applied and removed.

Plated saddle straps with flat pointed nails, that cannot come out. Ready for use. Can be nailed to very narrow places without danger of splitting the supports.

Per Pkg. Per Pkg.

K209M (RA1533) D3C5★.....\$0.55

50 in pkg. Wt. pkg. 1/2 lb.

Sold Only In Full Packages

STAR ★ DENOTES BEST SELLER

SERVICE CONNECTORS

BLACKBURN HI-STRENGTH



UL and REA Approved

Made of Duroz alloys which insure good permanent clamping pressure. Thread is accurately machined to guarantee a smooth running unit. Hex Head.

		For Maximum Wire Size		Solid		Strand		Wt. ctn.		Each	
		No. in Ctn.		lbs.		No. in Ctn.		lbs.		Each	
Each											
K105M (10H)	D1C9★	10	10	25	1 1/4						\$0.29
Lots of 25	D1C7★										
K119M (8H)	D2C3★	8	8	25	3/4						.35
Lots of 25	D2C1★										
K124M (6D)	D2C6★	8	6	25	1 1/2						.39
Lots of 25	D2C4★										
K141M (4D)	D3C0★	6	4	25	2						.45
Lots of 25	D2C7★										

SOLDERLESS LUGS

BLACKBURN HI-STRENGTH

UL and REA Approved



Made of special copper alloy. One-piece compact construction to fit close quarters. Cold forged from solid wire with hex head and screw driver slot.

Range of Wire Sizes

K197M (L35H) 14 Solid to 8 Stranded.

K198M (L70H) 14 Solid to 4 Stranded.

		Wt.		Each	
		No. in Ctn.		lbs.	
		Ctn.		lbs.	
Each					
K197M (L35H)	D1C1★	25	1 1/2		\$0.15
Lots of 25	D1C0★				
K198M (L70H)	D1C4 1/2★	25	1		.22
Lots of 25	D1C3★				

WIRE CONNECTORS

Listed by Underwriters' Laboratories, Inc.

Simple,
Speedy and
CleanFor all
roughing-in
joints, fixture
hanging, con-
nections, in
appliances,
fixtures,machinery, tools, signs, radio work. Saves solder
and tape, plug connections, terminal blocks,
binding posts.Bakelite composition, with self-threading
metal core. To use, just skin or bare solid wires
about 1/2-inch. Stranded wires about 3/4-inch.
Screw on connector as you would a nut on a bolt.For Fixture Wiring, Joints in Shallow
Canopies, Signs, Etc.For joining combinations of Nos. 14, 16 and
18 wires. Solid or stranded up to a maximum
of 2—No. 14 and 2—No. 18 or 4—No. 16 or 5—
No. 18 Awg. wires or equal combinations.

In Boxes of 100

Per Box	Per Box
K1094M (73B) X1D20.....	\$1.95
Wt. box 1/4 lb.	

Sold Only In Full Boxes

For Making All The Joints of
Common Wiring PracticeFor joining combinations of Nos. 12, 14, 16
and 18 wires. Solid or stranded up to a maxi-
mum of 2—No. 12 and 1—No. 18 or 4—No. 14
and 1—No. 18 Awg. wires or equal combinations.

In Boxes of 100

Per Box	Per Box
K1095M (74B) X1D45.....	\$2.35
Wt. box 1 lb.	

Sold Only In Full Boxes

For joining combinations of Nos. 10, 12, 14,
16 and 18 Awg. Solid or stranded wires up to a
maximum of 3—No. 10 with 1—No. 18, 4—No.
12 with 1—No. 18 Awg. 6—No. 14 with 1—No.
18 or equal combinations.


In Boxes of 100

Per Box	Per Box
K1096M (76B) X2D65.....	\$4.25
Wt. box 3 lbs.	

Sold Only In Full Boxes

GROUND CLAMPS

Listed by Underwriters' Laboratories, Inc.

Solderless with V-shape reversible clamp.
Fits Nos. 10, 8, 6 or 4 gauge bare or insulated
copper wire and takes 1/2-inch to 1-inch water
pipe or 1/2-inch to 1-inch ground rod. The holes
through the deck run at right angles to each
other, permitting ground wire to be inserted from
any side. The screw when tightened, wedges the
wire into a cup in the center of fitting. Making
a good band and positive grip. Made of cast
bronze metal.

Each	Each
K1092M (G45) D3C2★.....	\$0.49

Two hundred in a standard package
Wt. pkg. 50 lbs.

Type WB

Type WB ground rod clamps cast from alum-
inum bronze furnished with large hexagon head
set screw.High tensile strength cast aluminum bronze
eliminates stretching, loosening and season
cracking. Cast ground rod clamp meets the
need of better grounding at lower cost. This
clamp assures perfect alignment between rod
and wire under high pressure.

Specifications:

Rod size, inch	Min. and max. wire size
K1089M-WB 1/2 3/4	10 solid—2 stranded
K1090M-WB 3/8 1/2	10 solid—1/0 stranded

Each	Size rod	Wt. per Pkg., lbs.	Each
K1089M (WB) D3C0	1/2	20	\$0.45
K1090M (WB) D4C0	3/8	23	.60

One hundred in a standard package

GROUND RODS

Listed by Underwriters' Laboratories, Inc.



PREMAX

Ideal for R. E. A. Work

For Electrical Installation

Copper Plated Steel

Premax ground rods are simple
and effective. Pig tail type. Length
8 feet.

1/2 Inch Diameter

Per Bundle	Each
0-RP88-M X6D75★.....	\$2.00

Five in bdl. Wt. bdl. 28 3/4 lbs.

Sold Only In Full Bundles

Ideal for R. E. A.
WorkFor Electrical
Installation

Copper Plated Steel

With Ground Clamp

3/8 Inch Diameter
Length 8 Feet

Per Bundle	Each
0-RP108C-M X12D00★.....	\$3.00

Five in bdl. Wt. bdl. 35 lbs.

1/2 Inch Diameter
Length 8 Feet

Per Bundle	Each
0-128S-M X8D50.....	\$2.65

Five in bdl. Wt. bdl. 30 lbs.

Sold Only In Full Bundles

SWITCH BOXES

P. P. INC.



Fiber Glass

Made of fiber glass and reinforced with reinforced Polyester. Resist corrosion or deterioration. Ideal for farm buildings, seacoast locations, industrial plants, anywhere rust or corrosion is a problem. Protects against short circuits and eliminates grounding box because it is an excellent insulator itself.

Clamps hold cables securely without damage to insulation. All knockouts easily accommodate standard wire sizes and are quick and simple to remove.

With mounting ears for old work.

(9311E)

Each		Each
K55M	D3C1	80.45
KX55M	D2C8 (Case lots 50)	

Fifty in std. pkg. Wt. pkg. 17 lbs.

SWITCH BOXES

Listed by Underwriters' Laboratories, Inc.

GEM DANDY



Designed Especially for "Cut-In" Work

To do that job in old walls that heretofore no other was equipped to do without the aid of special clamps purchased independently.

14 gauge steel plated finish.

Capacity—Approximately 11.25 cu. in.

Length—3 inches

Width—2 inches

Depth—2 5/8 inches

2 pryouts with one clamp in one end for 6 knockouts for 3/4 inch conduit

2 in each side

1 in bottom

1 in one end

(CB/8C)

Each	Zone 1	Zone 2	Zone 3
K88M	D3C8	D4C0	D4C1
KX88M (Case lots 50)	D3C6	D3C7	D3C9

Fifty in std. Pkg. Wt. pkg. 31 lbs.

ZONE 1. Illinois, Indiana, Ohio, Kentucky, Virginia, West Virginia, Pennsylvania, and lower half of Wisconsin. The area south of a line extending from Minneapolis, Minn. to Green Bay, Wisc.; Burlington, Iowa; Clinton, Iowa; Davenport, Iowa; Dubuque, Iowa; Duluth, Minn.; Mankato, Minn.; Minneapolis, Minn.; St. Paul, Minn.; Hannibal, Mo.; St. Louis, Mo.

ZONE 2. North Dakota, South Dakota, Nebraska, Kansas, Arkansas (except Texarkana, which is in zone 3), Tennessee, Mississippi, Alabama (except Mobile which is in zone 3), Georgia, North Carolina and South Carolina, Minnesota (except Duluth, Mankato, Minneapolis and St. Paul which are in zone 1), Iowa (except Burlington, Clinton, Davenport and Dubuque which are in zone 1), Missouri (except Hannibal and St. Louis which are in zone 1), upper half of Wisconsin area north of a line extending from Minneapolis, Minn. to Green Bay, Wisc.

ZONE 3. Washington, Oregon, California, Wyoming, Idaho, Montana, Nevada, Utah, Colorado, Arizona, New Mexico, Oklahoma, Texas, Louisiana, Texarkana, Arkansas (balance of Arkansas is in zone 2), Florida.

June 10, 1959. INSERT IN YOUR CATALOG OPPOSITE SEC. 18 PAGE 11

MERCHANDISE MANAGER'S SPECIAL PROMOTION

SWITCH BOXES

Each
K55M

Regular Price
D3C1

Special Price
D2C2

SWITCH BOXES

Listed by Underwriters' Laboratories, Inc.

APPLETON



For Use with TW Building Wire and Romex Cable. Complete with Clamps.

3 inches long, 2 inches wide, 2 1/4 inches deep. With single screw adjustable mounting ears for old or new work. Nail holes and alignment ridges on side plates. Galvanized finish.

(RF)

Each	Zone 1	Zone 2	Zone 3
K63M	D2C3 1/2	D2C5	D2C6 1/2
6-K63M	D2C1 1/2	D2C2 1/2	D2C4

(C. L. 50)
Fifty in std. pkg. Wt. pkg. 31 1/2 lbs.



Gangable

For non-metallic sheathed cable or flexible tubing. Size 3x2x2 1/4 inches. R type clamp. Wiring capacity cubic inches—12.8.

Knockouts—Each end (2 loom or Romex). Each side 2 loom or Romex. Bottom (1—1/2 inch conduit).

(LR)

Each	Zone 1	Zone 2	Zone 3
K61M	D2C6	D2C8	D2C9
KX61M	D2C4 1/2	D2C6	D2C7 1/4

(Case lots 50)
Fifty in std. pkg. Wt. pkg. 37 lbs.

For Use with Romex Cable; Complete with Clamps.

Extra Shallow Pattern

Size 3 inches long, 2 inches wide, 1 3/4 inches deep. Galvanized finish.

(LSSH)

Each	Zone 1	Zone 2	Zone 3
K62M	D2C2	D2C3 1/2	D2C4 1/2
KX62M	D2C0 1/2	D2C2	D2C3

(C. L. 50)
Fifty in std. pkg. Wt. pkg. 39 lbs.

- ZONE 1.** Illinois, Indiana, Ohio, Kentucky, Virginia, West Virginia, Pennsylvania, and lower half of Wisconsin. The area south of a line extending from Minneapolis, Minn. to Green Bay, Wisc.; Burlington, Iowa; Clinton, Iowa; Davenport, Iowa; Dubuque, Iowa; Duluth, Minn.; Mankato, Minn.; Minneapolis, Minn.; St. Paul, Minn.; Hannibal, Mo.; St. Louis, Mo.
- ZONE 2.** North Dakota, South Dakota, Nebraska, Kansas, Arkansas (except Texarkana, which is in zone 3), Tennessee, Mississippi, Alabama (except Mobile which is in zone 3), Georgia, North Carolina and South Carolina, Minnesota (except Duluth, Mankato, Minneapolis and St. Paul which are in zone 1), Iowa (except Burlington, Clinton, Davenport and Dubuque which are in zone 1), Missouri (except Hannibal and St. Louis which are in zone 1), upper half of Wisconsin area north of a line extending from Minneapolis, Minn. to Green Bay, Wisc.
- ZONE 3.** Washington, Oregon, California, Wyoming, Idaho, Montana, Nevada, Utah, Colorado, Arizona, New Mexico, Oklahoma, Texas, Louisiana, Texarkana, Arkansas (balance of Arkansas is in zone 2), Florida.

STAR ★ DENOTES BEST SELLER

APPLETON



For Use with Rigid or Thin Wall Conduit 3 inches long, 2 inches wide.

1/2 inch knockout, one in each end, two in each side and one in center bottom. With standard reversible mounting ears for old or new work. Galvanized finish.

Deep Pattern 2 1/2 inches. 1/2-inch K. O. (L2)


Each	Zone 1	Zone 2	Zone 3
K56M	D2C2 1/2	D2C3 1/2	D2C4 1/2
KX56M	D2C1	D2C2	D2C3

(C. L. 50)
Fifty in std. pkg. Wt. pkg. 35 lbs.

Shallow Pattern 2 inches. 1/2-inch K. O. (L22)

Each	Zone 1	Zone 2	Zone 3
K57M	D2C0 1/2	D2C1 1/2	D2C2 1/4
KX57M	D1C9	D2C0	D2C1

(C. L. 50)
Fifty in std. pkg. Wt. pkg. 29 lbs.

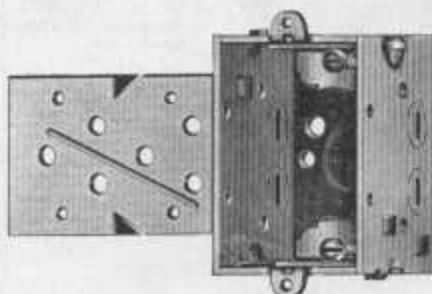

For Use with Romex Cable. Complete with Clamps.

Box 3 inches long, 2 inches wide, 2 1/4 inches deep. Bracket 2x3 inches. Two pryouts in each end and two knockouts in each side. One knockout in bottom to accommodate 1/2-inch conduit, fixture stud or box connector. With mounting bracket. Galvanized finish.

(LRB)

Each	Zone 1	Zone 2	Zone 3
K67M	D2C9	D3C0 1/2	D3C2
KX67M	D2C6 1/2	D2C8	D2C9 1/2

(C. L. 50)
Fifty in std. pkg. Wt. pkg. 43 lbs.

APPLETON



For Use with TW Building Wire or Romex Cable. Complete with Clamps.


Box 3 inches long, 2 inches wide, 2 1/4 inches deep.

Knockout two pryouts in each beveled corner and two in each side; also one knockout in center of bottom to accommodate 1/2-inch conduit; with strap mounting bracket for nailing, brackets attached to box for 3/4-inch thick plaster wall. By breaking of gauging ear, box can be mounted on walls up to 1 1/4 inches. Galvanized finish.

(AFO)

Each	Zone 1	Zone 2	Zone 3
K66M	D2C5	D2C6	D2C7 1/2
KX66M	D2C3	D2C4	D2C5 1/4

(C. L. 50)
Fifty in std. pkg. Wt. pkg. 34 lbs.

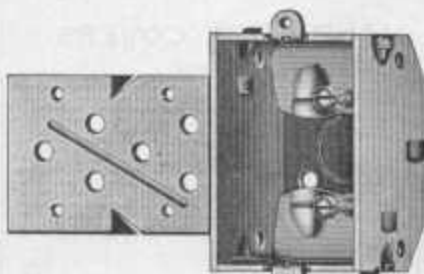

For Use with TW Building Wire or Romex Cable. Complete with Clamps.

Box 3 inches long, 2 inches wide, 2 1/4 inches deep. Bracket 2x3 inches. Knockout two pryouts in each beveled corner and one knockout in center of bottom to accommodate 1/2 inch conduit. With mounting bracket. Galvanized finish.

(AFB)

Each	Zone 1	Zone 2	Zone 3
K65M	D2C6	D2C7 1/4	D2C9
KX65M	D2C4	D2C5 1/4	D2C7

(C. L. 50)
Fifty in std. pkg. Wt. pkg. 38 lbs.

HANDY CONDUIT BOXES

Listed by Underwriters' Laboratories, Inc.

APPLETON



For Use with Rigid or Thin Wall Conduit

Dimensions: 4 inches long, 2 1/4 inches wide, 1 1/4 inches deep.

Knockouts 1/2-inch, three in each side, one in each end and one in bottom for 1/2-inch conduit.

Box designed for use with standard metal or bakelite flush wall plates or with handy box covers. Galvanized finish.

(172)

Each	Zone 1	Zone 2	Zone 3
K71M	D2C1★	D2C2★	D2C3 1/2★
KX71M	D1C9 1/2★	D2C0 1/2★	D2C2 1/2★

—(Case lots 50)

Fifty in std. pkg. Wt. pkg. 29 1/2 lbs.

HANDY BOX COVERS

Cadillite Plated

Made to fit Handy Boxes.

Single Gang, Toggle

Each	Each
K110M (1510)	D0C5 1/2★

... \$0.10

Single Gang, Duplex Receptacle

Each	Each
K111M (1513)	D0C5 1/2★

... \$0.10

Single Gang, Blank

(1U)


Each	Zone 1	Zone 2	Zone 3
K118M	D0C5 1/2	D0C5 3/4	D0C6

Twenty-five in ctn. Wt. ctn. 1 1/4 lbs.

SWITCH BOX SUPPORTS

Listed by Underwriters' Laboratories, Inc.

HOLD-IT



Two metal holders for installing switch boxes in old work or walls of beaverboard, sheetrock and metal lath.

Per Set	Per Set
K196M (156)	D0C7★

... \$0.10

One set in an envelope. 500 sets in pkg.
Wt. pkg. 40 lbs.

4-INCH SQUARE BOXES

Listed by Underwriters' Laboratories, Inc.

APPLETON



For Use with Rigid or Thin Wall Conduit or Box Connectors

1/2-inch K. O., 3 on two sides, 5 in bottom. 1 1/2 inches deep, galvanized finish.

(442)

Each	Zone 1	Zone 2	Zone 3
K54M	D2C6	D2C8	D2C9
KX54M	D2C4 1/2	D2C6	D2C7

—(Case lots 50)

Fifty in std. pkg. Wt. pkg. 44 lbs.

4-INCH SQUARE BOX COVERS

Listed by Underwriters' Laboratories, Inc.

APPLETON

Flat Blank

Galvanized finish.



(41F)

Each	Zone 1	Zone 2	Zone 3
K123M	D0C9	D1C0	D1C1

50 in standard pkg. Wt. pkg. 10 lbs.

For Zone Information See Section 18—Page 13

STAR ★ DENOTES BEST SELLER

4 11/16-INCH SQUARE BOXES

Listed by Underwriters' Laboratories, Inc.

APPLETON



For use with flush electric range and dryer receptacles and other devices.

4 11/16 inches square, 2 3/8 inches deep, 1 inch K.O. in each side and combination of two 3/4

inch and three 1/2 inch K.O. in bottom. Galvanized finish.

(4SJD-1)

Each	Zone 1	Zone 2	Zone 3
K50M	D4C8	D5C1	D5C3 1/2
KX50M	D4C5	D4C7 1/2	D4C9

—(Case lots 50)

Fifty in std. pkg. Wt. 64 lbs.

4 11/16-INCH SQUARE BOX COVERS

Listed by Underwriters' Laboratories, Inc.

APPLETON



For use with flush electric range or dryer receptacles or for two single flush devices.

Raised, 3/4 inch; galvanized finish.

(8486)

Each	Zone 1	Zone 2	Zone 3
K120M	D3C1	D3C2 1/2	D3C4
KX120M	D2C8	D2C9 1/2	D3C1

—(Case lots 50)

Fifty in std. pkg. Wt. 23 lbs.

OCTAGON BOXES

Listed by Underwriters' Laboratories, Inc.

APPLETON



For Use with Non-Metallic Sheathed Cable, Complete with Clamps

1/2-inch K. O., 2 in sides, 1 in bottom, 3/4-inch cable K. O., 4 in sides, 4 in bottom. 1 1/2 inches deep. Galvanized finish.

4-INCH OCTAGON

(402R)

Each	Zone 1	Zone 2	Zone 3
K51M	D2C7 1/2 ★	D2C9 ★	D3C1 ★
6-K51M	D2C5 ★	D2C6 1/2 ★	D2C8 ★

—(Case lots 50)

Fifty in std. pkg. Wt. pkg. 35 lbs.

3 1/4-INCH OCTAGON

(302R)

Each	Zone 1	Zone 2	Zone 3
K46M	D2C7 1/2 ★	D2C9 1/2 ★	D3C1 ★
KX46M	D2C5 ★	D2C6 1/2 ★	D2C8 ★

—(Case lots 50)

Fifty in std. pkg. Wt. pkg. 27 lbs.



For Use with Non-metallic Sheathed Cable, Complete with Clamps and Mounting Ears

3/4-inch K. O., 4 in sides, 2 in bottom. 3/4-inch cable K. O., 4 in sides, 4 in bottom. 1 1/2 inches deep, galvanized finish.

4-INCH OCTAGON

(402R/WE)

Each	Zone 1	Zone 2	Zone 3
K52M	D3C5	D3C8	D3C9
KX52M	D3C3	D3C5	D3C6

—(Case lots 50)

Fifty in std. pkg. Wt. pkg. 32 1/2 lbs.

APPLETON



For Use with Rigid or Thin Wall Conduit or Box Connectors 1/2-inch K. O.

K. O. 4 in sides, 5 in bottom. 1 1/2 inches deep, galvanized finish.

4-INCH OCTAGON

(402)

Each	Zone 1	Zone 2	Zone 3
K49M	D1C8 1/2 ★	D1C9 1/2 ★	D2C0 1/2 ★
KX49M	D1C7 ★	D1C8 ★	D1C9 ★

—(Case lots 50)

Fifty in std. pkg. Wt. pkg. 33 lbs.

3 1/4-INCH OCTAGON

1/2-inch K. O.

K. O., 4 in sides, 1 in bottom. 1 1/2 inches deep, galvanized finish.

(302)

Each	Zone 1	Zone 2	Zone 3
K44M	D1C8 1/2	D1C9 1/2	D2C0 1/2
KX44M	D1C7	D1C8	D1C9

—(Case lots 50)

Fifty in std. pkg. Wt. pkg. 25 1/2 lbs.

CEILING BOXES

APPLETON



Shallow Steel

Diameter 3 1/2 inches. Depth 3/4 inch. 1/2 inch K. O. in bottom. 4 cable. M type clamp, for use with Romex and BX type cable.

(34C)

Each	Zone 1	Zone 2	Zone 3
K92M	D2C2 1/2 ★	D2C3 1/2 ★	D2C4 1/2 ★
KX92M	D2C1 ★	D2C2 ★	D2C4 ★

—(Case lots 50)

Fifty in standard pkg. Wt. pkg. 22 1/2 lbs.

4-INCH BOX COVERS

Listed by Underwriter's Laboratories, Inc.



Flat Covers

Plain Blank—Galvanized Finish

Each	Each
K108M (G54C1) D0C7 1/2 ★	\$0.10
KK108M (G54C1) D0C5 1/2 ★	—(Case Lots 100)

1/2 Inch Knockout—Galvanized Finish

Each	Each
K109M (G54C5) D0C8	\$0.11
KK109M (G54C6) D0C7	—(Case Lots 100)

One hundred in ctn. Wt. ctn. 30 lbs.

3 1/4-INCH BOX COVERS

Listed by Underwriter's Laboratories, Inc.



Flat Covers

Plain Blank—Galvanized Finish

Each	Each
K106M (G24C1) D0C6 ★	\$0.09
KK106M (G24C1) D0C5 1/2 ★	—(Case Lots 250)

Wt. pkg. 50 lbs.

BAR HANGERS

Listed by Underwriters' Laboratories, Inc.

APPLETON



For Boxes 1 1/2 inches Deep

This Practical Box Hanger is Made with Offset Feature for all Standard Boxes; Equipped with 3/4-inch New Set Screw Fixture Stud which Locks Box Firmly in Position; needs no Lock Nut; Length Over All 19 1/4 inches.

Shallow Offset Type—1 5/16 inch Deep (HH)

Each	Zone 1	Zone 2	Zone 3
K150M	D2C4 1/4 ★	D2C5 1/2 ★	D2C7 ★
KX150M	D2C2 ★	D2C3 ★	D2C4 1/2 ★

—(Case lots 50)

Fifty in ctn. Wt. ctn. 29 lbs.

Deep Offset Type—1 1/16 inch Deep

(21D)

Each	Zone 1	Zone 2	Zone 3
K152M	D2C6	D2C7 1/2	D2C9
KX152M	D2C3 1/2	D2C5	D2C6

Fifty in ctn. Wt. ctn. 31 1/2 lbs.

For Zone Information See Section 18—Page 13

STAR ★ DENOTES BEST SELLER

ELECTRIC POULTRY HOUSE TIME SWITCHES

PARAGON
Poultry House



Leading poultry raisers recognize the value of artificial lighting in laying houses, particularly during the months of limited daylight. Controlled lighting in fall and winter stimulates laying activity in poultry.

Portable, use anywhere. Easy to connect. Just plug into 115 volt A. C. outlet. Easy-to-set for any automatic lighting schedule. Accurate, dependable genuine Telechron clock motor. Guaranteed by America's leading time switch manufacturer. Makes possible the regularity required in poultry house lighting morning and evening. Keeps "daylight" uniform. A dimmer circuit induces hens to roost safely before "lights out": essential for healthy birds, good production.

Each	Each
6-PIP-M X9D07.....	\$13.95
Lots of 6 X8D37	

One in ctn. Wt. ctn. 3½ lbs.

ELECTRIC TIME SWITCHES

Listed by Underwriters' Laboratories, Inc.

PARAGON



Accurate and dependable time switch for controlling signs, commercial lights, show window lights, apartment hall lights, attic fans, stokers, oil burners, blowers, pumps, valves, motors, etc. Snap action silver contact switch may be hand tripped ahead of automatic setting without disturbing future sequence of operation.

Steel case 7½×4½×3½ inches designed for wall mounting with knockouts in back, bottom and sides. Hinged cover with hasp.


Straight on and off. Industrial, type self-starting motor. Switch capacity 3000 watts per pole. S. P. S. T. switch.

120 volts—60 cycle—30 amperes

Each	Each
6-3001-M X7D12.....	\$10.95
Lots of 6 X6D57	


One in ctn. Wt. ctn. 3½ lbs.

Stab-lok Circuit Breakers

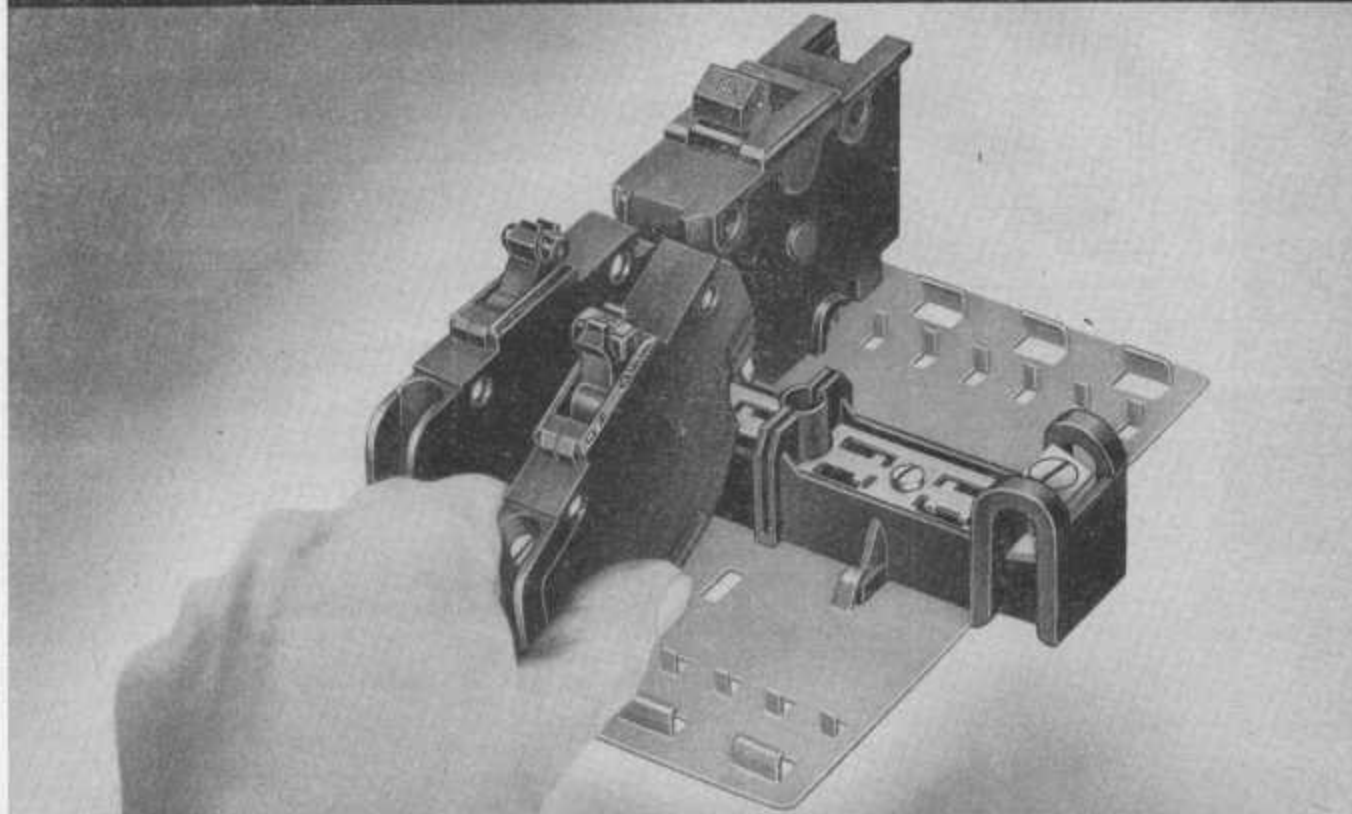

Simplest, Safest, Most Flexible Circuit Breaker System

Just Snap Stab-Loks in Place




Stab-lok Circuit Breaker is easiest of all over-current devices to insert. Merely slide the end of the breaker over the sturdy metal hook and press the 4-way stabs into the proper slot in the bussing.

Combination Flush-Surface Enclosures



Contributing to the popularity of Stab-lok Circuit Breakers is the few enclosures required because of the NOARK Combination Flush-Surface enclosure. Device is shipped for surface mounting; removal of frame prepares enclosure for neat, flush mounting.

Increased Flexibility—Lower Cost!

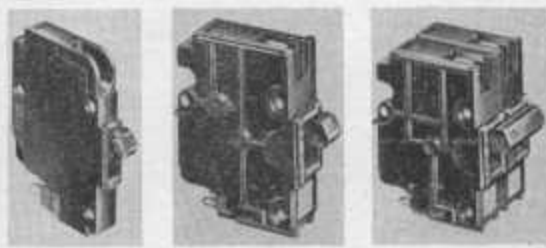

**1/2" SINGLE POLE
STAB-LOK NC**

**1" SINGLE POLE
STAB-LOK NA**

**DOUBLE POLE
STAB-LOK NA**

Thin, Type NC permits increased enclosure circuit capacity; single pole Type NA is the famous "millions-tested" breaker; common trip operation of double pole Type NA automatically disconnects both poles on a short circuit or overload. All have cooperative thermal-magnetic action, ambient compensation, and Underwriters' approval.

FEDERAL-PACIFIC STAB-LOK ENCLOSED CIRCUIT BREAKERS

\$100.00 List or More... D5C0%

Less than \$100.00 List... D4C5%


SUITABLE FOR USE AS SERVICE EQUIPMENT

Listed by Underwriters' Laboratories, Inc.

Single Phase, 3 Wire SN Insulated (Groundable) Neutral, 120/240 V., A.C.

CIRCUIT BREAKER ENCLOSURES

WIRING DIAGRAM



30 Ampere Mains Maximum

K361M-102-2
Surface
Enclosure

Enclosure Capacity

1 double pole (simultaneous trip) or 2 single pole Stab-lok breakers type NA or NC or 1 single pole and *1 F. S. for use on single phase 2 wire S. N. insulated (groundable) neutral 120 V., A.C.


SURFACE TYPE

Height 5 $\frac{5}{16}$ inches. Width 3 $\frac{3}{4}$ inches. Depth 2 $\frac{1}{2}$ inches.

Less Circuit Breakers

Each				▲ Each
K361M	(102-2)	X1D82		\$3.30
KK361M	(102-2)	X1D82—(Case lots 10)		

Packed 10 enclosures to case. Wt. case 20 lbs.

K362M-102-4S
Surface Enclosure
or K363M-102-4F
Flush Enclosure50 Ampere Mains
Maximum

Enclosure Capacity

Two single pole type NA or 4 single pole type NC or one double pole (simultaneous trip) Stab-lok breakers.

Surface

Height 7 $\frac{3}{4}$ inches. Width 4 $\frac{3}{4}$ inches. Depth 2 $\frac{9}{16}$ inches.

Flush

Box: Height 7 $\frac{3}{4}$ inches. Width 4 $\frac{3}{4}$ inches. Depth 2 $\frac{9}{16}$ inches. Trim: 9x8 inches.

Less Circuit Breakers—Surface Type


Each				▲ Each
K362M	(102-4S)	X3D14		\$5.70
KK362M	(102-4S)	X3D14—(Case lots 10)		

Packed 10 enclosures to case. Wt. case 32 lbs.

Less Circuit Breakers—Flush Type

K363M	(102-4F)	X3D14		5.70
KK363M	(102-4F)	X3D14—(Case lots 10)		

Packed 10 enclosures to case. Wt. case 32 lbs.

104-8S
Surface Enclosure
or 104-8F
Flush Enclosure

6 CIRCUIT NEUTRAL

Cat. No. 104-B

Enclosure Capacity

4 single pole Stab-loks type NA or 8 single pole type NC or 2 double pole (simultaneous trip) Stab-lok.

Height 8 $\frac{7}{8}$ inches. Width 7 $\frac{1}{2}$ inches. Depth 3 $\frac{1}{16}$ inches.

Less Circuit Breakers


SURFACE TYPE

Each				▲ Each
6-104-8S-M	X3D30★			\$6.00

FLUSH TYPE

6-104-8F-M	X3D30★			6.00
------------	--------	--	--	------

Individually packaged. Wt. each 6 lbs.

108-16SF
Combination
Flush-Surface
Enclosure

16 CIRCUIT NEUTRAL

Cat. No. 108-1A

Enclosure Capacity

8 single pole Stab-loks type NA or 16 single pole type NC or 8 double pole (simultaneous trip) Stab-loks. By feeding load side of double pole breaker panel would then be disconnected by main circuit breaker 100 amp. max. (100A bkr. cata. No. 2P100 uses 8 S.P. NA. spaces. 70A bkr. cata. No. 2P70 uses only 2 S.P. NA. spaces.) For surface or flush installation.

Height 11 $\frac{1}{2}$ inches. Width 8 inches. Depth 3 $\frac{3}{4}$ inches.

Less Circuit Breakers

Each				▲ Each
6-108-16SF-M	X6D55★			\$11.00

Individually packaged. Wt. each 9 lbs.

All Federal-Pacific switches, circuit breakers, etc., may be assorted. Full freight allowed to destination when shipped from factory, F. O. B. St. Louis, Mo. or Newark, N. J. Lots of 300 lbs. or more. D1C0% less than stock quantity price.

STAR ★ DENOTES BEST SELLER

FEDERAL-PACIFIC STAB-LOK ENCLOSED CIRCUIT BREAKERS

SUITABLE FOR USE AS SERVICE EQUIPMENT

\$100.00 List or More..... D5C0%

Less than \$100.00 List..... D4C5%


Listed by Underwriters' Laboratories, Inc.

Single Phase, 3 Wire SN Insulated (Groundable) Neutral, 120/240 V., A.C.

Circuit Breaker Enclosure

Combination
Flush-Surface Enclosure

Wiring Diagram



Enclosure Capacity

16 Single Pole Stab-Loks Type NA or 24 Single Pole Stab-Loks Type NC
—or 8 Double Pole (simultaneous trip) Stab-Loks. 125 ampere main lug capacity. For surface or flush installation.

Height 15 $\frac{3}{8}$ inches—Width 11 $\frac{3}{8}$ inches—Depth 3 $\frac{3}{8}$ inches

Less Circuit Breakers

Each

6-116-24SF-M X13D15.....

▲ Each


\$23.90

One in ctn. Wt. ctn. 16 lbs.

Circuit Breaker Enclosure

Combination
Flush-Surface Enclosure

Wiring Diagram



This is a flexible panelboard which can be used in a number of different ways ultimately determined by the installing electrician. Probably the best known nationally accepted method of wiring (except for local inspection modifications, if any), is to arrange the panelboard as 6 multiple mains thereby producing as depicted by the accompanying wiring diagram.

3—230 volt 3 wire circuits

14—115 volt 2 wire circuits

using to full advantage the 125 ampere main lug capacity.

Height 15 $\frac{3}{8}$ inches—Width 11 $\frac{3}{8}$ inches—Depth 3 $\frac{3}{8}$ inches

Less Circuit Breakers

Each

4-1306-12-M X14D25.....

▲ Each

\$25.90

One in ctn. Wt. ctn. 16 lbs.

Items marked ✚ not carried in stock. Can only be furnished by shipping direct from factory, F.O.B. St. Louis, Mo. or Newark, N. J.

All Federal-Pacific Switches, Circuit Breakers, etc., may be assorted—Full Freight allowed to destination when shipped from factory F.O.B., St. Louis, Mo. or Newark, N. J. Lots of 300 lbs. or more. D1C0% less than stock quantity price.

FEDERAL-PACIFIC STAB-LOK CIRCUIT BREAKERS

\$100.00 List or More... D6C0%
Less than \$100.00 List... D4C5%

Listed by Underwriters' Laboratories, Inc.

Type NC

The exclusive $\frac{1}{2}$ inch Federal-Pacific Stab-Lok Circuit Breakers built with an improved cooperative thermal-magnetic trip action are approved by Underwriters' Laboratories, Inc.

Single Pole— $\frac{1}{2}$ inch Thick

Each		Ampere Rating	No. in Ctn.	Quantity in Std. Pkg.	Wt. Pkg., lbs.	▲ Each
K331M (015)	X1D71	15	10	60	11	\$3.10
K334M (020)	X1D71	20	10	60	11	3.10

Type NA

The exclusive 1 inch Federal-Pacific Stab-Lok Circuit Breakers, built with an improved cooperative thermal-magnetic trip action are approved by Underwriters' Laboratories, Inc.

Single Pole—1 inch Thick

Each		Ampere Rating	No. in Ctn.	Quantity in Std. Pkg.	Wt. Pkg., lbs.	▲ Each
K364M (15)	X1D71★	15	10	60	18	\$3.10
K365M (20)	X1D71★	20	10	60	18	3.10
K366M (30)	X1D71	30	10	60	18	3.10
K372M (50)	X1D71	50	10	60	18	3.10

Type NA

2 inch double pole Stab-Loks are the only low cost circuit breakers designed for simultaneous trip operation. When a short circuit or overload occurs on one pole, both poles are automatically disconnected on the line.

Double Pole—2 inch Thick

Each		Ampere Rating	No. in Ctn.	Quantity in Std. Pkg.	Wt. Pkg., lbs.	▲ Each
K370M (250)	X3D80	50	5	30	18	6.90

SAFETY SWITCHES

\$100.00 List or More... D5C0%
Less than \$100.00 List... D4C5%

Listed by Underwriters' Laboratories, Inc.

Suitable For Use As Service Equipment

FEDERAL-PACIFIC—Type D—Positive Make



For use as an entrance switch in communities where Meter Trim Type Switches are not required. Also ideal on oil burner, refrigerator and similar installations. Solderless connectors.

Baked gray enameled. Solid end with knockouts.

Single Throw

30 Amperes—Plug Fuse Type—125-250 Volts

Fusible

Cabinet Size—7 $\frac{1}{8}$ inches High, 5 $\frac{1}{8}$ inches Wide, 4 inches Deep

Each		Poles	Fuses	Horse Power Rating			Wt. lbs. ▲	Each
				120 Volt		240 Volt		
				Single	Phase			
K313M	(0322) X3D58★	2	2	¾ HP	1½ HP	3	\$6.50	
KX313M	(0322) X3D58★	(Case lots 5 only)						

Solid Neutral

Cabinet Size—5 $\frac{1}{8}$ inches High, 4 $\frac{1}{8}$ inches Wide, 3 $\frac{3}{4}$ inches Deep

K311M (0311SN)	X2D75	2	1	$\frac{3}{4}$ HP	—	2 $\frac{1}{2}$	5.00
KX311M (0311SN)	X2D75	(Case lots 5 only)					

Cabinet Size—7 $\frac{1}{8}$ inches High, 5 $\frac{1}{8}$ inches Wide, 4 inches Deep

K315M	(0322SN)	X3D58★	1	2	$\frac{3}{4}$ HP	1 $\frac{1}{2}$ HP	2 $\frac{1}{2}$	6.50
6-K315M	(0322SN)	X3D58★	(Case lots 5 only)					
Five in ctn.								


All Federal-Pacific Switches, Circuit Breakers, etc., may be assorted—Full Freight allowed to destination when shipped from factory F. O. B. St. Louis, Mo. or Newark, N. J. Lots of 300 lbs. or more. D1C0% less than stock quantity price.

STAR ★ DENOTES BEST SELLER



SERVICE ENTRANCE, RANGE AND DISTRIBUTION SWITCHES

Listed by Underwriters' Laboratories, Inc.

FEDERAL-PACIFIC—Wiring Sequence, Meter-Switch-Fuse

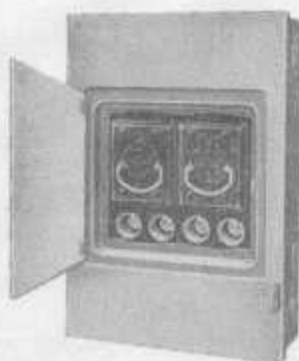\$100.00 List or More D5C0%
Less than \$100.00 List D4C5%

No. 264

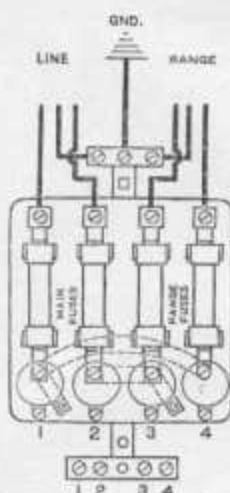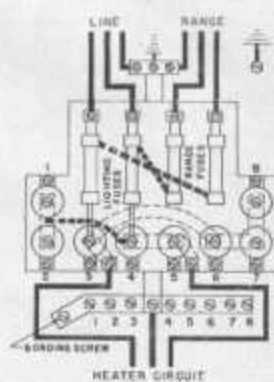Wiring Diagram of No. 264,
ER264, 464 and SimilarWiring Diagram of Nos. 268C, 468C
and Similar

3 Poles—60 Amperes—Grounded Neutral—125-250 Volts

Fuses—Branch fuses (30 Amperes)

All circuits including range circuit are disconnected when main switch is pulled.

The main and range circuit fuses are held in fuse clips attached to the switch blades which are mounted on removable fuse holders. Main and range fuses are inserted from ends of puller heads. The switching action is accomplished by simply removing or inserting the fuse holders. The circuits are broken at the switch contacts recessed in the main block to preclude accidental contact. Two main fuses, two range fuses. Provides water heater taps which may be used for heaters of either 110 or 220 volts. Plastic block, Aluminum finish cabinet.

Surface Mounting

Each		Circuits	Ampere	Poles	Fuses	Plug fuse Br. Cr.	Size Cabinet, ins.			Wt. each, lbs.	▲ Each
							Width	Height	Depth		
6-264-M	X8D80★	4	60	3	2	4	8 $\frac{3}{4}$	14 $\frac{1}{2}$	3 $\frac{3}{4}$	11	\$16.00
6-266-M	X16D23	6	60	3	2	6	9 $\frac{3}{4}$	17 $\frac{1}{2}$	3 $\frac{3}{4}$	15	29.50
6-268C-M	X18D70	8	100	3	2	8	12 $\frac{1}{2}$	13	3 $\frac{3}{4}$	16	34.00

Flush Mounting

6-464-M	X8D80★	4	60	3	2	4	8 $\frac{3}{4}$	14 $\frac{1}{2}$	3 $\frac{3}{4}$	11	16.00
6-466-M	X16D23	6	60	3	2	6	9 $\frac{3}{4}$	17 $\frac{1}{2}$	3 $\frac{3}{4}$	15	29.50
6-468C-M	X18D70	8	100	3	2	8	12 $\frac{1}{2}$	14 $\frac{1}{16}$	3 $\frac{3}{4}$	16	34.00

Raintight Range Switches

Same as No. 264 except in a Raintight Surface Mounting Cabinet. With Conduit Hub.

Each		Hub Size, ins.	Circuits	Branch Fuses	Size Cabinet, ins.			Wt. Each, lbs.	▲ Each
					Width	Height	Depth		
✚RH264-H75-M	X15D13	3 $\frac{1}{4}$	4	4-30	8 $\frac{5}{16}$	12 $\frac{1}{4}$	3 $\frac{3}{4}$	15	\$27.50
✚RH264-H100-M	X15D13	1	4	4-30	8 $\frac{5}{16}$	12 $\frac{1}{4}$	3 $\frac{3}{4}$	15	27.50
✚RH264-H125-M	X15D13	1 $\frac{1}{4}$	4	4-30	8 $\frac{5}{16}$	12 $\frac{1}{4}$	3 $\frac{3}{4}$	15	27.50

One in carton.

Items marked ✚ not carried in stock. Can only be furnished by shipping direct from factory, F. O. B., St. Louis, Mo. or Newark, N. J.

All Federal-Pacific Switches, Circuit Breakers, etc., may be assorted—Full Freight allowed to destination when shipped from factory F. O. B. St. Louis, Mo. or Newark, N. J. Lots of 300 lbs. or more, D1C0% less than stock quantity price.

STAR ★ DENOTES BEST SELLER

SERVICE ENTRANCE RANGE AND DISTRIBUTION SWITCHES

\$100.00 List or More D5C0%
 Less than \$100.00 List ... D4C5%

Listed by Underwriters' Laboratories, Inc.

Suitable For Use As Service Equipment

FEDERAL PACIFIC



100 Ampere Main And Range Pull Switch

Increased loads required by new residential construction demanded this larger Federal Pacific main-and-range pull switch. This device in a single enclosure has capacity for:

Main: 100 ampere pullout, 125/250 volts A. C., 3 wire, SN.

Branches: (a) Two 60 ampere (or one 60 ampere and one 30 ampere) pullouts, 3 wire, SN, for range and/or water heater, clothes dryer.

(b) Ten plug fuses, 2 wire, SN branches for lighting circuits

In addition, it has bus extension lugs for feeding another centralized load panel.

It has the unique feature of split-solid-neutral construction. This design places each neutral terminal next to each lighting circuit. Wiring, and wire identification, therefore, are made easier while considerable wire is saved.

The block on this device is molded in one piece. The entire interior main-and-range switch can be removed from the enclosure, simplifying wiring. Replacing is simplified by a hook-on arrangement which automatically lines up the two hold-on screws.

125/250 Volt Single Phase, 3 Wire, Solid Neutral

Each	Type	Mains		Fuses	Puller Br. Cir. 01A, 3 Pull, SN.	Plug Fuse Br. Cir.	Weight Each, lbs.	▲ Each
		Amps	Pole					
6-12610S-M	X35D70	Surface	100	3	2	10	25	\$64.90
6-12610F-M	X35D70	Flush	100	3	2	10	25	64.90
6-12616S-M	X43D45	Surface	100	3	2	16	30	70.00
6-12616F-M	X43D45	Flush	100	3	2	16	30	70.00

One in a carton



100 Ampere Pull Switch

Designed especially for installations where space is an important factor. Yet look at these additional features. No hinged joints, your assurance of long and trouble-free service. Moreover, this pull switch is completely dead-front. Even with the puller head out, a dead-front phenolic shield covers all the live parts. "On" and "Off" positions are clearly marked.

The following overall dimensions clearly show how efficiently these switches are adapted for service in small spaces:

Enclosure	Height inches	Width inches	Depth inches
Surface	12 $\frac{3}{4}$	10 $\frac{1}{2}$	4 $\frac{1}{2}$
Flush	12 $\frac{3}{4}$	10 $\frac{1}{2}$	4 $\frac{1}{2}$

120/250 Volt Single Phase, 3 Wire Solid Neutral

Each	Type	Poles	Main Fuses	Weight Each lbs.	▲ Each
✱110-M X16D50	Surface	3SN	2	14	\$30.00
✱310-M X16D50	Flush	3SN	2	14	30.00

One in a carton

Items marked ✱ not carried in stock. Can only be furnished by shipping direct from factory, F. O. B., St. Louis, Mo. or Newark, N. J.


All Federal-Pacific Switches, Circuit Breakers, etc., may be assorted—Full Freight allowed to destination when shipped from factory, F. O. B., St. Louis, Mo. or Newark, N. J. Lots of 300 lbs. or more, D1C0% less than stock quantity price.

\$100.00 list or more... D5C0%
Less than \$100.00 list... D4C5%

SAFETY SWITCHES**FEDERAL - PACIFIC**

Listed by Underwriters' Laboratories, Inc.

Suitable for Use as Service Equipment

Type D

3332SN

Positive make. Quick break. Cabinets baked gray enameled.

230 Volts A. C.—250 Volts—Three Poles—Three Fuses

Each	Amps.	Size cabinet, ins.			Wt. box, lbs.	▲ Each
		width	height	depth		
†3332SN-M X7D92	30	6¼	7¼	2¾	5	\$14.40

One in box



Positive make. Quick break. Solderless connectors. Cabinets baked gray enameled.

Single Throw**For Cartridge Type Fuses****Insulated Solid Neutral****125-250 Volts A. C.—250 Volts D. C.**

Each	Amp.	Size cabinet, ins.			Wt. ctn., lbs.	▲ Each
		width	height	depth		
6-3622-M X8D20	60	7½	10¾	3½	8	\$14.90

One in ctn.

\$100.00 list or more... D5C0%
Less than \$100.00 list... D4C5%

RAINTIGHT SWITCHES**FEDERAL - PACIFIC**

Listed by Underwriters' Laboratories, Inc.

Suitable for Use as Service Equipment

Type D

No. RH160-H125-M

For Outdoor Use

Solderless lugs on all except 30 amperes. Cabinets have solid ends with conduit hub at top only. Baked gray enameled. Insulated solid neutral.


125-250 Volts, A. C.**Single Throw**

Each		Conduit hub, in.	Amps.	Poles	Solid Fuses	Wt. per ctn., lbs.	▲ Each
†RH0322SN-H100-M	X8D64	1	30	3	2 Plug	4	\$15.70
†RH3122-H150-M	X20D68	1½	100	3	2 Cart.	20	37.60

Pull Fuse Type

†RH160-H100-M	X8D64	1	60	3	2 Cart.	8½	15.70
6-RH160-H125-M	X8D64	1¼	60	3	2 Cart.	8¾	15.70

One in ctn.

**RAINTIGHT RANGE SWITCHES**

Same as No. 264 except in a Raintight surface mounting cabinets. See Page 21 for complete description.

4 circuit. 4-30 branch fuses.

Each		Conduit hub, in.	Size cabinet, ins.			▲ Each
			width	height	depth	
†RH264-H75-M	X15D13	¾	8½	12¾	15	\$27.50
†RH264-H100-M	X15D13	1	8½	12¾	15	27.50
†RH264-H125-M	X15D13	1¼	8½	12¾	15	27.50

One in a carton. Wt. 15 lbs.

Items marked † not carried in stock. Can only be furnished by shipping direct from factory, F. O. B., St. Louis, Mo. or Newark, N. J.

All Federal-Pacific switches, circuit breakers etc. may be assorted. Full freight allowed to destination when shipped from factory, F. O. B. St. Louis, Mo. or Newark, N. J., lots of 300 lbs. or more. D1C0% less than stock quantity price.

\$100.00 List or More D5C0%

Less than \$100.00 List . . . D4C5%

SQUARE D MAIN SERVICE SWITCHES

Listed by Underwriters' Laboratories, Inc.

FOR SINGLE PHASE CIRCUITS

WITH RANGE AND LIGHTING BRANCH CIRCUITS



Square D fuse-breaks act as switch and fuse carriers. They are non-interchangeable and may be reversed for the "ON" and "OFF" positions which are moulded in bakelite. Test holes are provided so that fuses may be tested without interrupting the service.

The interior is held to the box by only one screw, and is reversible, thus permitting the plug fusible circuits to be placed at the top if desired. The grounded neutrals are reversible and are provided with four 60-ampere and four 30 ampere connectors. Multiple bussing of main and range fuse-breaks, the line side is equipped with 100-ampere connectors. The interior is not fastened to the box for shipping. Since the interior is usually removed before wiring, this feature reduces installation time.

All switches are of dead-front construction to insure safe operation. The door over the fuses has provisions for sealing. Solderless connectors are furnished throughout (washer head screw type on 30-ampere terminals) for easy wiring, and there are 60-ampere tap-offs after main fuses for water heater circuit or mains extension. The base is made of light weight bakelite, with plug fuse receptacles that will accommodate non-temperable fuses. All boxes and covers have blue-gray enamel finish.

3 Wire—60 Amperes—Grounded Neutral—125-250 Volts

Fuses—Main fuses 60-amperes. Branch fuses (see below)

All Circuits Including Range Circuit are Disconnected when Main Switch is Pulled**SURFACE MOUNTING**

Each	S. P. Cir- cuits	Branch Fuses	Size Cabinet, ins.			Wt. Ea. lbs.	▲ Each
			Width	Height	Depth		
6-33582S-M	X9D90	4	{ 2-60 4-30 }	8 1/2	12	3 1/2	11 \$18.00

FLUSH MOUNTING

6-33582F-M	X9D90	4	{ 2-60 4-30 }	8 1/2	12	3 1/2	11 18.00
------------	-------	---	------------------	-------	----	-------	----------

Same as above Except with Independent Range Circuits. Lighting circuits only are disconnected when main switch is pulled.

100 Ampere Main Lugs**SURFACE MOUNTING**

Each	S. P. Cir- cuits	Branch Fuses	Size Cabinet, ins.			Wt. Ea. lbs.	▲ Each
			Width	Height	Depth		
6-33583PS-M	X9D90	4	{ 2-60 4-30 }	8 1/2	12	3 1/2	12 \$18.00
6-33783PS-M	X14D85	6	{ 2-60 6-30 }	8 1/2	12	3 1/2	20 27.00
6-33983PS-M	X19D25	8	{ 2-60 8-30 }	8 1/2	12	3 1/2	16 35.00

FLUSH MOUNTING

6-33583PF-M	X9D90	4	{ 2-60 4-30 }	8 1/2	12	3 1/2	12 18.00
6-33783PF-M	X14D85	6	{ 2-60 6-30 }	8 1/2	12	3 1/2	20 27.00
6-33983PF-M	X19D25	8	{ 2-60 8-30 }	8 1/2	12	3 1/2	16 35.00

One in a box

Special Direct Shipment Square D Range and Safety Switches and Circuit Breakers D1C0% less than stock quantity prices. Minimum order 300 lbs. or more. In full carton and case lots. Freight Terms—Full freight allowed on 300 lbs. or more.

SQUARE D ELECTRICAL EQUIPMENT


\$100.00 List or More.....D5C0%
Less than \$100.00 List.....D4C5%

Listed by Underwriters' Laboratories, Inc.

GENERAL PURPOSE SAFETY SWITCHES, TYPE D

Plug Fuse Type

Flat Base



Side operated by sturdy steel lever handle.

Standard construction.

Switch securely fastened to cabinet.

30 Amperes—125 Volts

Size box $7\frac{1}{2} \times 5 \times 4$ inches

(D99211)

Each		Poles	Blade	Fuses	*H.P.R. 120 volt, Single Phase	Wt. Each lbs.	▲ Each
K322M	X3D41★	2	2	2	1½	4	\$0.20
6-K322M	X3D41★	(Case lots 10 only)					


With Solid Neutral

(D97211)

K319M	X2D75★	2	1	1	¾	4	5.00
6-K319M	X2D75★	(Case lots 10 only)					

(D97311)

K320M	X3D58★	3	2	2	1½	5	6.50
6-K320M	X3D58★	(Case lots 10 only)					



Dead front shield over mechanism.

Side operated by steel lever handle.

Standard construction.

30 Amperes—125 Volts

With Solid Neutral

(97311WH)

Each		Size Box, ins.	Poles	Blade	Fuses	Wt. Each lbs.	▲ Each
*K321M	X4D90	$7\frac{1}{2} \times 5\frac{1}{2} \times 3\frac{1}{2}$	3	2	2	5	8.90
*KX321M	X4D90	(Case lots 10 only)					



Blue Label

Front operated toggle lever.

Compact, small boxes with generous wiring space.

Rotary disc switch mechanism.

30 Amperes—Plug Fuse Type

125-250 Volts

(93211)

Each		Size Box, ins.	Pole	Blade	Fuses	*H.P.R. 120 volt, Single Phase	Wt. Each lbs.	▲ Each
K318M	X3D41	$6\frac{1}{2} \times 4\frac{1}{2} \times 2\frac{1}{2}$	2	2	2	1½	3	\$0.20
KK318M	X3D41	(Case lots 10)						

*Has swing out interior for easy wiring.

Items marked ★ not carried in stock. Can only be furnished by shipping direct from factory, F. O. B. Detroit, Mich.

Special Direct Shipment Square D Range and Safety Switches and Circuit Breakers D1C0% less than stock quantity prices. Minimum order 300 lbs. or more. In full carton and case lots. Freight Terms—Full freight allowed on 300 lbs. or more.

*H.P.R. Means Horse Power Rating.

Plug Fuse Type

Raintite Cabinet



Side operated by sturdy steel lever handle

30 Amperes—125 Volts

Size box $9 \times 5\frac{1}{4} \times 4\frac{3}{4}$ inches

Without Conduit Hub

(D99211 R)

Each		Pole	Blades	Fuses	*H.P.R. 120 volts, Single Phase	Wt. Each, lbs.	▲ Each
K323M	X7D04	2	2	2	1½	5	\$12.80
KX323M	X7D04	(Case lots 5 only)					

Cartridge Fuse Type

Flat Base



Side operated by sturdy lever handle.

Standard construction.

Switch securely fastened to cabinet.

Positive make and break.

Single Throw

230 Volts A.C.—125/250 A.C. or D.C.—Three-Wire—Solid Neutral

Two Blades—Two Fuses—Neutral Lugs—Fusible

Each		Size Box, Amp. ins.	*H. P. R. 120 240 volt volt	Single Phase	Three Phase	Each lbs.	▲ Each
6-D97312-M	X8D20	60 $13\frac{3}{8} \times 7\frac{1}{2} \times 6\frac{1}{4}$	3	7	13	14.90	
One in ctn.							

STAR ★ DENOTES BEST SELLER

\$100.00 List or More D5C0%
 Less than \$100.00 List D4C5%

SQUARE D MAIN SERVICE SWITCHES

Listed by Underwriters' Laboratories, Inc.

FOR SINGLE PHASE CIRCUITS
 WITH RANGE AND LIGHTING BRANCH CIRCUITS



Square D fuse-breakers act as switch and fuse carriers. They are non-interchangeable and may be reversed for the "ON" and "OFF" positions which are moulded in bakelite. Test holes are provided so that fuses may be tested without interrupting the service.

The interior is held to the box by only one screw, and is reversible, thus permitting the plug fusible circuits to be placed at the top if desired. The grounded neutrals are reversible and are provided with four 60-ampere and four 30 ampere connectors. Multiple bussing of main and range fuse-breakers, the line-side is equipped with 100-ampere connectors. The interior is not fastened to the box for shipping. Since the interior is usually removed before wiring, this feature reduces installation time.

All switches are of dead-front construction to insure safe operation. The door over the fuses has provisions for sealing. Solderless connectors are furnished throughout (washer head screw type on 30-ampere terminals) for easy wiring, and there are 60-ampere tap-offs after main fuses for water heater circuit or mains extension. The base is made of light weight bakelite, with plug fuse receptacles that will accommodate non-tamperable fuses. All boxes and covers have blue-gray enamel finish.

3 Wire—60 Amperes—Grounded Neutral—125-250 Volts
 Fuses—Main fuses 60-amperes. Branch fuses (see below)

All Circuits Including Range Circuit are Disconnected when
 Main Switch is Pulled

SURFACE MOUNTING

Each	S. P. Cir- uits	Branch Fuses	Size Cabinet, ins.			Wt. Ea., lbs.	▲ Each
			Width	Height	Depth		
6-33582S-M	X8D80	4 {2-60 4-30}	8½	12	3½	11	\$16.00

FLUSH MOUNTING

6-33582F-M	X8D80	4 {2-60 4-30}	8½	12	3½	11	16.00
------------	-------	------------------	----	----	----	----	-------

Same as above except with Independent Range Circuits.
 Lighting circuits only are disconnected when main switch is pulled.

100 Ampere Main Lugs

SURFACE MOUNTING

Each	S. P. Cir- uits	Branch Fuses	Size Cabinet, ins.			Wt. Ea., lbs.	▲ Each
			Width	Height	Depth		
6-33583PS-M	X8D80	4 {2-60 4-30}	8½	12	3½	12	\$16.00
6-33783PS-M	X16D23	6 {2-60 6-30}	8½	12	3½	20	29.50
6-33983PS-M	X18D70	8 {2-60 8-30}	8½	12	3½	16	34.00

FLUSH MOUNTING

6-33583PF-M	X8D80	4 {2-60 4-30}	8½	12	3½	12	16.00
6-33783PF-M	X16D23	6 {2-60 6-30}	8½	12	3½	20	29.50
6-33983PF-M	X18D70	8 {2-60 8-30}	8½	12	3½	16	34.00

One in a box

SQUARE D TYPE QO CIRCUIT BREAKER LOAD CENTERS

Listed by Underwriters' Laboratories, Inc.



Single Pole



Double Pole

Trip Mechanism is of the more efficient thermal and independent magnetic type.

Overloads are controlled by a direct heating bimetal element. This gives inverse time delay for loads greater than rating of the breaker. Needless tripping is eliminated.

Short circuits or dangerous overloads act directly on the partially closed magnetic element which operates the trip mechanism fast enough to prevent heating in either the conductor or bimetal. This construction gives fast, sensitive operation without high resistance coils in series with the load.

Trip Indication is positively identified by the operating handle moving to a center position between the ON and OFF position. This definitely indicates the circuit in trouble—not just another circuit in the OFF position.

120 Volts A.C. Only Single Pole Type

Each			Ampere Rating	▲ Each
K263M	X1D71	(QO115)	15	\$3.10
K312M	X1D71	(QO120)	20	3.10
K314M	X1D71	(QO130)	30	3.10
K317M	X1D71	(QO140)	40	3.10
K324M	X1D71	(QO150)	50	3.10

Packed 10 in a Shelf Carton. Wt. 2½ lbs.

120-240 Volts A.C. Only Double Pole Type

K354M	X3D80	(QO215)	15	6.90
K368M	X3D80	(QO220)	20	6.90
K371M	X3D80	(QO230)	30	6.90
K373M	X3D80	(QO240)	40	6.90
K374M	X3D80	(QO250)	50	6.90

Packed 5 in a Shelf Carton. Wt. 2½ lbs.

Special Direct Shipment Square D Range and Safety Switches and Circuit Breakers D1C0% less than stock quantity prices. Minimum order 300 lbs. or more. In full carton and case lots. Freight Terms—Full freight allowed on 300 lbs. or more.

SQUARE D TYPE QO CIRCUIT BREAKER LOAD CENTERS

APPLICATION

QO circuit breaker load centers are designed for residential, commercial and light industrial application having A.C. lighting, heating, appliance, motors and machine loads. They are intended for circuit protection and switching on 1 phase, 2 or 3 wire, 120/240 volt A.C., and 3 phase, 3 wire, 240 volt A.C. or 3 phase, 4 wire, 120/208 volt A.C. Branches are available in ratings from 15 to 20 ampere single pole, 15 to 70 ampere two pole, and 15 to 50 ampere 3 pole individual trip or common trip types, as well as common trip switched neutral breakers for filling station circuits.

These load centers bear Underwriters' Laboratories approval as panel base assemblies and those complying with the six circuit subdivisions' rule are also approved for service entrance use.



K216M—Surface
K218M—Flush



K224M—Surface
K225M—Flush



QO4S—Surface
QO4F—Flush



QO6AS—Surface
QO6AF—Flush



QO8S—Surface
QO8F—Flush



Order covers
as a separate item

\$100.00 List or More D5C0%
Less than \$100.00 List D4C5%

QO CIRCUIT BREAKER

The QO circuit breaker was originally designed for the more expensive panelboard types of application. Automation technique at a special circuit breaker plant reduced cost so that this quality breaker could be marketed at residential levels.

Ratings—15, 20, 30, 40 and 50 ampere, single pole, rates 120/240 volt A.C., 2 wire. Two single poles may be combined with a handle tie for individual trip, two pole operation.

Two pole common trip breaker occupies the same space as two singles. Ratings are similar, except the availability of a 70 ampere unit.

Three pole common trip breakers are available for 240 volt A.C., 3 phase service. Ratings are 15, 20, 30, 40 and 50 amp.

Compact Size—Reduces space for mounting. Single poles are $1\frac{1}{4}$ " wide while two poles are $1\frac{1}{2}$ " wide and three poles are $2\frac{1}{4}$ " wide; therefore, there is no space penalty for two or three pole operations.

Operating Mechanism—Uses toggle operation of the quick-make, and quick-break type. The latch area (which determines calibration) is not affected by switching. Life tests are far in excess of Underwriters' requirements for "T" rated switches. The toggle handle acts directly against the contact blade, thus assuring positive breaking of the contacts. This is an important safety feature.

General Purpose Type, Consisting of Box, Interior and Cover.
Order Breaker Separately. (Section 18—Page 30)

Each		Maximum Number of Poles	Main Ratings Amperes	Type (QO2S)	Box Mounting	Qty. in a Case	Wt. case lbs.	▲Each
K216M	X1D82	2	30	QO2	Surface	10	25	\$3.30
KK216M	X1D82—(Case lots 10)							
				(QO2F)				
K218M	X2D20	2	30	QO2	Flush	10	25	4.00
KK218M	X2D20—(Case lots 10)							
				(QO2AS)				
K224M	X3D03	2	70	QO2A	Surface	10	35	5.50
KK224M	X3D03—(Case lots 10)							
				(QO2AF)				
K225M	X3D03	2	70	QO2A	Flush	10	35	5.50
KK225M	X3D03—(Case lots 10)							
6-QO4S-M	X3D19	4	70	QO4	Surface	1	6	5.80
6-QO4F-M	X3D19	4	70	QO4	Flush	1	6	5.80
6-QO6AS-M	X4D79	6	70	QO6A	Surface	1	6	8.70
6-QO6AF-M	X4D79	6	70	QO6A	Flush	1	6	8.70
6-QO8S-M	X6D38	8	100	QO8	Surface	1	10	11.00
6-QO8F-M	X6D38	8	100	QO8	Type	1	10	11.00

General Purpose Type, Consisting of Box and Interior (Less Cover).
Order Covers and Breakers Separately. (Section 18—Page 30)

6-QO12-M	X7D92	12	100	QO12	(See below)	1	9	14.40
----------	-------	----	-----	------	-------------	---	---	-------

COVERS FOR TYPE QO12 BREAKER

				(QOC12S)				
K326M	X1D65	Surface Type Cover			5	20	3.00	
KK326M	X1D65—(Case lots 5)							
				(QOC12F)				
K327M	X1D65	Flush Type Cover			5	20	3.00	
KK327M	X1D65—(Case lots 5)							

Special Direct Shipment Square D Range and Safety Switches and Circuit Breakers D1C0% less than stock quantity prices. Minimum order 300 lbs. or more. In full carton and case lots. Freight Terms—Full freight allowed on 300 lbs. or more.

COMPARATIVE NUMBER OF SWITCHES

Made by Prominent Switch Manufacturers

Federal	Square D	Trumbull	American	Cutler-Hammer	Bull Dog
264	33582S	224-4	10322-R41	4334H115	551204
266	33782S	224-6	10322-R61	4334H23	551206
268C	33983PS	229-8	10322-RL8	434H128S	
464	33582F	224-4F	10322-R41F	4334H115F	551204
466	33782F	224-6F	10322-R61F	4334H23F	551206
468C	33983PF	229-8F	10322-RL8F	434H128F	
ER264	33582R0HC3	224-4RE		4334H22	
12610S	31023S				
12610F	31023F				
12616S	31623S			4336H6	
12616F	31623F			4336H6F	
110	39113S	4607		4336H1	
310	39113F	4609		4336H1F	
DR160	39112R0HC2	2907WPD	1032210D-1	4330H31	
ER160	39112R0HC2	2907WPE	1032210D-1	4330H31	
GR3122	D97313R	23233WP			
3622	D97312	TC23322		4143H202	JN322
3632	D97412	TC23422		4143H302	JF322
03115N	D97211	23111		4141H241	336211S
3322	D98251	TC24211			RF221
0322	D99211	24211		4141H201	334211S
0322SN	D97311	25311		4141H341	336311S
DR0322SN	D97311R	23311WP		4141H3341	
3332SN	97451	TC23421		4143H301	RN321

FUSE PLUGS

BUSS

Listed by Underwriter's Laboratories, Inc.



You can instantly see which fuse is blown, because every Buss fuse has an all-white interior.

The blowing point is up near the window. The entire strip is visible. Clear window.

Porcelain Base—125 Volts

Each	100 or more	Case lots (500)	Ampere	Each
K530M	D0C5 ^{1/16}	D0C5 (W10)	10	\$0.08
K531M	D0C5 ^{1/16} ★	D0C5★ (W15)	15	.08
K532M	D0C5 ^{1/16} ★	D0C5★ (W20)	20	.08
K533M	D0C5 ^{1/16} ★	D0C5★ (W25)	25	.08
K534M	D0C5 ^{1/16} ★	D0C5★ (W30)	30	.08

Five in box, one hundred in ctn., five hundred in case. Wt. case 35 lbs.

Sold Only in Full Boxes

BUSS FUSETRONS

Stop Needless Blowing of Plug Fuses

Replace Old Style plug Fuses for Circuit Protection; don't Blow when Motors Start on Washing Machines, Refrigerators and Such Appliances; they have a Long-Time Lag Because they are a Fuse to which is Added a Thermal Cutout.

Abolish Unsafe Practice of Using Over-Size Fuses to Stop Needless Blowing. Give all the Protection Fuses Do—Hold Like a Large Fuse when Safety Permits—yet Open Like a Small Fuse when Safety Demands.

Large Clear Window Makes it Easy to Instantly Locate a Blown Fusetron.

There is no Installation Cost—Just Take Out Fuses and Screw in Fusetrans.

For Circuit Protection on Voltages Up to 125.

Each	Less than 100	Lots 100 or more	Amp. Each
K520M	D1C4 ^{1/5}	D1C2 ^{3/4} (T5)	5 \$0.21
K522M	D1C4 ^{1/5}	D1C2 ^{3/4} (T6 ^{1/4})	6.25 .21
K523M	D1C4 ^{1/5}	D1C2 ^{3/4} (T8)	8 .21
K524M	D1C4 ^{1/5}	D1C2 ^{3/4} (T10)	10 .21
K525M	D0C7 ^{3/5}	D0C6 ^{9/10} (T15)	15 .12
K526M	D0C7 ^{3/5}	D0C6 ^{9/10} (T20)	20 .12
K527M	D0C7 ^{3/5}	D0C6 ^{9/10} (T25)	25 .12
K528M	D0C7 ^{3/5}	D0C6 ^{9/10} (T30)	30 .12

K520M, K522M, K523M, K524M packed four in a box, 100 fuses in a shelf carton, balance four in a box, forty fuses in a display package.

Wt. per 100, 6^{3/4} lbs.

Sold Only in Full Boxes

NOTE—Can Assort All Buss Fuse Plugs, Fusetrans, Fustats, Adapters, Cartridge Fuses and Renewable Links to Obtain Quantity Price.

STAR ★ DENOTES BEST SELLER

BUSS FUSTATS



Cut Shows Fustat



Cut Shows Adapter

Operates Like a Fusetron, But Has a Non-Tamperable Base.

Resists Tampering and Over-Fusing. Stops Use of Pennies or Slugs; Practically Impossible to Bridge with Tinfoil, Wire or any other Material. Prevents Over-Fusing. A 20, 25 or 30 Ampere Size will not Fit in a 15 Ampere Receptacle or Adapter; Similar Limitations Apply to all other Sizes.

But That's Not Enough. A Non-Tamperable Fuse that would Blow on Starting Currents would be an Impractical Device—a Terrible Nuisance—so the Fustat Wipes Out any Excuse for Tampering Because IT STOPS NEEDLESS BLOWING. It won't Blow when Motors Start on Washing Machines, Refrigerators or other Appliances; it has a Thermal Cutout Combined with a Fuse.

Makes Safe Protection Remain Safe; Stops Loss of Money on Needless "Blown-fuse" Service Calls; Permits Adding More Appliances to Present Circuits.

Fit All Edison Base Fuse Holders by Use of Adapter which Locks in Place.

For Circuit Protection on Voltages up to 125.

Adapters Not Included with Fustats; Must be Ordered Separately.

FUSTATS ONLY

Each	Less than 100	Lots 100 or more	Amp. Each
K466M	D1C4 ^{1/5}	D1C2 ^{3/4} (S5)	5 \$0.21
K467M	D1C4 ^{1/5}	D1C2 ^{3/4} (S6 ^{1/4})	6.25 .21
K468M	D1C4 ^{1/5}	D1C2 ^{3/4} (S8)	8 .21
K469M	D1C4 ^{1/5}	D1C2 ^{3/4} (S10)	10 .21
K470M	D1C1 ^{1/10} ★	D1C0★ (S15)	15 .17
K471M	D1C1 ^{1/10} ★	D1C0★ (S20)	20 .17
K472M	D1C1 ^{1/10}	D1C0 (S25)	25 .17
K473M	D1C1 ^{1/10}	D1C0 (S30)	30 .17

Four in Box, 100 in ctn. Wt. ctn. 5^{1/4} lbs.

Sold Only in Full Boxes

ADAPTERS

Each	Less than 100	Lots 100 or more	For use with Fustat No.	Amp. Each
K460M	D0C8 ^{9/10}	D0C8 (SA6 ^{1/4})	K467M-S6 ^{1/4}	\$0.13
K463M	D0C8 ^{9/10}	D0C8 (SA15)	K470M-S15	.13
K464M	D0C8 ^{9/10}	D0C8 (SA20)	K471M-S20	.13
K465M	D0C8 ^{9/10}	D0C8 (SA30)	K472M-S25 K473M-S30	.13

Four in box, 100 in ctn. Wt. ctn. 3 lbs.

Sold Only in Full Boxes

GLASS FUSE PLUGS

Listed by Underwriters' Laboratories, Inc.

EAGLE



Glass Top Guarantees Visibility

Perfect visibility of the fuse link and the tell-tale disk are the results.

And It's Safe

The glass is a perfect insulator and forms a top that is positively shock proof.

Each		Ampere	Box
K535M (RC515)	D0C5 1/4 ★	15	\$0.39
KK535M (RC515)	D0C4 1/4 ★	(Case lots 500)	
K536M (RC520)	D0C5 1/4 ★	20	.39
KK536M (RC520)	D0C4 1/4 ★	(Case lots 500)	
K537M (RC525)	D0C5 1/4 ★	25	.39
KK537M (RC525)	D0C4 1/4 ★	(Case lots 500)	
K538M (RC530)	D0C5 1/4 ★	30	.39
KK538M (RC530)	D0C4 1/4 ★	(Case lots 500)	
Lots of 100 or more	D0C4 1/4 ★		

Five in a show window box.
100 fuses in master display ctn.
Wt. ctn. 7 1/2 lbs.

Sold Only in Full Boxes

SUPERIOR



A high grade unapproved fuse plug. Superior fuses are made under the same rigid test conditions as Eagle O-K Underwriters approved fuse plugs. Soldered connections.

Each	(1013)	Ampere	Each
K542M		25	.08
KK542M	(Case lots 500)		

All above Nos. D0C4 1/4
Lots of 100 or more D0C4 1/4

Five in box, 100 in ctn. Wt. ctn. 6 lbs.

Can Assort for Quantity

Sold Only in Full Boxes

BOX COVER UNITS

Listed by Underwriters' Laboratories, Inc.

BUSS FUSTAT

Fustat on a box cover protects the motor against burnout and the user against costly repair bills and delays.

On normal installations, a Fustat of motor-running protection size, mounted anywhere in the circuit to handle ONLY the motor current, will protect a motor against burnout. Nothing else is needed.

BUSS Fustat box-cover units offer the simplest possible way to install a Fustat in the motor circuit—either a Fustat alone—or a Fustat in combination with a switch or plug-in receptacle.

Made with Edison base fuseholders so that any Unit can be made to take the proper size Fustat simply by inserting the right size Adapter.

With Toggle Switch for Use on AC motors, Only 1/2 H.P. and Smaller—125 Volts or Less



Fustat and switch units provide both protection for the motor and a switch for operating the device—they save time and money.

Install in outlet or switch box and screw in proper size Fustat and adapter.

To Be Mounted on a Handy Box
Less Fustat and Adapter

Each		Each
K551M	D7C6	\$1.15
20 or more	D6C9	

One in ctn. Wt. ctn. 1 1/2 lb.

SIZE FUSTAT TO USE FOR MOTOR PROTECTION

Horsepower rating of a motor gives no accurate guide as to the size Fustat to use as the ampere rating of AC motors of the same horsepower varies a great deal.

To obtain highest degree of protection, on normal installations, size of Fustat should be the same as the ampere rating of the motor or slightly larger—as indicated in column of table below headed "Normal Service".

On motors that start under load such as on large fans, compressors or the like, the Code permits the use of any size up to maximum shown in the table.

In abnormal cases such as where Fustat is located in a place where a high temperature prevails—or where motor is started frequently or reverse quickly—or where motor is direct connected or chain driven to a machine that cannot be brought up to speed quickly—a Fustat larger than recommended above may be used. In this case the Fustat provides only locked rotor and short-circuit protection.

AMPERES of motor or device	Ordinary service	Heavy service	Ampere rating of Fustat	
			MAXIMUM Motor*	All Other Motors
2.35 to 2.43	2 1/2	2 5/8	3 1/2	2 5/8
2.44 to 2.56	2 1/2	2 5/8	3 1/2	3 1/2
2.57 to 2.60	2 1/2	2 5/8	3 1/2	3 1/2
2.61 to 2.78	2 5/8	3 1/2	3 1/2	3 1/2
2.79 to 2.85	2 5/8	3 1/2	3 1/2	3 1/2
2.86 to 2.91	2 5/8	3 1/2	4	3 1/2
2.92 to 3.04	3 1/2	3 1/2	4	3 1/2
3.05 to 3.21	3 1/2	3 1/2	4	4
3.22 to 3.33	3 1/2	3 1/2	4 1/2	4
3.34 to 3.47	3 1/2	4	4 1/2	4
3.48 to 3.60	3 1/2	4	4 1/2	4 1/2
3.61 to 3.64	3 1/2	4	5	4 1/2
3.65 to 3.91	4	4 1/2	5	4 1/2
3.92 to 4.00	4	4 1/2	5	5
4.01 to 4.16	4	4 1/2	5 5/8	5
4.17 to 4.34	4 1/2	5	5 5/8	5
4.35 to 4.48	4 1/2	5	5 5/8	5 5/8
4.49 to 4.68	4 1/2	5	6 1/4	5 5/8
4.69 to 4.86	5	5 5/8	6 1/4	5 5/8
4.87 to 5.00	5	5 5/8	6 1/4	6 1/4
5.01 to 5.20	5	5 5/8	7	6 1/4
5.21 to 5.43	5 5/8	6 1/4	7	6 1/4
5.44 to 5.71	5 5/8	6 1/4	7	7
5.72 to 5.82	5 5/8	6 1/4	8	7
5.83 to 6.08	6 1/4	7	8	7
6.09 to 6.42	6 1/4	7	8	8
6.43 to 6.50	6 1/4	7	9	8
6.51 to 6.95	7	8	9	8
6.96 to 7.20	7	8	9	9
7.21 to 7.28	7	8	10	9
7.29 to 7.82	8	9	10	9
7.83 to 8.32	8	9	10	10
8.33 to 8.57	9	10	10	10
8.58 to 8.69	9	10	12	10
8.70 to 9.36	9	10	12	12
9.37 to 10.4	10	12	12	12
10.5 to 10.7	12	12	12	12
10.8 to 12.4	12	14	14	14
12.5 to 13.0	14	14	14	14

*This applies to motors marked to have a temperature rise not over 40°C. All other motors take maximum shown in fourth column (4322-a-1)

If two ampere ratings are shown on motor, take sure for what voltage motor is connected.

STAR ★ DENOTES BEST SELLER

RENEWABLE FUSES

Listed by Underwriters' Laboratories, Inc.

BUSS—Super-Lag



Prevent money wasting shutdowns. Keep circuits in operation. Keep machines running and workers on the job. Patent fuse-case design and super-lag development prevent them from blowing needlessly.

250 Volts—Ferrule End Type
(REN)

Each	Less than \$15.00 Net	Larger Qty.	Amp.	Wt. Ctn., lbs.	Each
K478M	D4C0	D3C3½	30	1½	\$0.55/10
K481M	D8C0	D6C7	60	1½	1.11

Ten in ctn.

250 Volts—Knife Blade Type
(REN)

Each	Less than \$15.00 Net	Larger Qty.	Amp.	Wt. Ctn., lbs.	Each
K482M	X1D80	X1D50	100	2½	\$2.49

Five in ctn.

ONE-TIME CARTRIDGE FUSES

Listed by Underwriters' Laboratories, Inc.

EAGLE

Ferrule End Type, Non-Indicating
Hydro Approved—250 Volts

Per Box	(655)	Ampere	Per Box
K499M	D6C0	15	\$0.80
K502M	D6C0★	30	.80
Ten in box. Wt. box ¾ lb.			
K503M	X1D20	35	1.80
K504M	X1D20	40	1.80
K507M	X1D20★	60	1.80

Ten in box. Wt. box 1 lb.

Sold Only in Full Boxes

ONE-TIME CARTRIDGE FUSES

Listed by Underwriters' Laboratories, Inc.

BUSS



Buss one time cartridge fuses are "listed as standard" by the Underwriters' Laboratories and carry the label "Und. Lab. Inspected".

Ferrule End Type

Non-Indicating

250 Volts

(NON)

Per Box	Less than \$15.00 Net	Larger Qty.	Amp.	Per Box
K485M	D8C0	D6C6	10	\$1.10
K487M	D8C0	D6C6	15	1.10
K488M	D8C0	D6C6	20	1.10
K489M	D8C0	D6C6	25	1.10
K490M	D8C0★	D6C6★	30	1.10

Ten in box. Wt. box ¾ lb.

K491M	X1D60	X1D33	35	2.20
K492M	X1D60	X1D33	40	2.20
K493M	X1D60	X1D33	45	2.20
K494M	X1D60	X1D33	50	2.20
K495M	X1D60★	X1D33★	60	2.20

Ten in box. Wt. box 1 lb.

Sold Only in Full Boxes



Knife Blade Type

Non-Indicating

250 Volts

(NON)

Per Box	Less than \$15.00 Net	Larger Qty.	Amp.	Per Box
K496M	X3D50	X2D92	100	\$4.90

Five in box. Wt. box 1½ lbs.

STAR ★ DENOTES BEST SELLER

RENEWABLE LINKS

Listed by Underwriters' Laboratories, Inc.



250 Volts

The super-lag construction of Buss renewal links keeps them from blowing on harmless overloads that would blow ordinary fuses.

Links are made in one piece in all sizes. This makes renewal handy and prevents poor contact developing while fuse is in use.

Interchangeable with all makes of standard fuse links.

(LKN)

Per Box	Less than \$15.00 Net	Larger Qty.	Amp.	Wt. Box, lbs.	Per Box
K514M	D4C0	D3C3½	30	¼	\$0.56
K517M	D8C0	D6C7	60	1	1.12
K518M	D9C0	D7C5	100	1	1.25

30 and 60 Amp. Incl.—20 in a Box
100 Amp.—10 in a Box

Sold Only in Full Boxes

NOTE—Can Assort All Buss Fuse Plugs, Fusetrans, Fustats, Adapters, Cartridge Fuses and Renewable Links to Obtain Quantity Prices.

FRICTION TAPE



DUTCH BRAND

For electrical, automotive, industrial and general uses. Dutch Brand friction tape is the finest, the best quality and the easiest to sell.

Contains 20 Rolls
Size $\frac{3}{4}$ inch x 13 feet long
Cellophane Wrapped
(52)

Per Display Δ Per Roll
K601M X2D50 \$0.20

Lots of 5 displays or more X2D30
One display in box. Wt. box 1 lb.

Size $\frac{3}{4}$ inch x 30 feet long
Cellophane Wrapped

Per Roll
K606M D1C9 \$0.30
Lots 100 rolls or more D1C8

200 rolls in a case. Wt. 50 lbs.

Size $\frac{3}{4}$ inch x 60 feet long
Cellophane Wrapped

Per Roll
K608M D3C7 \$0.55
KK608M D3C4—(Case lots 100 rolls)

100 rolls in a case. Wt. 50 lbs.

PLASTIC TAPE

Dutch Brand

Convenient sized rolls for many electrical, radio, television and household uses. Stands up under severest conditions. Resists action of water, oils, acids, etc. Thin, yet has high dielectric strength. Stretches and conforms readily to irregular surfaces.



Contains 24 rolls, $\frac{1}{2}$ inch by 150 in. long.
(125)

Per Display Δ Each
K686M X5D00 \$0.35
One display in box. Wt. box $1\frac{1}{4}$ lbs.

TOOL KIT SIZE ROLLS



Contains 12 rolls $\frac{3}{4}$ in. by 20 ft. long.
(126)

Per Display Δ Each
K687M X6D00 \$0.75

Lots of 3 displays or more X5D28
One display in box. Wt. box 1 lb.

RUBBER TAPE

Dutch Brand



The perfect splicing compound. Fuses instantly without heat. Resists up to 18,000 volts through a single thickness. Pure natural rubber assures elasticity and durability. No free sulphur or corrosive chemicals.

 $\frac{3}{4}$ -inch Wide

(4)

Per Roll	Size Roll	Length ft.	Per Roll
K640M	D2C3	No. 4	10 .35

Lots of 100 rolls or more D2C2

8 rolls in display. Wt. display $1\frac{1}{4}$ lbs.

(8)

K641M	D4C4	No. 8	22 .65
-------	------	-------	--------

Lots of 100 rolls or more D4C1

6 rolls in display. Wt. display $1\frac{1}{4}$ lbs.

ELECTRICAL TAPE

SCOTCH BRAND No. 33 PLASTIC TAPE

Black vinyl plastic, super thin. Resists water, weather, oils, acids and alkalis.



**1/2x150 Inch and 3/4x240 Inch Roll
Display Assortment**

Displays both popular sizes, 39 cts. and 75 cts. It up-grades the dealer's sales, boosts profits. Takes only 1/2 square foot of space. 8 inches wide, 6 inches deep and 13 inches high and the Display Rack is FREE.

Consists of:

	Retail
24—1/2 x 150 inch rolls	\$9.36
12—3/4 x 240 inch rolls	9.00
1—wire display rack	no charge
Total Retail Value	18.36
Dealer Profit (33 1/3%)	6.12

Per Display	■ Per Display
6-ET-M	X12D24
	\$18.36

Lots of 2 displays
or more.....X11D57

One display in ctn.

Wt. per display 3 1/2 lbs.



3/4x240 Inch Roll Display

In a display carton. Each roll individually wrapped in cellophane.

Per Display	(198)	■ Per Display
K709M	X6D00	\$9.00
Lots of 6 Displays	X5D67	
Lots of 24 Displays	X5D40	

Twelve rolls in display, twelve displays in ctn.
Wt. ctn. 13 1/2 lbs.

3/4 inch x 20-Foot Rolls

Per Roll	(33)	■ Per Roll
K696M	D5C5★	\$0.75
Lots of 12	D5C0★	
Lots of 48	D4C4★	
Twelve rolls in tube. 144 rolls in standard pkg		
Wt. pkg. 14 lbs.		



1/2x150 Inch Roll Display

Each roll sealed in an acetate "blister" and mounted on individual card.

(197)

Per Display	■ Each
K704M	X3D12★
Lots of 6 displays	X2D95★
Lots of 24 displays	X2D81★

Twelve rolls in display, twelve displays in ctn.
Wt. ctn. 10 1/2 lbs.



1/2x150 Inch Roll Display

Each roll individually wrapped in cellophane.

(196)

Per Display	■ Each
K698M	X3D12
	\$0.39
Lots of 6 to 23	X2D95
Lots of 24 or more	X2D81

Twelve rolls in display. Twelve displays in ctn. Wt. ctn. 8 1/2 lbs.

Can assort K698M, K704M and K709M to get quantity prices.

STAR ★ DENOTES BEST SELLER

FRICTION TAPE

SI BRAND

Manufactured by a superior method of friction, calendering a highly adhesive "not sticky" compound through the fabric, not spread on the top of the sheeting as in many tapes. Superior insulating tapes are slit before being rolled, therefore cannot ravel. Superior friction tapes contain no sulphur or harmful solvents. The wrapping seals the tape against impurities and prevents oxidation of the live rubber ingredients. Superior insulating tapes in "tuck-end" cartons which may be opened and closed without damage. The carton protects the tape for the life of the roll.



Black, 3/4-inch Wide

Minimum length per Roll, 60 feet.

Per Roll	Formerly Called	Per Roll
K708M D3C4★ (118T)	8 oz.	\$0.60
Per Case		
KK708M X32D00★—(Case lots 100)		

One Roll in a Carton
100 Rolls in a Shipping Case

Approximate Weight per Case, 50 lbs.

Minimum length per Roll, 30 feet.

Per Roll	Formerly Called	Per Roll
K707M D2C2★ (114T)	4 oz.	\$0.33
Per Case		
KK707M X40D00★—(Case lots 200)		

One roll in a carton
200 Rolls in a Shipping Case

Approximate Weight per Case, 47 lbs.

Packed in Counter Display Cartons
Black, 3/4-inch Wide

Minimum Length per Roll, 12 1/2 feet.

Per Ctn.	Formerly Called	Per Ctn.
K706M X2D05 (112T)	2 oz.	\$3.20
16 rolls in ctn. 30 ctns. in shipping case		

KK706M X54D00—(Case lots 30)

Minimum length per roll, 5 feet.

Per Ctn.	Formerly Called	Per Ctn.
K705M X2D55 (111T)	1 oz.	\$3.52
KK705M X65D00—(Case lots 28)		
32 rolls in ctn. 28 ctns. in shipping case		

Approx. wt. case 50 lbs.

Sold Only in Full Cartons

FRICTION TAPE DISPLAYS

SI BRAND



A conspicuous, sturdy and attractive merchandiser with friction tape for electrical, automobile and home use. Has all sizes visible for easy selection and increases impulse sales. Takes little counter room and requires no extra racks or shelf space. Height 20 inches. Width 14 inches. Depth 7 inches.

Consists of:

Quantity	No.	Feet in Box	Retail Per Box
24	K705M	5	\$0.11
24	K706M	12 1/2	.20
12	K707M	30	.33
12	K708M	60	.60

Total \$18.60

Display and 72 Boxes Black Tape—3/4 inch Wide

Per Display	Per Display
K712M X11D00 (72)	\$18.60
Per Case	
KK712M X43D00—(Case lots 4)	

One display in ctn. Four ctns. in case. Wt. case 52 lbs.

Special Direct Shipment SI and Shapleigh Brand Friction Tape and Splicing Compound D1C2 1/2 less than stock case lot price. Minimum order 100 lbs. or more in full case lots. Freight Terms—Full freight allowed on 100 lbs. or more.

STAR ★ DENOTES BEST SELLER

PLASTIC ELECTRICAL TAPE

SI BRAND

UL Approved

Withstands exposure to all types of weather. Remains workable at all ordinary temperatures. Tears readily. Makes neat splices easily. Can be used to replace combination of rubber tape and friction tape.

For electrical repairs, auto repairs, garden hose, tool handles and many other items. Resists water, weather, corrosive fumes and oil.

In 60 foot rolls,
3/4 inch wide

Each roll in a metal can

Per Roll	Per Roll
K697M X1D20★ (60)	\$1.80

Per Case
KK697M X99D00★—(Case lots 90 rolls)
Ten rolls in ctn. 90 rolls in case
Wt. case 27 lbs.



In 20 foot rolls, 3/4 inch wide

Each roll cellophane wrapped and boxed

Per Roll	Per Roll
K695M D5C0★ (20)	\$0.75

Per Case
KK695M X81D00★—(Case lots 180 rolls)
Ten rolls in ctn. 180 rolls in case
Wt. case 16 1/2 lbs.



Attractive counter display, smart and compact. Every roll has a label on each side, forming a reel for easy unwinding.
Contains 24 rolls—1/2 x 120 ins.

Per Display	Per Roll
K713M X3D96 (10)	\$0.25

Per Case
KK713M X43D20—(Case lots 12 displays)

Twelve displays in case. Wt. case 12 lbs.

Sold Only in Full Displays

FRICTION TAPE

SHAPLEIGH'S



A High Grade Friction Tape; Made of Closely Woven Fabric Thoroughly Calendered with a Highly Adhesive Compound; Each Roll is Wrapped in Cellophane for Ideal Protection.

Black, 3/4-inch Wide

Minimum length per roll, 60 feet.

Per Ctn.		Per Ctn.
K703M	X2D35★ (ST30)	\$3.55
Lots of 10 ctns.	X2D15★	3.25
Per Case		
KK703M	X45D00★—(Case lots 24)	

Six rolls in ctn. 24 ctns. in shipping case
Approx. wt. case 46 lbs.

Minimum length per roll, 45 feet.

Per Ctn.		Per Ctn.
K702M	X1D70★ (ST20)	\$2.55
Lots of 10 ctns.	X1D60★	2.40
Per Case		
KK702M	X34D50★—(Case lots 24)	

Six rolls in ctn. 24 ctns. in shipping case
Approx. wt. case 46 lbs.

Minimum length per roll, 21 feet.

Per Ctn.		Per Ctn.
K700M	X1D95★ (ST10)	\$2.95
Lots of 10 ctns.	X1D70★	2.55
Per Case		
KK700M	X37D50★—(Case lots 24)	

Twelve rolls in ctn. 24 ctns. in shipping case
Approx. wt. case 46 lbs.

Minimum length per roll, 10 feet.

Per Ctn.		Per Ctn.
K699M	X2D40 (ST5)	\$3.60
Lots of 10 ctns.	X2D25	3.40
Per Case		
KK699M	X43D00—(Case lots 22)	

Twenty-four rolls in ctn. 22 ctns. in shipping case
Approx. wt. case 46 lbs.

Sold Only in Full Cartons

SPLICING COMPOUND

SI BRAND



SI Splicing Compound is a High Grade Rubber Compound which Instantly Fuses into a Permanent Waterproof Joint without Heat; Dielectric Strength, 10,000 Volts per Layer.

Black, 3/4-inch Wide

Minimum length per roll, 22 feet.

Per Roll		Formerly Called	Per Roll
K711M	D4C2★ (918)	8 oz.	\$0.65
Per Case			
KK711M	X40D00★—(Case lots 100)		

One roll in ctn. 100 rolls in shipping case
Approx. wt. case 50 lbs.

Minimum length per roll, 11 feet.

Per Roll		Formerly Called	Per Roll
K710M	D2C2 1/2★ (914)	4 oz.	\$0.30
Per Case			
KK710M	X42D00★—(Case lots 200)		

One roll in ctn. 200 rolls in shipping case
Approx. wt. case 47 lbs.

SHAPLEIGH'S



A Good Quality Rubber Compound which Instantly Fuses into a Permanent Waterproof Joint without Heat.

Black, 3/4-inch Wide

Minimum length per roll, 5 feet.

Wt. per Ctn. 3 lbs.

Per Ctn.		Per Ctn.
K701M	X3D00 (ST10R)	\$4.50
Lots of 10 ctns.	X2D80	
Per Case		
KK701M	X56D00—(Case lots 22)	

Twenty-four rolls in ctn. 22 ctns. in shipping case
Approx. wt. case 46 lbs.

Sold Only in Full Cartons

Can Assort Shapleigh's Friction Tape and Splicing Compound to Obtain Quantity Prices

Special Direct Shipment SI and Shapleigh Brand Friction Tape and Splicing Compound D1C2 1/2 less than stock case lot price. Minimum order 100 lbs. or more in full case lots. Freight Terms—Full freight allowed on 100 lbs. or more.

STAR ★ DENOTES BEST SELLER

FRICTION TAPE

KEEN KUTTER



Individually carded rolls with illustrations that suggest many extra uses. Sells itself.

Black Color

Per Roll	Width, in.	Per Roll
Minimum Length Per Roll 60 Feet		
K575MK (L8) D3C6½	¾	\$0.49
Lots of 12 D3C4		
KK575MK (L8) D3C2—(Case lots 96)		
Twelve in box, 96 in ctn. Wt. ctn. 45 lbs.		
Minimum Length Per Roll 30 Feet		
K564MK (L4) D1C9½	¾	.20
Lots of 12 D1C8		
KK564MK (L4) D1C7—(Case lots 216)		
Twelve in box, 216 in ctn. Wt. ctn. 51 lbs.		
Minimum Length Per Roll 13 Feet		
K563MK (L2) D1C2	¾	.17
Lots of 12 D1C1		
KK563MK (L2) D1C0—(Case lots 408)		
Twelve in box, 408 in ctn. Wt. ctn. 52 lbs.		

SI BRAND

Manufactured by a superior method of friction, calendaring a highly adhesive "not sticky" compound through the fabric, not spread on the top of the sheeting as in many tapes. Superior insulating tapes are slit before being rolled, therefore cannot unravel. Superior friction tapes contain no sulphur or harmful solvents. The wrapping seals the tape against impurities and prevents oxidation of the live rubber ingredients. Superior insulating tapes in "tuck-end" cartons which may be opened and closed without damage. The clirton protects the tape for the life of the roll.



Packed in Counter Display Cartons
Black, ¾-inch Wide

Minimum length per Roll, 12½ feet.

Per Ctn.	Formerly Called	Per Ctn.
Minimum Length per Roll, 12½ feet.		
K706M (112T) X2D05	2 oz.	\$3.20
16 rolls in ctn. 30 ctns. in shipping case		
KK706M (112T) X54D00—(Case lots 30)		
Minimum length per roll, 5 feet.		
Per Ctn.	Formerly Called	Per Ctn.
K705M (111T) X2D55	1 oz.	\$3.52
KK705M (111T) X65D00—(Case lots 28)		
32 rolls in ctn. 28 ctns. in shipping case		
Approx. wt. case 50 lbs.		
Sold Only in Full Cartons		

DUTCH BRAND



For electrical, automotive, industrial and general uses. Dutch Brand friction tape is the finest, the best quality and the easiest to sell.

Contains 20 Rolls
Size ¾ inch x 13 feet long
Cellophane Wrapped

Per Display	(52)	X2D50	▲ Per Roll
K601M		X2D30	\$0.20
Lots of 5 displays or more			
One display in box. Wt. box 1 lb.			
Size ¾ inch x 30 feet long			
Cellophane Wrapped			
Per Roll	(52)	D1C9	\$0.30
K606M		D1C8	
Lots 100 rolls or more			
200 rolls in a case. Wt. 50 lbs.			
Size ¾ inch x 60 feet long			
Cellophane Wrapped			
Per Roll	(52)	D3C7	\$0.55
K608M		(52)	D3C4—(Case lots 100 rolls)
KK608M			100 rolls in a case. Wt. 50 lbs.



Black, ¾-inch Wide

Minimum length per Roll, 60 feet.

Per Roll	Formerly Called	Per Roll
K708M (118T) D3C4★	8 oz.	\$0.60
Per Case		
KK708M (118T) X32D00★—(Case lots 100)		
One Roll in a Carton		
100 Rolls in a Shipping Case		
Approximate Weight per Case, 50 lbs.		

Direct Shipment

RUBBER TAPE

KEEN KUTTER



Individually carded rolls with illustrations that suggest many extra uses. Sells itself.

Black Color

Per Roll	Width, in.	Per Roll
Minimum Length Per Roll 22 Feet		
K581MK (L8R) D4C3½	¾	\$0.50
Lots of 12 D4C0½		
KK581MK (L8R) D3C8—(Case lots 96)		
Twelve in box, 96 in ctn. Wt. ctn. 44 lbs.		
Minimum Length Per Roll 11 Feet		
K576MK (L4R) D2C3	¾	.33
Lots of 12 D2C1½		
KK576MK (L4R) D2C0—(Case lots 216)		
Twelve in box, 216 in ctn. Wt. ctn. 51 lbs.		

DUTCH BRAND



The perfect splicing compound. Fuses instantly without heat. Resists up to 18,000 volts through a single thickness. Pure natural rubber assures elasticity and durability. No free sulphur or corrosive chemicals.

¾-inch Wide

Per Roll	Size Roll	Length ft.	Per Roll ▲
K640M (4) D2C3	No. 4	10	\$0.35
Lots of 100 rolls or more			
D2C2			
8 rolls in display. Wt. display 1½ lbs.			
K641M (8) D4C4	No. 8	22	.65
Lots of 100 rolls or more			
D4C1			
6 rolls in display. Wt. display 1½ lbs.			

Keen Kutter and SI Brand tapes may be ordered direct from factory, at D1C2½ less than case lot prices, on minimum order of 100 lbs. or more in full case lots. F. O. B. St. Louis, Mo. full freight allowed on 100 lbs. or more.

STAR ★ DENOTES BEST SELLER

PLASTIC TAPE

KEEN  KUTTER

Individually carded rolls with illustrations that suggest many extra uses. Sells itself.

Black Color

Per Roll Width, Per Roll
Minimum Length Per Roll 60 Feet
K588MK (L60) X1D26 3/4 \$1.70

Lots of 12 X1D17
KK588MK (L60) X1D10—(Case lots 96)
Twelve in box, 96 in ctn. Wt. ctn. 25 lbs.

Minimum Length Per Roll 20 Feet
K587MK (L20) D5C41/2 3/4 .79

Lots of 12 D5C1
KK587MK (L20) D4C8—(Case lots 216)
Twelve in box, 216 in ctn. Wt. ctn. 22 lbs.

Minimum Length Per Roll 10 Feet
K582MK (L10) D1C8 1/2 .27

Lots of 18 D1C7
KK582MK (L10) D1C6—(Case lots 288)
18 in box, 468 in ctn. Wt. ctn. 15 lbs.

SCOTCH BRAND No. 33.

Black vinyl plastic, super thin. Resists water, weather, oils, acids and alkalis.



1/2 x 150 Inch and
3/4 x 240 Inch Roll.

Display Assortment

Displays both popular sizes, 39 cts. and 75 cts. It up-grades the dealer's sales, boosts profits. Takes only 1/2 square foot of space, 8 inches wide, 6 inches deep and 13 inches high and the Display Rack is FREE.

Consists of: Retail
24—1/2 x 150 inch rolls \$9.36
12—3/4 x 240 inch rolls 9.00
1—wire display rack no charge
Total Retail Value 18.36
Dealer Profit (33 1/3%) 6.12
Per Display ■ Per Display
6-ET-M X12D24 \$18.36

Lots of 2 displays
or more X11D57
One display in ctn. Wt. display 3 1/2 lbs.



1/2 x 150 Inch Roll Display

Each roll sealed in an acetate "blister" and mounted on individual card.

Per Display ■ Each
K704M (197) X3D12★ \$0.39

Lots of 6 displays X2D95★
Lots of 24 displays X2D81★

Twelve rolls in display, twelve displays in ctn.
Wt. ctn. 10 1/2 lbs.



3/4 x 240 Inch Roll Display

In a display carton. Each roll individually wrapped in cellophane.

Per Display ■ Per Display
K709M (198) X6D00 \$0.00

Lots of 6 Displays X5D67
Lots of 24 Displays X5D40

Twelve rolls in display, twelve displays in ctn.
Wt. ctn. 13 1/2 lbs.

3/4 inch x 20-Foot Rolls
Per Roll ■ Per Roll
K696M (33) D5C5★ \$0.75

Lots of 12 D5C0★
Lots of 48 D4C4★

Twelve rolls in tube. 144 rolls in standard pkg
Wt. pkg. 14 lbs.



1/2 x 150 Inch Roll Display

Each roll individually wrapped in cellophane.

Per Display ■ Each
K698M (196) X3D12 \$0.39

Lots of 6 to 23 X2D95
Lots of 24 or more X2D81

Twelve rolls in display, twelve displays in ctn. Wt. ctn. 8 1/2 lbs.

Can assort K698M, K704M and K709M to get quantity prices.

Direct Shipment

Keen Kutter tapes may be ordered direct from factory, at D1C2 1/2% less than case lot prices, on minimum order of 100 lbs. or more in full case lots. F. O. B. St. Louis, Mo. full freight allowed on 100 lbs. or more.

STAR ★ DENOTES BEST SELLER

DUTCH BRAND

Convenient sized rolls for many electrical, radio, television and household uses. Stands up under severest conditions. Resists action of water, oils, acids, etc. Thin, yet has high dielectric strength. Stretches and conforms readily to irregular surfaces.



Contains 12 rolls, 3/4 inch by 150 in. long.

Per Display ■ Each
K686M (125) X2D50 \$0.35

One display in box. Wt. box 1 3/4 lbs.



Tool Kit Size Rolls

Contains 12 rolls 3/4 in. by 20 ft. long.

Per Display ■ Each
K687M (125) X6D00 \$0.75

Lots of 3 displays or more X5D28

One display in box. Wt. box 1 lb.

INSULATED STAPLES

EAGLE NAIL-IT



Copper Finish

The New Eagle Nail-It Staple is started by holding it at the side of the short leg and only the long leg is driven in to start; will not bend.

An outstanding innovation, incorporates the dimensions of the two most popular sizes in use.

(256)

Per Box **K190M D0C8½**—Fifty staples in a box \$0.15
Twenty boxes or one thousand in a carton
Sold Only in Full Boxes



Insulation is moisture proof, which prevents short circuits of wire under staples. For use on radio work, door bells, telephones, bell and buzzer signals.

Copper Finish

(1D/50)

Per Box	Lgth., ins.	Width ins.	Wt. Ctn., lbs.	Per Box
K187M D0C9	½	⅝	2	\$0.15

(3D/50)

K188M D0C9★	¾	⅝	2	.15
--------------------	---	---	---	-----

(5D/50)

K189M D0C9★	¾	¾	2	.15
--------------------	---	---	---	-----

Fifty in a box,

Twenty boxes or one thousand, in a carton
Sold Only in Full Boxes

Painted—Size No. 5

Length ⅝ inch. Width ¼ inch.

(264W)


Per Box	Color	Wt. Ctn., lbs.	Per Box
K193M D0C8★	White (264B)	2	\$0.12
K191M D0C8★	Brown	2	.12

Forty in a box,

Twenty-five boxes or one thousand, in a carton
Sold Only in Full Boxes

MOULDING CLIPS

EAGLE



Hold Tite moulding clips are easily installed—are much easier to handle than staples. Special tongue holds them on once in place.

Per Card	Color	Per Card
K85M D0C6½★	Brown	\$0.10
K86M D0C6½★	Ivory	.10

Ten clips on a card
100 cards in a standard package
Weight per package 7 lbs.

Sold Only in Full Cards

WOOD BRACKETS



Made of oak wood. **Painted Red.** Carefully threaded to fit insulators.

Size 1½x2x10 inches

Per Bdl. Each
7-10WB-M N-X5D50 \$0.10

100 in bdl Wt. bdl. 52 lbs.

We Do Not Break Bundles

WIRE HOLDERS



R. E. A. Type Approved Reinforced—Steel Strap

Porcelain, highly vitreous insulator, brown glaze. Height 3 inches. Diameter 2 inches. Hole ⅝ inch. With No. 22x2¼ inch galvanized screw lead into porcelain knob. Seats firmly against building even if screw is started at slight angle.

(1984)

Each	Each
K1106M D4C2★	\$0.70
KX1106M D3C8★ —(Case lots of 100)	

Five in a box. Wt. Box 3½ lbs.

Sold Only in Full Boxes

Porcelain, highly vitreous insulator, brown glaze. Height 3 inches. Diameter 2 inches. Hole ⅝x⅝ inch. Cadmium plated steel 2¼-inch screw, lead in. For ordinary electrical service.

(192°)

Each	Each
K1102M D3C3	\$0.55
KX1102M D3C0 —(Case lots of 50)	

Five in a box. Wt. box 3½ lbs.

Sold Only in Full Boxes

Porcelain, highly vitreous insulator, brown glaze. Height 2 inches. Diameter 1½ inches. Hole ¼ inch. Cadmium plated steel 1½-inch screw, lead in. Ideal for radio aerials and other light work.


(1933)

Each	Each
K1104M D2C0★	\$0.35
KX1104M D1C8★ —(Case lots of 100)	

Ten in a box. Wt. box 3 lbs.

Sold Only in Full Boxes**STAR ★ DENOTES BEST SELLER**

PORCELAIN NAIL KNOBS



Made of white porcelain; assembled with nail; standard size 1½ inches long by 1½ inches in diameter; for 14-12 gauge wire.

Per Carton	Each
81-K100-M N-X4D00 —Un glazed	\$0.07

One hundred in ctn. Wt. ctn. 10½ lbs.

Sold Only in Full Cartons

PORCELAIN SOLID KNOBS



Made of white glazed porcelain, 1½ inches long by 1½ inches in diameter.

Size No. 5½

Per Carton	Each
81-5½/100-M N-X2D75	\$0.05

One hundred in ctn. Wt. ctn. 12 lbs.

SOLD ONLY IN FULL CARTONS

Electrical Wiring Device Treasure Chest

EAGLE

FOR YOUR CONVENIENCE

ALL MERCHANDISE

PACKED IN DISPLAY

JUST SET UP AND SELL!

ENTIRE UNIT PACKED IN

CORRUGATED SHIPPING CARTON

HEAVY GAUGE STEEL CHEST

20 inches Wide

12 inches Deep

28 inches High

Bins 4½ inches High

ATTRACTIVELY COLORED

HERE'S WHAT YOU GET!

A Really Complete Department
of **EAGLE** Quality Products

THE UNIT THAT HAS EVERYTHING! SOMETHING FOR EVERYBODY!

24 TYPES OF EVERYDAY ELECTRICAL NECESSITIES

257 QUICK-SELLING AND PROFITABLE UNITS

PLUS—FREE—ATTRACTIVE EYE APPEALING—SALES COMPELLING
METAL SELF SELLING MERCHANDISE DISPLAY FIXTURE

Just Look—at all these best sellers.

All Items Listed by Underwriters' Laboratories



QUAN- TITY	OUR No.	FACTORY CAT. No.	DESCRIPTION	Retail	Total
50	K535M	(690)	15 Amp. OK Plug Fuses.... (Box of 5)	.39	3.90
50	K538M	(690)	30 Amp. OK Plug Fuses.... (Box of 5)	.39	3.90
5	K1320M	(751)	Spring-Lok Cord Set.....	.85	4.25
5		(745V)	Ivory 3 Way Extension Cord.....	.85	4.25
5	K1317M	(730)	Switch Plug Cord Set.....	1.29	6.45
5	K1274M	(785V)	9 Ft. Ivory Extension Cord.....	.50	2.50
5	K1309M	(785B)	9 Ft. Brown Extension Cord.....	.45	2.25
5	K1324M	(721)	Miniature Cord Set.....	.85	4.25
6	K1366M	(840C)	Colored Nite Lamps..... (2 Ivory, 2 Blue, 2 Rose)	.60	3.60
6	K1365M	(840B)	Brown Nite Lamps.....	.60	3.60
7	K833M	(960BD)	Pull Chain Sockets.....	.49	3.43
6	K836M	(940BD)	Push Thru Sockets.....	.38	2.28
6	K932M	(718V)	Ivory Pull Chain Current Taps.....	.40	2.40
6	K931M	(718B)	Brown Pull Chain Current Taps.....	.35	2.10
12	K1036M	(758B)	Brown Attachment Plug Bases.....	.10	1.20
10	K815M	(780V)	Ivory Cube Taps.....	.25	2.50
10	K814M	(780B)	Brown Cube Taps.....	.20	2.00
8	K733M	(743B)	Brown Triple Taps.....	.25	2.00
10	K908M	(733B)	Brown Duplex Receptacles.....	.20	2.00
10	K753M	(787B)	Brown Single Pole Toggle Switches.....	.29	2.90
10	K1025M	(179)	Rubber Handle Caps.....	.15	1.50
10	K1034M	(791B)	Brown Attachment Plug Caps.....	.15	1.50
5 Boxes (40 ea.)	K191M	(264B)	Brown Insulated Staples.....	.12	.60
5 Boxes (40 ea.)	K193M	(264V)	White Insulated Staples.....	.12	.60

RETAIL VALUE OF MERCHANDISE	\$65.96
PERMANENT METAL FIXTURE WORTH	20.00
TOTAL VALUE	\$85.96

Each

(264W)

Each

61-D815-M X45D00

\$65.96

One Assortment in a Case. Weight 45 lbs.

ELECTRIC WIRING DEVICES

Listed by Underwriter's Laboratories, Inc.

LEV-O-LET

For every type of surface wiring installation, wherever non-metallic sheathed cable can be used.

Bases and covers of brown urea, a thermo-setting plastic of low arcing characteristic. Large terminals. High barriers between terminal screws for extra insulation. Knockouts for both No. 12 or 14 standard non-metallic sheathed cable, 2 or 3 wire. Knockouts on bottom of base for back wiring, on sides for knob and tube wiring. Two wood screws to hold base down. Cover is tightened with two screws to clamp the wire and make interior safe from dust. Base 1 3/4 inches wide and 5 inches long.

SWITCHES



Single Pole "T" Rated

5 Amperes—250 Volts

10 Amperes—125 Volts

Each
K761M (5231) **D7C3★** \$1.10
KK761M (5231) **D6C7 1/2 ★**—(Standard pkg. 50)
 One in ctn., fifty in std. pkg. Wt. pkg. 22 lbs.

Three Way "T" Rated

5 Amperes—250 Volts

10 Amperes—125 Volts

Each
K765M (5233) **D8C5** \$1.30
KK765M (5233) **D8C0**—(Standard pkg. 50)
 One in ctn., fifty in std. pkg. Wt. pkg. 22 lbs.

LAMP HOLDERS



Pull Chain

660 Watts—250 Volts

Each
K934M (5235) **D8C0★** \$1.20
KK934M (5235) **D7C5★**—(Standard pkg. 50)
 One in ctn., fifty in std. pkg. Wt. pkg. 24 lbs.



Keyless

660 Watts—250 Volts

Each
K941M (5236) **D6C3★** \$0.95
KK941M (5236) **D6C0★**—(Standard pkg. 50)
 One in ctn., fifty in std. pkg. Wt. pkg. 25 lbs.

RECEPTACLES



Duplex—Double Contacts

10 Amperes—250 Volts

15 Amperes—125 Volts

Each
K925M (5230) **D5C4★** \$0.85
KK925M (5230) **D5C0★**—(Standard pkg. 50)
 One in ctn., fifty in std. pkg. Wt. pkg. 20 lbs.

WALL SWITCHES

TAP-LITE



Display

Display consists of colorful standup rack and header card featuring three types of switch packages—1-gang single pole, 1-gang 3-way and 2-gang single pole. Easy-to-understand instructions included.

Six new decorator insert selections included with every switch. Unlimited decorator possibilities with paint, wallpaper or fabrics. Satin-ivory push button, convex switch plate.

	Suggested Retail Unit Price	Total Retail Value
Consists of colorful counter-display carton enclosing:		
10 one-gang plates with single-pole switches.....	\$1.95	\$19.50
4 one-gang plates with three-way switches.....	2.45	9.80
1 two-gang plates, each with two single-pole switches..	4.00	4.00
		\$33.30
Dealer cost.....		20.81
Dealer profit.....		\$12.49
Per Asst. 6-11PA34-M X20D81.....		\$33.30
One asst. in ctn. Wt. ctn. 7 lbs.		



Two-gang plate with four decorator insert colors and two single-pole switches. Satin-ivory button.


Each
K616M (11PA37) **X2D85** \$4.00
 Lots of 10 **X2D70**

Ten in box, thirty in ctn. Wt. ctn. 30 lbs.

Three-gang plates with four decorator insert colors and three single-pole switches. Satin-ivory button.

Each
K1116M (11PA23) **X4D30** \$5.95
 Lots of 5 **X3D95**

Five in box, fifteen in ctn. Wt. ctn. 15 lbs.

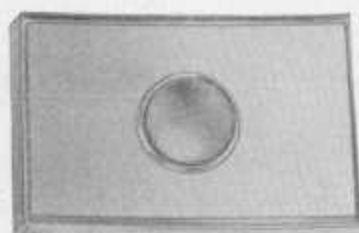

Single pole switch and plate with four decorator insert colors. Satin-ivory button.

Each
K614M (11PA35) **X1D40** \$1.95
 Lots of 10 **X1D30**
 Ten in box, 100 in ctn. Wt. ctn. 50 lbs.

Three-way switch and plate, with four decorator insert colors. Satin-ivory button.

Each
K615M (11PA36) **X1D80** \$2.45
 Lots of 10 **X1D68**
 Ten in box, thirty in ctn. Wt. ctn. 15 lbs.

STAR ★ DENOTES BEST SELLER

MERCURY TOGGLE SWITCHES

Listed by Underwriters' Laboratories, Inc.

GENERAL ELECTRIC



Silent. No noisy click. T rated.

5 Amperes—250 Volts

10 Amperes—125 Volts

15 Amperes—120 Volts

Single Pole, Ivory Handle (1316/2)

Each	Each
K1414M	\$1.10
Less than carton lots	D9C0★
Full carton lots	D7C9★
KK1414M—Standard package	
Lots (50)	D6C8★

Single Pole, Brown Handle (1316/1)

K1413M	.99
Less than carton lots	D8C1★
Full carton lots	D7C1★
KK1413M—Standard package	
Lots (50)	D6C1★
One on display card, five in ctn., 50 in std. pkg. Wt. pkg. 9 lbs.	



Three Way, Ivory Handle (1317/2)

Each	Each
K1416M	\$1.98
Less than carton lots	X1D62
Full carton lots	X1D43
KK1416M—Standard package	
Lots (50)	X1D23

Three Way, Brown Handle (1317/1)

K1415M	1.87
Less than carton lots	X1D53
Full carton lots	X1D35
KK1415M—Standard package	
Lots (50)	X1D16

One on display card, five in ctn.,
50 in std. pkg. Wt. pkg. 12 lbs.

STAR ★ DENOTES BEST SELLER

FLUSH TOGGLE SWITCHES

Listed by Underwriters' Laboratories, Inc.

GENERAL ELECTRIC

Spring Type



Toggle Type

Indicating, shallow

1-inch Textolite box, ratings:

5 ampere—250 volts

10 ampere—125 volts "T"

Single Pole, Ivory Handle (GE3027)

Each	Each
K599M	\$0.76 1/2
Less than carton lots	D6C3
Full carton lots	D5C5
KK599M	
Std. pkg. lots (100)	D4C7 1/2
Ten in ctn. 100 in standard pkg. Wt. pkg. 17 lbs.	

Single Pole, Brown Handle (GE2841)

Each	Each
K590M	\$0.71
Less than carton lots	D5C8
Full carton lots	D5C1
KK590M	
Std. pkg. lots (100)	D4C4
Ten in ctn. 100 in standard pkg. Wt. pkg. 19 lbs.	



Toggle Type

Non-indicating

Shallow 1 inch Textolite box.

5 ampere—250 volts

10 ampere—125 volts "T"

Three Way, Brown Handle (GE2514)

Each	Each
K577M	\$0.97
Less than carton lots	D7C9 1/2
Full carton lots	D7C0
KK577M	
Std. pkg. lots (50)	D6C0
Ten in ctn. 50 in standard pkg. Wt. pkg. 10 lbs.	

FLUSH TOGGLE SWITCHES

Listed by Underwriters' Laboratories, Inc.

GENERAL ELECTRIC



T rated. No binding screws. Simply strip wire and push into pressure-lock terminals. Break-off plaster ears.

5 Amperes—250 Volts
10 Amperes—125 Volts

Single Pole, Ivory Handle
(1329/2)

Each	Each
K1418M	\$0.423
Less than carton lots	D3C5
Full carton lots	D3C1

KK1418M—Standard package
Lots (100) D2C6

Single Pole, Brown Handle

(1329/1)	.381
K1417M	
Less than carton lots	D3C2
Full carton lots	D2C8

KK1417M—Standard package
Lots (100) D2C4

One on instruction display card,
ten in ctn., 100 in std. pkg. Wt. pkg. 14 lbs.

Three Way, Brown Handle

(1330/1)	Each
K1419M	\$0.483
Less than carton lots	D4C0
Full carton lots	D3C5

KK1419M—Standard package
Lots (100) D3C3

One on instruction display card,
ten in ctn., 100 in std. pkg. Wt. pkg. 16 lbs.

FLUSH TOGGLE SWITCHES

Listed by Underwriter's Laboratories, Inc.

LEVITON

New design. Outstanding for residential, commercial or industrial use.

Superb mechanism adapting a high grade bronze for wide double wiping contacts, with snuffer action.

Top terminal screws with large heads. Heavily plated strap of heavy gauge steel with $1\frac{1}{8}$ inch plaster break-off ears. Tumblers clearly marked off and on.



Type C-T Rated

Single Pole

10 Amperes—125 Volts
5 Amperes—250 Volts

Ivory Handle
(50011)

Each	Each
K871M	\$0.49
KK871M	D3C2★
	D2C9½★ (Standard package 100)

Brown Handle
(5001)

K870M	D2C8★	.45
KK870M	D2C6★ (Standard package 100)	

Ten in ctn., 100 in std. pkg. Wt. pkg. 18 lbs.



Three Way

10 Amperes—125 Volts
5 Amperes—250 Volts
Three Way, Ivory Handle
(50031)

Each	Each
K873M	\$0.55
KK873M	D3C6
	D3C4 (Standard package 100)

Three Way, Brown Handle
(5003)

K872M	D3C3	.50
KK872M	D3C1 (Standard package 100)	

Ten in ctn., 100 in std. pkg. Wt. pkg. 19 lbs.

FLUSH TOGGLE SWITCHES

Listed by Underwriters' Laboratories, Inc.

PAULDING

Approved for R. E. A. Work

Intermediate Grade

"T" rated mechanism, high quality throughout. Wide strap, plaster ears; enclosed mechanism in small bakelite box. Shallow type, 1 inch deep. Top wiring, easy to wire and test, long bakelite handle, large binding screws.

10 Amperes—125 Volts "T" Rating
5 Amperes—250 Volts
Single Pole; Ivory Handle
(951T1)

Each	Each
K760M	D2C4★
KK760M	D2C2 (Case lots of 100)★
	Single Pole; Brown Handle (951T)
K759M	D2C1★
KK759M	D1C9½★ (Case lots of 100)
	Ten in ctn., 100 in case Wt. case 14 lbs.



PAULDING

Approved for R. E. A. Work

Intermediate Grade

"T" rated mechanism, brush contacts, quick make and break, sturdy construction; heavy porcelain box approximately 1 inch deep, enclosed mechanism. Wide strap, plaster ears; top wiring; long bakelite handle.

10 Amperes—125 Volts "T" Rating
5 Amperes—250 Volts
Toggle Type; Non-Indicating

Three Way, Ivory Handle
(956T1)

Each	Each
K907M	\$0.49
KK907M	D3C2★
	D3C0 (Case lots 100)★

Three Way, Brown Handle
(956T)

K906M	D2C9★	.45
KK906M	D2C7½★ (Case lots 100)	

Ten in ctn., 100 in case. Wt. case 16 lbs.

MERCURY TOGGLE SWITCHES

Listed by Underwriters' Laboratories, Inc.

GENERAL ELECTRIC



Silent. No noisy click. T rated.

5 Amperes—250 Volts

10 Amperes—125 Volts

15 Amperes—120 Volts

Single Pole, Ivory Handle
(1316/2))

Each	Each
K1414M	\$1.10
Less than carton lots	D9C0★
Full carton lots	D7C9★
KK1414M—Standard package	
Lots (100)	D6C8★

Single Pole, Brown Handle
(1316/1)

K1413M	99
Less than carton lots	D8C1★
Full carton lots	D7C1★
KK1413M—Standard package	
Lots (100)	D6C1★

One on display card, five in ctn.,
100 in std. pkg. Wt. pkg. 18 lbs.

Sold Only in Full Cartons



Three Way, Ivory Handle
(1317/2)

Each	Each
K1416M	\$1.98
Less than carton lots	X1D62
Full carton lots	X1D43
KK1416M—Standard package	
Lots (50)	X1D23

Three Way, Brown Handle
(1317/1)

K1415M	1.87
Less than carton lots	X1D53
Full carton lots	X1D35
KK1415M—Standard package	
Lots (50)	X1D16

One on display card, five in ctn.,
50 in std. pkg. Wt. pkg. 12 lbs.

FLUSH TOGGLE SWITCHES

Listed by Underwriters' Laboratories, Inc.

GENERAL ELECTRIC

Spring Type



Toggle Type
Indicating, shallow

1-inch Textolite box, ratings:

5 ampere—250 volts

10 ampere—125 volts "T"

Single Pole, Ivory Handle
(GE3027)

Each	Each
K599M	\$0.75
Less than carton lots	D6C1½
Full carton lots	D5C4

KK599M	
Std. pkg. lots (100)	D1C5½
Ten in ctn. 100 in standard pkg. Wt. pkg. 17 lbs.	

Single Pole, Brown Handle
(GE2841)

Each	Each
K590M	\$0.70½
Less than carton lots	D5C8
Full carton lots	D5C1

KK590M	
Std. pkg. lots (100)	D4C4
Ten in ctn. 100 in standard pkg. Wt. pkg. 19 lbs.	

PAULDING

Approved for R. E. A. Work
Intermediate Grade



"T" rated mechanism, high
quality throughout. Wide strap,
plaster ears; enclosed mechanism
in small bakelite box. Shallow
type, 1 inch deep. Top wiring,
easy to wire and test, long bakelite handle,
large binding screws.

10 Amperes—125 Volts "T" Rating
5 Amperes—250 Volts
Single Pole; Ivory Handle

Each	Each
K760M	\$0.35
KK760M	(501T1) D2C2★ (Case lots of 100)

Single Pole; Brown Handle	
K759M	(951T) D2C1★ \$0.30
KK759M	(951T) D1C9½★ (Case lots of 100)

Ten in ctn., 100 in case
Wt. case 14 lbs.

Sold Only in Full Cartons

STAR ★ DENOTES BEST SELLER

PAULDING

Approved for R. E. A. Work
Intermediate Grade



"T" rated mechanism, brush con-
tacts, quick make and break, sturdy
construction; heavy porcelain box
approximately 1 inch deep, enclosed
mechanism. Wide strap, plaster
ears; top wiring; long bakelite handle.

10 Amperes—125 Volts "T" Rating
5 Amperes—250 Volts

Toggle Type; Non-Indicating
Three Way, Ivory Handle

Each	Each
K907M	(956T1) D2C9½★ \$0.49
KK907M	(956T1) D2C7½★ (Case lots 100)

Three Way, Brown Handle

K906M	(956T) D2C6½★ .45
KK906M	(956T) D2C4½★ (Case lots 100)
Ten in ctn., 100 in case. Wt. case 16 lbs.	

Sold Only in Full Cartons

LEVITON



New design. Outstanding for residential, com-
mercial or industrial use.

Superb mechanism adapting a high grade
bronze for wide double wiping contacts, with
snuffer action.

Top terminal screws with large heads. Heavily
plated strap of heavy gauge steel with 1¼ inch
plaster break-off ears. Tumblers clearly marked
off and on.

Type C—T Rated
Single Pole

10 Amperes—125 Volts
5 Amperes—250 Volts
Ivory Handle

Each	Each
K871M	(50011) D3C2★ \$0.49
KK871M	(50011) D2C9½★ (Std. pkg. 100)

Brown Handle

K870M	(5001) D2C8★ .45
KK870M	(5001) D2C6★ (Std. pkg. 100)
Ten in ctn., 100 in std. pkg. Wt. pkg. 18 lbs.	

Sold Only in Full Cartons

Three Way

10 Amperes—125 Volts
5 Amperes—250 Volts
Three Way, Ivory Handle

Each	Each
K873M	(50031) D3C6 \$0.55
KK873M	(50031) D3C4 (Std. pkg. 100)

Three Way, Brown Handle

K872M	(5003) D3C3 .50
KK872M	(5003) D3C1 (Std. pkg. 100)
Ten in ctn., 100 in std. pkg. Wt. pkg. 19 lbs.	

FLUSH TOGGLE SWITCHES

Listed by Underwriters' Laboratories, Inc.

EAGLE

Approved for R. E. A. Work

**Competitive Grade "T" Rated**

With plaster ears and luminous "on" and "off" plainly marked on toggle. Ears exceptionally wide measuring 1 inch makes easy installation. Ears easily removed when desired. Sturdy all bakelite construction.

Single Pole; Indicating

10 Amperes—125 Volts "T" Rating
5 Amperes—250 Volts

Each	Handle	Each
K756M (777V) D2C4★	Ivory	\$0.33
KK756M (777V) D2C2★	(Case lots 100)	
K755M (777B) D2C1★	Brown	.20
KK755M (777B) D1C9½★	(Case lots 100)	

Ten in ctn., 100 in case

Wt. case 16 lbs.

Sold Only in Full Cartons

Three Way

6 Amperes—125 Volts "T" Rating
3 Amperes—250 Volts

Each	Handle	Each
K758M (783V) D2C9½	Ivory	\$0.43
KK758M (783V) D2C7½	(Case lots 100)	
K757M (783B) D2C6½	Brown	.38
KK757M (783B) D2C4½	(Case lots 100)	

Ten in ctn., 100 in case

Wt. case 17 lbs.

Approved for R. E. A. Work

EAGLE**Competitive Grade "T" Rated**

Luminous "on" and "off" plainly marked on toggle enables locating switch in dark. Large head sturdy 8/32 wire screws that are staked, allow easy and quick wiring. Ears exceptionally wide measuring 1 inch facilitates easy installation in new work.

Sturdy all bakelite construction.

Single Pole, Indicating

10 Amperes—125 Volts "T" Rating
5 Amperes—250 Volts

Each	Handle	Each
K754M (770V) D2C1★	Ivory	\$0.20
KK754M (770V) D1C9½★	(Case lots 100)	
K753M (770B) D1C7½★	Brown	.25
KK753M (770B) D1C6½★	(Case lots 100)	

Ten in ctn., 100 in case

Wt. case 15 lbs.

Sold Only in Full Cartons

FLUSH TOGGLE SWITCHES

Listed by Underwriters' Laboratories, Inc.

SNAP-IT**Competitive Grade**

Heavy duty bakelite housing. Deep wire-retaining walls. Heavy 8-32 binding head screws, backed out for quicker wiring. Positive rugged mechanism.

**Single Pole—Plaster Ears**

Exceptionally wide plaster ears for easy installation.

10 Amperes—125 Volts
5 Amperes—250 Volts

Each	Handle	Each
K719M (1111C) D1C8½	Ivory	\$0.20
KK719M (1111C) D1C7	(Case lots 200)	
K718M (1111) D1C5½	Brown	.25
KK718M (1111) D1C4½	(Case lots 200)	

One on Card. 200 in std. pkg. Wt. pkg. 26 lbs.

**Single Pole—Wide Ears**

Rigid copper-plated mounting strap.

10 Amperes—125 Volts
5 Amperes—250 Volts

Each	Handle	Each
K723M (1111C) D1C7½	Ivory	\$0.27
KK723M (1111C) D1C6	(Case lots 200)	
K722M (1111) D1C4½	Brown	.25
KK722M (1111) D1C3½	(Case lots 200)	

One on card. 200 in std. pkg. Wt. pkg. 31 lbs.

**PAULDING****Double Pole****Intermediate Grade****Porcelain Exterior**

Toggle Type; Indicating;
Side Connection.

10 Amperes—250 Volts

Each	Handle	Each
K770M (6002S) D3C6	Brown	\$0.51
KK770M (6002S) D3C5	(Case lots 100)	

One in box, ten in ctn., 100 in case

Wt. case 32 lbs.

PUSH BUTTON SWITCHES

Listed by Underwriters' Laboratories, Inc.

**LEVITON****Push Button Type**

Porcelain Housing.
Side Connection.

10 Amperes—125 Volts
5 Amperes—250 Volts

No. 6001SB

Single Pole; Indicating

Each		Each
K768M (5001SB) D3C2		\$0.45
KK768M (5001SB) D2C9	(Case lots 100)	

One in box, 10 in ctn. 100 in case

Wt. case 26 lbs.

ELECTRIC SWITCHES**ARROW HART****Lockette**

Control the use of your power tool outlet and protect children from high speed blades and cutting edges of workshop. Eliminates dryer, wringer and washer hazards. Operates like the ignition switch in car. When key is turned to off, electricity is turned off. Remove key and the switch has to be off. Curious probing in empty key slot cannot result in electric shock or blown fuses.

Easy to install in a few minutes.

Consists of:

4 No. K1411M-71520 Lockettes
1 Counter Display Card

D3C8%	Per Deal	Per Deal
61-71522-M X12D35		\$19.92

One deal in ctn. Wt. ctn. 7 lbs.

OPEN STOCK

D3C3½%	Each	Each
K1411M (71520) X3D32		\$4.98
D2C8%		
Lots of 4, X3D09		

Four in box, with merchandising instruction tag.
Ten in ctn. Wt. ctn. 10½ lbs.

STAR ★ DENOTES BEST SELLER

DUPLEX BAKELITE SWITCHES

Listed by Underwriters' Laboratories, Inc.

EAGLE

Can be Installed in a Single Gang Switch Box with a Standard Duplex Receptacle Plate (No. 103).



DUPLEX TUMBLER SWITCHES

Two Single Pole Units
Separate Circuits
5 Amperes—250 Volts
10 Amperes—125 Volts
Brown Bakelite Housing
Metal Strap

(3210)

Each D3C9.....\$0.59

KK743M D3C9—(Case lots 100)
Ten in ctn., 100 in standard pkg.
Wt. pkg. 25 lbs.

EAGLE

SINGLE POLE SWITCH AND RECEPTACLE Single Circuit

Receptacle is Independent of the Switch; Must be Used with Three Wires; Brown Bakelite Housing; Metal Strap.



Switch { 5 Amperes—250 Volts
10 Amperes—125 Volts
Receptacle
10 Amperes—250 Volts
15 Amperes—125 Volts

(3201)

Each D3C7★.....\$0.55

KK742M D3C7★—(Case lots 100)
Ten in ctn., 100 in standard pkg.
Wt. pkg. 26 lbs.

SURFACE SWITCHES

Listed by Underwriters' Laboratories, Inc.

EAGLE



This new switch not only is exceptionally well made, but is the most beautiful on the market. Porcelain base, with a modern eagle designed bakelite cover. Cover snaps on and off and is firmly held.

Luminous "on" and "off" enables locating switch in the dark.

10 Amperes—125 Volts
5 Amperes—250 Volts
Single Pole, Indicating
(735B)

Each D2C2½★.....\$0.35

KK804M D2C0½★—(Case lots 100)

Ten in ctn., 100 in case
Wt. case 20 lbs.

Sold Only in Full Cartons



SNAPIT

Competitive Grade
Toggle Type

Slotted brown bakelite base and cover.

10 Amperes—125 Volts
5 Amperes—250 Volts

Single Pole, Indicating

Each (200) D2C1★.....\$0.30

KK802M (200) D2C1★—(Case lots 100)

Sold Only in Full Cartons

Three Way; Non-Indicating
(233)

Each D3C3.....\$0.50

KK803M D3C0—(Case lots 100)

Ten in ctn., 100 in case
Wt. case 18 lbs.



EAGLE

Competitive Grade

Single pole, indicating toggle switch. Brown Bakelite housing. Mounted on heavy gauge steel plate aluminum sprayed.

10 Amperes—125 Volts "T" Rating
5 Amperes—250 Volts

For 4-inch Box, Single Pole, Indicating

(779)

Each D2C5★.....\$0.40

KK806M D2C3★—(Case lots 100)

Ten in ctn., 100 in case
Wt. case 45 lbs.

STAR ★ DENOTES BEST SELLER

PENDANT SWITCHES

Listed by Underwriters' Laboratories, Inc.

EAGLE

Competitive Grade

Pendant toggle switch to control ceiling light. Three outlets for appliances. Convenient outlets always "Live". Made of brown bakelite.



(760B)

Each D3C5.....\$0.55

KK773M D3C5—(Case lots 100)
10 in ctn., 100 in standard pkg.
Wt. pkg. 15 lbs.

EAGLE

Competitive Grade

Push Through Type, Small and Compact; Brush Brass Finish. Pendant Cap



6 Amperes—125 Volts

3 Amperes—250 Volts

(6070)

Each D2C7.....\$0.49

KK776M D2C5—(Case lots 100)

10 in ctn., 100 in standard pkg.
Wt. pkg. 9 lbs.

FIXTURE SWITCHES

Listed by Underwriters' Laboratories, Inc.

LEVOLIER



Its use is suggested in the modern shallow canopies, or where only limited space is available. With 4 foot cord. One piece brown phenolic case. Metal parts burnished nickel finished.

6 Amperes—125 Volts (T)

3 Amperes—250 Volts

(415)

Each
K745M D7C3 \$1.10
KK745M D5C8—(Case lots 100)

Ten in box, 100 in ctn. Wt. ctn. 10 lbs.

EAGLE



Canopy Pull—Single Pole

Double wiping contact type. Bakelite housing with metal covers. Phosphor bronze contacts. Copper wire leads welded to contacts. Nickel finish hex locknut. Knurled aluminum bell mouth. Ball chain extends 2 inches beyond bell mouth. Four foot white cord with chain connector and tassel.

Body 1 inch diameter, $\frac{3}{16}$ inch thick. Shank $\frac{3}{8}$ -27, thread $\frac{3}{4}$ inch long. Wire leads 6 inches long No. 18TF wire, tinned conductors, ends stripped $\frac{3}{4}$ inch.

6 Amperes—125 Volts

3 Amperes—125 Volts (T)

3 Amperes—250 Volts

(442)

Each
K771M D2C8 \$0.44

KK771M D2C6—(Case lots 250)

Twenty-five in box, 250 in case. Wt. case 23 lbs

EAGLE



Its use is suggested in the modern shallow canopies, or where limited space is available. Unusually small. 6 inch heat resisting plastic wire leads, $\frac{3}{4}$ inch shank. With cord

3 Amperes—125 Volts (T)

1 Ampere—250 Volts

(10071P)

Each
K752M D2C0 $\frac{1}{2}$ ★ \$0.29

KK752M D1C9 $\frac{1}{2}$ ★—(Case lots 200)

25 in ctn., 200 in standard pkg., Wt. pkg. 12 lbs.

FIXTURE SWITCHES

Listed by Underwriters' Laboratories, Inc.

LEVITON



Single Pole

For use in lighting equipment and other industrial applications where electrical control is required. Also for signaling equipment, aircraft circuit control systems, communication apparatus and instrument panel boards.

Black bakelite case 1x $\frac{1}{2}$ inch with metal cover and "on" and "off" indicating plate. $\frac{3}{8}$ inch shank. 6 inch heat resisting CF wire leads.

6 Amperes—125 Volts

3 Amperes—250 Volts

(720)

Each
K750M D2C2★ \$0.35

KK750M D2C1★

25 in ctn., 250 in standard pkg., Wt. pkg. 9 lbs.



Canopy Push Switches

A replacement canopy switch for bracket lights, etc. 6 inch heat resisting plastic wire leads, $\frac{3}{4}$ inch shank. Bakelite knob.

3 Amperes—125 Volts (T)

1 Ampere—250 Volts

(575)

Each
K749M D1C5 $\frac{1}{2}$ ★ \$0.22

KK749M D1C4 $\frac{1}{2}$ ★—(Case lots 250)

25 in ctn., 250 in standard pkg., Wt. pkg. 9 lbs.



Rotary Canopy Switches

A replacement canopy switch for bracket lights, etc. 6 inch heat resisting plastic wire leads, $\frac{3}{4}$ inch shank with removable metal knob. Brass finish.

3 Amperes—125 Volts (T)

1 Ampere—250 Volts

(10071)

Each
K751M D1C7 \$0.25

KK751M D1C5 $\frac{1}{2}$ ★—(Case lots 250)

25 in ctn., 250 in standard pkg.

Wt. pkg. 19 lbs.

STAR ★ DENOTES BEST SELLER

FIXTURE SWITCHES

Listed by Underwriters' Laboratories, etc.

LEVITON



Rotary Canopy Switches

A replacement canopy switch for bracket lights, etc. 6 inch heat resisting plastic wire leads, $\frac{3}{4}$ inch shank with fixed bakelite knob.

6 Amperes—125 Volts (T)

3 Ampere—250 Volts

(572)

Each
K747M D1C3 \$0.19

KK747M D1C2—(Case lots 250)

25 in ctn., 250 in standard pkg., Wt. pkg. 8 lbs.



Two Circuit—Rotary Canopy Switches

A replacement canopy switch for floor lamps, etc. Three 6 inch heat resisting plastic wire leads, colored black, green and red. $\frac{3}{4}$ inch shank with fixed metal knob, brush brass finish.

3 Amperes—125 Volts (T)

1 Ampere—250 Volts

(573T)

Each
K748M D1C9 \$0.29

KK748M D1C8—(Case lots 250)

25 in ctn., 250 in standard pkg.

Wt. pkg. 12 lbs.

FEED-THRU SWITCHES

Listed by Underwriters' Laboratories, etc.

SNAPIT



Competitive Grade

Brown bakelite feed-thru switch for controlling electrical appliances, such as irons, lamps, toasters, etc. Rocker type mechanism. Made to accommodate all popular sizes of wire.

10 Amperes—125 Volts

5 Amperes—250 Volts

(30)

Each
K740M D2C4★ \$0.35

KK740M D2C2★—(Case lots 100)

One on card. 100 in standard pkg.

Wt. pkg. 10 lbs.

PORCELAIN ELECTRIC SOCKETS

Listed by Underwriters' Laboratories, Inc.

LEVITON

Competitive Grade

Pull chain type with insulated chain and bell. Bakelite interior mechanism. Porcelain two piece shell.



660 Watts—250 Volts
1/8 inch Pendant Cap

Each			Each
K993M	(8305)	D4C4	\$0.70
KK993M	(8305)	D4C1—(Case lots 100)	

10 in ctn. 100 in case. Wt. case 31 lbs.

LEVITON

Competitive Grade

Key type Bakelite interior mechanism. Porcelain two piece shell.



250 Watts—250 Volts
1/8 inch Pendant Cap

Each			Each
K994M	(8301)	D4C1	\$0.60
KK994M	(8301)	D3C9—(Case lots 100)	

10 in ctn. 100 in case. Wt. case 30 lbs.

EXTENSION CHAINS

EAGLE

MOUNTED ON CARDS

3 Feet of Nickel Plated Bead Chain Mounted on a Card. For Use on



Sockets, Sign Receptacles, etc.
(6N)

Each		Each
K936M	D1C3 1/2 ★	\$0.20

25 cards in ctn., 250 cards in stand. pkg.
Wt. pkg. 16 lbs.

PULL CHAIN SOCKETS

Listed by Underwriters' Laboratories, Inc.

GENERAL ELECTRIC



Monowatt plastic sockets with two side outlets feature four new advantages—they are safer, more secure, easier to wire, versatile. Plastic housing will not conduct electricity and will not tarnish or rust. Each socket has "All-Purpose" Cap. Wires three ways—as threaded nozzle, pendant, or side-outlet. Locks securely—cannot pull apart, yet opens with the thumb and a twist of the wrist. Convenient, top-mounted binding screws make wiring a cinch. Two color display package illustrates instructions.

Brown Color
250 Watts—250 Volts
(1512/1)

D1C8%		Each
K597M	D4C8	\$0.75
D2C8%		
Lots of 10 D4C2		
D3C8%		
KK597M	D3C6—(Case lots 100)	

Ten in ctn., one hundred in case. Wt. case 17 lbs.



EAGLE

Competitive Grade

Pull Chain Type—Standard size, bakelite interior mechanism improves mechanical operation of socket and helps to greatly reduce breakage so prevalent with porcelain bodies. Medium base.

250 Watts; 250 Volts

Bright Dipped Brass Shell, Crimped Cap

1/8 inch Screw Cap
(960BD)

Each		Each
K833M	D3C1 ★	\$0.49
KK833M	D2C9 ★—(Case lots 250)	

Twenty-five in ctn. 250 in case. Wt. case 39 lbs.

1/8 inch Pendant Cap, Rubber Bushed
(961BD)

Each		Each
K834M	D3C3 1/2	\$0.47
KK834M	D2C8—(Case lots 250)	

25 in ctn., 250 in case. Wt. case 39 lbs.

Aluminum Shell and Cap
Dipped Brass Finish

1/8 inch Screw Cap
(960ABD)

Each		Each
K741M	D3C0	\$0.45
KK741M	D2C8—(Case lots 250)	

Twenty-five in ctn. 250 in case. Wt. case 39 lbs.

STAR ★ DENOTES BEST SELLER

ELECTRIC SOCKETS

Listed by Underwriters' Laboratories, Inc.

EAGLE

Competitive Grade Bright Dipped Brass Shell

Key Type: standard size crimped cap; bakelite interior mechanism improves mechanical operation of socket and greatly helps to lessen breakage so prevalent with porcelain bodies. Medium base.



250 Watts, 250 Volts
1/8 inch Screw Cap
(930BD)

Each		Each
K831M	D2C7 ★	\$0.40
KK831M	D2C5 ★—(Case lots 250)	

Twenty-five in ctn. 250 in case. Wt. case 38 lbs.

1/8 inch Pendant Cap, Rubber Bushed
(931BD)

Each		Each
K832M	D2C5	\$0.40
KK832M	D2C3—(Case lots 250)	

25 in ctn., 250 in case. Wt. case 38 lbs.

EAGLE

Competitive Grade Bright Dipped Brass Shell

Turn Knob Type: Standard size, crimped cap; bakelite interior mechanism improves mechanical operation of socket and helps to greatly reduce breakage so prevalent with porcelain bodies. Medium base.



250 Watts, 250 Volts
1/8 inch Screw Cap
(915BD)

Each		Each
K830M	D2C9	\$0.45
KK830M	D2C6 1/2—(Case lots 250)	

25 in ctn., 250 in case. Wt. case 37 lbs.



EAGLE

Competitive Grade For Two Filament Lamps Bright Dipped Brass Shell

Turn Knob Type; with Removable Extension Knob; Electrolier Size, Crimped Cap; Medium Base.

250 Watts, 250 Volts
1/8 inch Screw Cap
(7090)

Each		Each
K837M	D3C6	\$0.54
KK837M	D3C2 1/2—(Case lots 250)	

25 in ctn., 250 in case. Wt. case 32 lbs.

ELECTRIC SOCKETS

Listed by Underwriters' Laboratories, Inc.

EAGLE

Competitive Grade

Push-Thru Type—Electrolier size. Medium base.

600 Watts—250 Volts

Bright Dipped Brass Shell, Crimped Cap

1/8 inch Screw Cap
(6098)

Each K836M D2C4 1/2 ★ Each \$0.38

KK836M D2C4 1/2 ★—(Case lots 250)

25 in ctn., 250 in case. Wt. case 30 lbs.

BAKELITE SHELL SOCKETS

Listed by Underwriters' Laboratories, Inc.

LEVITON

Competitive Grade

Pull Chain Type; for Use on Fixtures, Drop and Extension Cords; Body Made of Genuine Bakelite; Cap Screws to Body; Medium Base.

250 Watts—250 Volts

Brown Color

1/8 inch Threaded Cap

Each K841M (95000) D3C2 Each \$0.45

KK841M (95000) D2C9—(Case lots 250)

25 in ctn., 250 in case. Wt. case 32 lbs.

MOGUL BASE SOCKETS

Listed by Underwriters' Laboratories, Inc.

LEVITON

Competitive Grade
PORCELAIN MOGUL
With Built-In Switch

Turn Knob Type; for Two Filament Lamp; Mogul Base; 3/4-inch Thread; 1-inch Hickey.

750 Watts—250 Volts

Wired For { Low Wattage the First Turn.
Medium Wattage the Second Turn.
High Wattage the Third Turn.
Off on Fourth Turn.

Each K839M (8601) D6C2 Each \$0.90

KK839M (8601) D5C8—(Case lots 50)

Fifty in case. Wt. case 35 lbs.

ELECTRIC SOCKET INTERIORS

Listed by Underwriters' Laboratories, Inc.



EAGLE

Competitive Grade

Pull Chain Standard Type; Bakelite Housing for Replacement Purposes; can be used in Brass; Bakelite or Rubber Shells.

250 Watts—250 Volts
(3600)

Each K846M D2C0 ★ Each \$0.30

KK846M D1C8 1/2 ★—(Case lots 250)

25 in ctn., 250 in std. pkg. Wt. pkg. 21 lbs.

PAULDING

Intermediate Grade

Pull chain, standard type. Porcelain Housing will fit box covers Nos. 1629A1, 1621A1, 1619A1, 1620 and 1624. Will also fit any standard brass shell socket.

(P360)

Each K845M D2C0 ★ Each \$0.30

KK845M D1C8 1/2 ★—(Case lots 250)

25 in ctn., 250 in std. pkg. Wt. pkg. 25 lbs.



EAGLE

Competitive Grade

Key Standard Type; Bakelite Housing for Replacement Purposes; can be used in Brass, Bakelite or Rubber Shells.

250 Watt—250 Volt

(4300)

Each K847M D1C3 1/2 Each \$0.20

KK847M D1C2 1/2—(Case lots 250)

25 in ctn., 250 in std. pkg. Wt. pkg. 17 lbs.



EAGLE

Competitive Grade

Push Thru Electrolier Size, Bakelite Housing; for Replacement Purposes; can be used in Brass, Nickel or Aluminum Shells.

(6601)

Each K848M D1C2 ★ Each \$0.18

KK848M D1C2 ★—(Case lots 250)

25 in ctn., 250 in pkg. Wt. pkg. 13 lbs.

STAR ★ DENOTES BEST SELLER

ADJUSTABLE SWIVEL SOCKETS

Listed by Underwriters Laboratories, Inc.



EAGLE

Competitive Grade

Permits Directing Beam of Projector Spot or Flood Light or Infra-Red Heat Lamp to any Desired Position. The Swivel is so Constructed that the Connecting Wire Leads Cannot Cross or Get Twisted; no Connecting Wires are Exposed; Brown Bakelite Housing.

(160A)

Each K827M D7C8 Each \$1.19

KK827M D7C0—(Case Lots 100)

25 in ctn., 100 in std. pkg. Wt. pkg. 24 lbs.

SOCKET ADAPTERS

Listed by Underwriters' Laboratories, Inc.

EAGLE

Competitive Grade



Made of black bakelite. This adapter can be inserted in standard pin type receptacles thereby changing a plug outlet to a screw outlet. Lamp bulb can then be inserted in open end.

600 Watts—250 Volts

Brass Metal Blades

Black Color
(738)

Each K894M D1C0 1/2 ★ Each \$0.15

KK894M D0C9 1/2 ★—(Case lots 250)

Twenty-five in ctn.

250 in case. Wt. case 21 lbs.

EDISON TO MOGUL ADAPTERS

EAGLE



Made of a One-Piece Combination Edison to Mogul Shell. No Soldered Connections to Fall Apart; Porcelain Interior Hard Fibre Sleeve Permits the Use of Mogul Base Lamps in Edison Medium Base Sockets. Over All Length 2 3/4 inches. Extends Bulb 1 1/4 inches from Socket.

(362)

Each K893M D5C0 Each \$0.75

KK893M D5C0—(Case lots 100)

10 in ctn., 100 in standard pkg.

Wt. pkg. 16 lbs.

SOCKET REDUCERS

Listed by Underwriters' Laboratories, Inc.
EAGLE




Made of Porcelain
Brass Ferrule
Mogul to Edison Medium
(332)

Each
K892M D2C1..... \$0.30
K892M D1C9—(Case lots 250)
25 in ctn., 250 in standard pkg.
Wt. pkg. 39 lbs.

WEATHERPROOF SOCKETS

EAGLE

Competitive Grade



Socket Made of All Rubber; 6 inch No. 14 Gauge Leads: One Black and One White Wire Stripped 1 inch for Easy Connection, Extended Lip Presses onto Glass of Bulb when Screwed into Socket; Makes Absolute Watertight Connection, Shade Holder Groove; Medium Base.

Each (E124) Each
K826M D1C5★..... \$0.25
K826M D1C4★—(Case Lots 200)
25 in ctn., 200 in standard pkg.
Wt. pkg. 30 lbs.

Sold Only in Full Cartons

EAGLE

Medium base, bakelite weather-proof socket, with pin type wire contacts, easily attached or removed. Center spring contact and socket prevents lamp from loosening, due to jars or vibrations. Ideal for outdoor decorative lighting or construction work. Equipped with special detachable guy wire suspension hook.



Each (732) Each
K829M D1C6½..... \$0.25
K829M D1C5—(Case Lots 250)
25 in ctn., 250 in standard pkg.
Wt. pkg. 24 lbs.

LAMP KITS

SNAP-IT

Converts Bottle, Jar, Vase or Jug into a Lamp

Kit includes socket with push through switch, 6 foot cord and three sizes of corks to fit most bottles and jugs.



Individually blister packed on card.

Each (J2063) Each
K852M X1D00..... \$1.50
Twenty-four in ctn. Wt. ctn. 8 lbs.

LAMP SOCKETS

Listed by Underwriters' Laboratories, Inc.
GENERAL ELECTRIC



Make old lamps modern looking and more attractive. Converts table lamps to use 3-way indirect light bulb for over-all-bright softer light with choice of three brightness levels—150, 100 or 50 watts. Easily installed in three simple steps with strong, safe connection.

Consists of lustrous ivory plastic socket with harp mounted on top. Moulded threads with spring contact. Screw nozzle enclosed in base of socket. Three way high-to-low switch with quarter turn action. Permanently attached 8 foot cord and quick clamp plug.

Less than Case Lots..... D1C8%
Lots of 5..... D2C8%
Case Lots..... D3C8%

Without Bulb

Each (2040/2) Each
K650M X1D37..... \$1.67
Lots of 5 X1D20
K650M X1D04—(Case Lots 25)
Five in ctn., 25 in standard pkg.
Wt. pkg. 18 lbs.

NOTE—Refer to Section 17—Page 24 for G. E. Lamp No. 50/150R/W for Use with the Above Lamp Socket.

LAMP ADAPTERS

NALCO



Designed to provide a practical reading and working light from any old style oil lamp

Flat wick type No. 2 standard oil lamp burner with threads which screw into the lamp. Equipped with cord and turn knob switch. Medium base.

Without Bulb

Each (2) Each
K853M X1D75..... \$2.65
Ten in ctn. Wt. ctn. 10 lbs.

LAMP FLASHERS

Listed by Underwriters' Laboratories, Inc.
EAGLE



SUPERIOR WINKER BUTTON

Button type. Fine thermostatic mechanism. Trouble free. For use with medium base sockets. Fifty to sixty-five flashes per minute.

60 Watts—110 Volts

Per Card Per Card
K1345M (1008) X2D30..... \$3.30
10 on display cd., 10 cds. in std. pkg.
Wt. std. pkg. 2½ lbs.

Sold Only in Full Cards

EAGLE

Regular Type Winker

14 to 18 flashes per minute. Over all length 2½ inches, extends lamp 1¼ inches from socket.

100 Watts—110 Volts
(475)

Each D3C5..... \$0.55
K1343M
25 in ctn., 250 in std. pkg. Wt. pkg. 18 lbs.

EAGLE

Bakelite Outlet Winker

14 to 16 Flashes per minute. For signs, Christmas lights, etc.

100 Watts—110-120 Volts
(471)



Each D2C7..... \$0.40
K1341M
25 in ctn., 250 in std. pkg. Wt. pkg. 18 lbs.

STAR ★ DENOTES BEST SELLER

WALL PLATE SHIELDS

KESSLER

Keeps walls clean around switch plate.

Made of heavy .015 gauge transparent acetate. Embossed to fit over any type wall plate and will fit firmly against wall.

Polished—Soil Proof



No. K995M



No. K997M

Size 5½x7 inches

(WS41)

Per Box	Type	Wt. box, ozs.	Each
K995M	X1D20★ 1 Gang Toggle	8	\$0.15
K997M	X1D20 Double Receptacle	8	.15



No. K999M

Size 7x9 inches

(WS61)

Per Box	Type	Wt. Box, ozs.	Each
K999M	X1D50 2 Gang Toggle	12	\$0.20

One in glassine bag, 12 in box

Sold Only in Full Boxes

LINEHAM & CO.



No. K1003M

Crystal clear embossed plastic. Non-inflammable. Easily installed over switch plates.

For Double Gang Toggle Plates

(110)

Per Carton	Weight Carton lbs.	Each
K1003M	X1D08	¾ \$0.20

One in glassine bag Twelve in ctn.

Sold Only in Full Cartons

WALL PLATES

ENGEL PLASTIC

Less than 12.....	D3C3½%
12 or more.....	D4C0%



Coat-of-Arms

For dens, master bedrooms, etc.

Size 6¼x4 inches

(301)

Each		Color	Each		Color	Each	
K1137M	D2C6	White	\$0.39	K1133M	D2C6	Ivory	\$0.39
12 or more	D2C3½			12 or more	D2C3½		
K1138M	D2C6	Yellow	.39	K1134M	D2C6	Black	.39
12 or more	D2C3½			12 or more	D2C3½		
K1139M	D2C6	Pink	.39				
12 or more	D2C3½						



Clown

For children's room or bedroom

Size—7x4½ inches

(312)

Each	Color	Each	Color	Each		
K1140M	D2C6	Pink	K1130M	D2C6	White	\$0.39
12 or more	D2C3½		12 or more	D2C3½		
K1141M	D2C6	Blue	K1132M	D2C6	Black	.39
12 or more	D2C3½		12 or more	D2C3½		

One in polyethylene bag with descriptive label
Twelve bags in box, Wt. box 1 lb.

Can Be Assorted for Quantity Prices

STAR ★ DENOTES BEST SELLER



Angel Fish

For Bathrooms.

Size—7x4½ inches

Assorted Trim

(16)

WALL PLATES

ENGEL PLASTIC

Less than 12... D3C3½%
12 or more... D4C0%



The Lyre

Decorative light switch plate that will add charm and beauty to the home. For use in living room, dining room and bedroom areas. Two-tone color combinations. Size 4x5½ ins.

(401)

Each	Color	Each
K1068M D2C6 12 or more D2C3½	Ivory	\$0.39
K1079M D2C6 12 or more D2C3½	Black	.39
K1084M D2C6 12 or more D2C3½	Mahogany	.39
K1088M D2C6 12 or more D2C3½	Gold	.39



Coffee Pot

Decorative light switch plate for use in kitchen and cooking area. Two-tone color combinations. Size 6x4½ inches.

(55)

Each	Color	Each
K1091M D2C6 12 or more D2C3½	White	\$0.39
K1097M D2C6 12 or more D2C3½	Yellow	.39



Swan

Decorative light switch plate for use in children's bedrooms, playrooms, etc. Two-tone color combinations. Size 6½x4½ inches.

(235)

Each	Color	Each
K1098M D2C6 12 or more D2C3½	White	\$0.39
K1119M D2C6 12 or more D2C3½	Black	.39
K1120M D2C6 12 or more D2C3½	Pink	.39
K1121M D2C6 12 or more D2C3½	Turquoise	.39

One in polyethylene bag with descriptive label.
Twenty-four bags in box. Wt. box 2 lbs.



Scottie

Decorative light switch plate for use in children's bedrooms, playrooms, etc. Size 8x4 inches.

(27)

Each	Color	Each
K1135M D2C6 12 or more D2C3½	Black	\$0.39
K1136M D2C6 12 or more D2C3½	White	.39



Elephant

Decorative light switch plate for use in children's bedrooms, play rooms, etc. Size 5½x4½ inches.

(185)

Each	Color	Each
K1063M D2C6 12 or more D2C3½	Pink	\$0.39
K1064M D2C6 12 or more D2C3½	Blue	.39
K1065M D2C6 12 or more D2C3½	White	.39

WEATHERPROOF COVER PLATES

ROYAL



Flip-Tite

Single-hinged "Flip" cover over each outlet. Makes any standard duplex receptacle weather-proof. Non-corroding plates, covers and springs.

Aluminum finish.

Complete with weatherproof mat and mounting screw.

Size 2½x4½ inches.

(412)

Each	Each
K1011M X1D40	\$1.90
KK1011M X1D30—(Case lots 50)	

One in box, 50 in ctn. Wt. ctn. 21 lbs.

WALL PLATES

ENGEL PLASTIC



The Lyre

Decorative light switch plate that will add charm and beauty to the home. For use in living room, dining room and bedroom areas. Two-tone color combinations. Size 4x5½ ins.

(401)

Each	Color	Each
K1068M D2C6 12 or more D2C3½	Ivory	\$0.39
K1079M D2C6 12 or more D2C3½	Black	.39
K1084M D2C6 12 or more D2C3½	White	.39
K1088M D2C6 12 or more D2C3½	Gold	.39



Coffee Pot

Decorative light switch plate for use in kitchen and cooking area. Two-tone color combinations. Size 6x4½ inches.

(55)

Each	Color	Each
K1091M D2C6 12 or more D2C3½	White	\$0.39
K1097M D2C6 12 or more D2C3½	Yellow	.39



Swan

Decorative light switch plate for use in children's bedrooms, playrooms, etc. Two-tone color combinations. Size 6½x4½ inches.

(235)

Each	Color	Each
K1098M D2C6 12 or more D2C3½	White	\$0.39
K1119M D2C6 12 or more D2C3½	Black	.39
K1120M D2C6 12 or more D2C3½	Pink	.39
K1121M D2C6 12 or more D2C3½	Turquoise	.39

One in polyethylene bag with descriptive label.
Twenty-four bags in box. Wt. box 2 lbs.



Scottie

Decorative light switch plate for use in children's bedrooms, playrooms, etc. Size 8x4 inches.

(27)

Each	Color	Each
K1135M D2C6 12 or more D2C3½	Black	\$0.39
K1136M D2C6 12 or more D2C3½	White	.39



Elephant

Decorative light switch plate for use in children's bedrooms, play rooms, etc. Size 5¼x4½ inches.

(185)

Each	Color	Each
K1065M D2C6 12 or more D2C3½	White	\$0.39

BAKELITE WALL PLATES

Listed by Underwriters' Laboratories, Inc.



EAGLE

SINGLE GANG
TOGGLE TYPE

(101C)

Each		Each
K954M D2C9★ Ivory Bakelite		\$0.15
KK954M D2C8½★ (Case lots 250)		

(101)

Each		Each
K953M D2C5½★ Brown Bakelite		.10
KK953M D0C5★ (Case lots 250)		

25 in ctn. 250 in case. Wt. case 16 lbs.

Sold Only in Full Cartons


SNAPIT

(1101)

Each		Each
K983M D1C1½★ Chrome Plate		.20
KK983M D1C1½★ (Case lots 250)		

Ten in ctn. 250 in case. Wt. case 27 lbs.

Sold Only in Full Cartons



EAGLE

TWO GANG
TOGGLE TYPE

(1011C)


Each		Each
K976M D1C8★ Ivory Bakelite		\$0.25

(1011)

Each		Each
K975M D1C3★ Brown Bakelite		.20

Ten in ctn. Wt. ctn. 1 lb.

Sold Only in Full Cartons

EAGLE
THREE GANG
TOGGLE
TYPE

(141V)

Each		Each
K971M D2C7½ Ivory Bakelite		\$0.45
KK971M D2C5½ (Case lots 180)		

(141B)

Each		Each
K969M D2C0 Brown Bakelite		.30
KK969M D1C8 (Case lots 180)		

180 in case. Wt. case 36 lbs.

Note—Bakelite Parts are Machine Wrapped
in Cellophane With Screws.

STAR ★ DENOTES BEST SELLER

BAKELITE WALL PLATES

Listed by Underwriters' Laboratories, Inc.




EAGLE

Single Gang

Single Receptacle
Type

(131V)

Each		Each
K987M	D0C9 Ivory Bakelite	\$0.15
	(104)	
K965M	D0C6½ Brown Bakelite	.10
	Twenty-five in ctn.	
	Wt. ctn. 1½ lbs.	



EAGLE

SINGLE GANG

DUPLEX RECEPTACLE
TYPE

(103C)

Each		Each
K962M	D0C9★ Ivory Bakelite	\$0.15
KK962M	D0C8½★ (Case lots 250)	
	(103)	
K960M	D0C6½★ Brown Bakelite	.10
KK960M	D0C6★ (Case lots 250)	
	25 in ctn. 250 in case. Wt. case 15 lbs.	
	Sold Only in Full Cartons	

SNAPIT

(1001)

K973M	D1C1½★ Chrome Plate	.20
KK973M	D1C1½★ (Case lots 250)	
	Ten in ctn. 250 in case. Wt. case 23 lbs.	
	Sold Only in Full Cartons	

BAKELITE WALL PLATES

Listed by Underwriters' Laboratories, Inc.




EAGLE

TWO GANG
TOGGLE AND
DUPLEX
RECEPTACLE
TYPE

(1013C)

Each		Each
K981M	D1C8 Ivory Bakelite	\$0.30
KK981M	D1C7 (Case lots 50)	
	(1013)	
K979M	D1C3 Brown Bakelite	.20
KK979M	D1C2 (Case lots 50)	
	Ten in ctn. 50 in std. pkg. Wt. pkg. 5 lbs.	



EAGLE

TWO GANG
DUPLEX FLUSH
RECEPTACLES

(19161)

Each		Each
K991M	D1C8 Ivory Bakelite	\$0.30
KK991M	D1C8 (Case lots 50)	
	(1916)	
K989M	D1C3 Brown Bakelite	.20
KK989M	D1C3 (Case lots 50)	
	Twenty-five in ctn. 50 in case. Wt. case 5 lbs.	

WALL PLATE SCREWS

SNAPIT



Bronze plated, for brown color wall plates.

(2500)

Per Bag		Each
K889M	D3C2	\$0.01
	One hundred in bag. Wt. bag 8 ozs.	
	Sold Only in Full Bags	

Chrome plated, for use with chrome finish, mirror glass or ivory colored plates.

(2500N)

Each		Each
K890M	D3C2	\$0.01
	One hundred in bag. Wt. bag ¼ lb.	
	Sold Only in Full Bags	

FLUSH RECEPTACLES

Listed by Underwriters' Laboratories, Inc.



EAGLE

Approved for R. E. A. Work
T-Slot

A high quality, thoroughly tested device for heavy duty service and endurance. Heavy sectioned brown bakelite base. Double grip contacts for parallel or tandem blades. Strap underslung of heavy gauge rust proofed steel with wide plaster ears for better wall alignment. Fits standard Duplex wall plates and box covers. Extra large binding screws for easier and more secure wiring.

15 Amperes—125 Volts

10 Amperes—250 Volts

(50001)

Each		Each
K915M	D2C8★ Ivory Bakelite	\$0.45
KK915M	D2C6½★ (Case lots 100)	
	Ten in ctn. 100 in case. Wt. case 20 lbs.	
	Sold Only in Full Cartons	

(5000)

K914M	D2C5★ Brown Bakelite	.40
KK914M	D2C3½★ (Case lots 100)	
	Ten in ctn. 100 in case. Wt. case 20 lbs.	
	Sold Only in Full Cartons	

LEVITON

Approved for R. E. A. Work

T-Slot



This new, T-slotted, duplex convenience outlet features sturdy, one-piece phenolic construction, heavily sectioned with wide, break-off plaster ears. Special bronze contacts provide double grip for parallel or tandem blades. Meets Federal specifications.

15 Amperes—125 Volts

10 Amperes—250 Volts

(2421)

Each		Each
K923M	D2C3★ Ivory Bakelite	\$0.35
KK923M	D2C1★ (Case lots 200)	
	Ten in ctn. 200 in case. Wt. case 37 lbs.	
	Sold Only in Full Cartons	

(242)

K912M	D2C0★ Brown Bakelite	.30
KK912M	D1C8★ (Case lots 200)	
	Ten in ctn. 200 in case. Wt. case 37 lbs.	
	Sold Only in Full Cartons	

NOTE—All Bakelite Parts are Machine Wrapped in Cellophane with Screws

STAR ★ DENOTES BEST SELLER

FLUSH RECEPTACLES

Listed by Underwriter's Laboratories, Inc.

GENERAL ELECTRIC

Pressure-Lock Terminals. Use No. 14, No. 12, or No. 10 Awg wire—protected from dust and dirt with no exposed current-carrying parts to short or are in outlet box. No binding screws to tighten or wire loops to bend.

Double Terminals. Two ground and two line terminals allow continuous wiring without splicing, soldering and taping. Break off plaster ears.

15 Amperes—125 Volts

10 Amperes—250 Volts

Each (GE4022/2) Each
K623M Ivory color \$0.40

Less than carton lots D2C5

Full carton lots D2C2

KK623M—Standard
package lots 100 (D1C9)

(GE4022/1)

K618M Brown color .30

Less than carton lots D2C1

Full carton lots D1C9

KK618M—Standard
package lots (100) D1C5½

Ten in ctn. One hundred in std. pkg. Wt. 16 lbs.

EAGLE

Approved for R. E. A. Work

Competitive Grade

A New Improved All Bakelite Receptacle with Plaster Ears and Molded Bakelite Back. Scientifically Designed; Phosphor Bronze Contacts Totally Enclosed; Dust Proof; Shallower in Construction than Other Makes Leaving Additional Room for Surplus Wire and Joints; Easy Finding Slots.

15 Amperes—125 Volts

10 Amperes—250 Volts

Each (736V) Each
K911M D1C4½★—Ivory Bakelite \$0.25

KK911M D1C3½★—(Case Lots 250)

(736B)

K910M D1C2★—Brown Bakelite .20

KK910M D1C1★—(Case Lots 250)

Ten in ctn. 250 in case
Wt. case 35 lbs.

Sold Only in Full Cartons

FLUSH RECEPTACLES

Listed by Underwriters' Laboratories, Inc.

EAGLE

Approved for R. E. A. Work
Competitive Grade

A Well Made Brown Bakelite Duplex Receptacle with Self Finding Slots Mounted on a Sprayed Aluminum Heavy Gauge Steel Plate.



15 Amperes—125 Volts

10 Amperes—250 Volts

(146/4)

Each Each

K905M D2C0★ For 4-inch Box . . . \$0.30

KK905M D1C8★—(Case lots 100)

Ten in ctn. 100 in case. Wt. case 33 lbs.

(146/3)

K904M D1C9 For 3½-inch Box30

KK904M D1C7—(Case lots 100)

Ten in ctn. 100 in case. Wt. case 27 lbs.

OUTLET PROTECTORS

BURLINGTON



SAF-GARD

Protects electrical outlets and prevents serious injury and shock to children. Can be removed only by adults.

Attractive small bakelite cap with two prongs to cover outlet completely.

5 on a Card

D4C0%

Per Card

Per Card

K928M D1C5★ (514I) Ivory \$0.25

K927M D1C5★ (514B) Brown .25

Twelve cards in display box. Wt. box 1 lb.

We Will Not Break Cards

STAR ★ DENOTES BEST SELLER

WEATHERPROOF RECEPTACLES

Listed by Underwriters' Laboratories, Inc.

EAGLE



A two-wire duplex weather-proof receptacle with screw covers. Complete with .040 brass, aluminum finish plate. Will fit standard switch box.

15 Amperes—125 Volts
10 Amperes—250 Volts

(98)

Each	Each
K902M X1D75.....	\$2.65
KK902M X1D75—(Case lots 50)	

One in box, 50 in ctn. Wt. ctn. 23 lbs.

EAGLE



Two-wire, single receptacle. Flush type with screw cover. Complete with .040 brass, aluminum finish plate. Will fit standard switch box.

15 Amperes—125 Volts
10 Amperes—250 Volts

(99)

Each	Each
K903M X1D05.....	\$1.60
KK903M X1D05—(Case lots 50)	

One in box, 50 in ctn. Wt. ctn. 21 lbs.

WEATHERPROOF COVER PLATES

ROYAL



Flip-Tite

Single-hinged "Flip" cover over each outlet. Makes any standard duplex receptacle weather-proof. Non-corroding plates, covers and springs.

Aluminum finish.

Complete with weatherproof mat and mounting screw.

Size 2 3/4 x 4 1/2 inches.

(412)

Each	Each
K1011M X1D40.....	\$1.90
KK1011M X1D30—(Case lots 50)	

One in box, 50 in ctn. Wt. ctn. 21 lbs.

FLUSH RECEPTACLES

Listed by Underwriters' Laboratories, Inc.

HOWARD RECEPTON



Safe—

A factory assembled completely enclosed unit with beautiful mahogany plastic face plate.

Easy—

Installation takes minutes instead hours. The Recepton requires only a 1-inch hole.

Convenient—

Install Receptons every place an electric outlet is wanted.

Complete—

Supplied with 18-inch, 14 gauge, two conduct or, shielded, non-metallic cable, mounting screws and installation instructions.

15 Amperes—125 Volts
10 Amperes—250 Volts

Brown color

Each	Each
K920M D5C5.....	\$0.79
KK920M D5C0—(Case lots 12)	

Twelve in ctn. Wt. ctn. 5 lbs.

ELECTRIC RANGE RECEPTACLES

Listed by Underwriter's Laboratories, Inc.

EAGLE



Flush type, designed to fit 4 inch and 4 1/8 inch boxes with 3/4 inch plaster cover made of brown bakelite solidly constructed on welded steel cradle.

3 Wire Polarized

50 Amperes—250 Volts

(122B)

Each	Each
K602M D9C5.....	\$1.50

One in ctn. 25 in case. Wt. 10 lbs.

ELECTRIC DRYER RECEPTACLES

Listed by Underwriter's Laboratories, Inc.

EAGLE



Flush type, designed to fit 4 inch and 4 1/8 inch boxes with 3/4 inch plaster cover made of brown bakelite solidly constructed on welded steel cradle.

3 Wire Polarized

50 Amperes—250 Volts

(168B)

Each	Each
K400M D9C5.....	\$1.50

One in ctn. 25 in case. Wt. 16 lbs.

FLUSH RECEPTACLE PLATES

EAGLE



Heavy weight brown bakelite, scientifically ribbed to prevent breakage and warpage. Will fit standard range and dryer flush receptacles. Individually cellophane wrapped with screws.

(171B)

Each	Each
K988M D3C5.....	\$0.55

Ten in ctn. 50 in case. Wt. 6 lbs.

**ELECTRIC RANGE
RECEPTACLES**

Listed by Underwriters' Laboratories, Inc.

GENERAL ELECTRIC

Made of black textolite material. Solderless connections. Cable clamp. Fourth wire grounding provision. Pryout knockouts for conduit or cable entrance through either back or bottom of device, an economical means of surface installation, especially for old work.

50 Amperes—250 Volts**Surface Type
(GE3000)**

Each	Each
K592M	\$2.31

Less than carton lots **X1D89**Full carton lots **X1D66****KK592M X1D43**—(Standard package lots 10)

Two in ctn. 10 in standard pkg

Wt. pkg. 12 lbs.

EAGLE

Black bakelite housing. Special "slip-lock" pressure terminals. Protected wiring terminals. Combination knockouts $\frac{3}{4}$ and 1 inch at one end and back. Easy to get at cable clamp and handy to transfer from the end to the bottom knockout. Length $4\frac{1}{4}$ inches. Width $2\frac{3}{4}$ inches. Depth $2\frac{3}{4}$ inches.

(112)

Each	Each
K919M X1D08 ★.....	\$1.65

KK919M X1D00★—(Case lots 10)

One in box. 10 in ctn. Wt. ctn. 10 lbs.

STAR ★ DENOTES BEST SELLER**ELECTRIC DRYER
RECEPTACLES**

Listed by Underwriters' Laboratories, Inc.

EAGLE

Black bakelite housing. Special "slip-lock" pressure terminals. Protected wiring terminals. Combination knockouts $\frac{3}{4}$ and 1 inch at one end and back. Easy to get at cable clamp and handy to transfer from the end to the bottom knockout. Length $4\frac{1}{4}$ inches. Width $2\frac{3}{4}$ inches. Depth $2\frac{3}{4}$ inches. "L" shaped grounding slot.

(125B)

Each	Each
K397M X1D08	\$1.65
KK397M X1D00 —(Case lots 10)	

One in box. 10 in ctn. Wt. ctn. 10 lbs.

**ELECTRIC DRYER
CORD SETS**

Listed by Underwriters' Laboratories, Inc.

EAGLE

Made especially for use with K397M Electric Dryer Receptacles. Black bakelite cap. Length 4 feet overall.

30 Amperes—250 Volts**3 No. 10 Conductors****(130)**

Each	Each
K398M X2D00	\$3.00
KK398M X1D80 —(Case lots 10)	

Ten in ctn. Wt. ctn. 15 lbs.

GROUNDING WIRING DEVICES

FLUSH RECEPTACLES

Listed by Underwriters' Laboratories, Inc.

EAGLE

New 250 Volt ground-devices for use with equipment made in accordance with new National Electrical Code. Heavy duty tandem double blade contacts. U-type ground.

15 Amperes—250 Volts



Single Type
Ivory Bakelite

(816V)

Each		Each
K388M	D3C7½	\$0.60
KK388M	D3C5—(Case lots 100)	

Brown Bakelite
(816B)

K967M	D3C3½	\$0.55
KK967M	D3C1½—(Case lots 100)	

Ten in ctn. 100 in case. Wt. case 16 lbs.

EAGLE

For use on 125 Volt grounding systems with equipment made in accordance with new National Electrical Code. Will also accommodate regular and polarized 2 wire caps. Heavy duty double blade contacts. Parallel slots are polarized. U-type ground.

15 Amperes—125 Volts



Single Type
Brown Bakelite
(817B)

Each		Each
K812M	D3C3½	\$0.55
KK812M	D3C1½—(Case lots 100)	

Ten in ctn. 100 in case. Wt. case 16 lbs.


FLUSH RECEPTACLES

Listed by Underwriters' Laboratories, Inc.

EAGLE

New 250 Volt ground-devices for use with equipment made in accordance with new National Electrical Code. Heavy duty tandem double blade contacts. U-type ground.

15 Amperes—250 Volts



Duplex Type
Brown Bakelite


Each		Each
K390M	D4C7	\$0.72
KK390M	D4C3½—(Case lots 100)	

Ten in ctn. 100 in case. Wt. case 22 lbs.

EAGLE

For use on 125 Volt grounding systems, with equipment made in accordance with new National Electrical Code. Will also accommodate regular and polarized 2 wire caps. Heavy duty double blade contacts. Parallel slots are polarized. U-type ground.

15 Amperes—125 Volts



Duplex Type
Brown Bakelite

Each		Each
K835M	D4C7	\$0.72
KK835M	D4C3½—(Case lots 100)	

Ten in ctn. 100 in case. Wt. case 22 lbs.

GROUND ADAPTERS

Listed by Underwriters' Laboratories, Inc.

EAGLE

For connecting a 2-wire system to a 3-wire new type parallel blade and "U" shaped ground. This device has parallel polarized prongs and polarized slots.

Furnished with a 3" green grounding lead with a lug easily attached to screw of wall plate or cover.

Double wipe contacts, self finding slots.



15 Amperes—125 Volts

Black Bakelite

Each		Each
K396M	D2C0½★	\$0.32
KK396M	D1C9★—(Case lots 50)	

Ten in ctn. 50 in case. Wt. case 8 lbs.

Sold Only in Full Cartons

GROUNDING WIRING DEVICES

FLUSH RECEPTACLES

Listed by Underwriters' Laboratories, Inc.

EAGLE



New 250 Volt grounding systems with equipment made in accordance with new **National Electrical Code**. Equipped with Single Receptacle

mounted on heavy gauge, 4-inch aluminum sprayed steel plate. Heavy duty tandem double blade contacts. U-type ground.

15 Amperes—250 Volts

Single Type

Brown Bakelite

(879)

Each		Each
K395M	D5C4	\$0.80
KK395M	D4C9—(Case lots 50)	

Ten in ctn. 50 in case. Wt. case 18 lbs.

EAGLE



For 125 Volt grounding systems with equipment made in accordance with new **National Electrical Code**. Equipped with Single Receptacle mounted on heavy gauge 4-inch aluminum sprayed steel plate. Parallel slots are polarized. U-type ground.

15 Amperes—125 Volts

Single Type

Brown Bakelite

(859)

Each		Each
K393M	D5C4	\$0.80
KK393M	D4C9—(Case lots 50)	

Ten in ctn. 50 in case. Wt. case 18 lbs.

FLUSH RECEPTACLES

Listed by Underwriters' Laboratories, Inc.

EAGLE



New 250 Volt grounding systems, with equipment made in accordance with new **National Electrical Code**. Equipped with Duplex Receptacles mounted on heavy gauge 4-inch aluminum sprayed

steel plate. Heavy duty tandem double blade contacts. U-type ground.

15 Amperes—250 Volts

Duplex Type

Brown Bakelite

(889)

Each		Each
K394M	D6C3	\$0.95
KK394M	D5C8—(Case lots 50)	

Ten in ctn. 50 in case. Wt. case 22 lbs.

FLUSH RECEPTACLES

Listed by Underwriters' Laboratories, Inc.



EAGLE

For use with air conditioners, fans, etc. 3-wire, cold molded body, black color. Polarized, side wired, heavy duty type. Uses K965M Wall Plate.

20 Amperes—250 Volts

(23)

Each		Each
K808M	D9C5	\$1.45
KK808M	D9C5—(Case lots 100)	

Ten in ctn. 100 in case. Wt. case 35 lbs.



EAGLE

For use with air conditioners, fans, etc. 3-wire black bakelite body. Polarized. Side wired. Uses K965M Wall Plate.

15 Amperes—125 Volts

10 Amperes—250 Volts

(103)

Each		Each
K811M	D9C5	\$1.45
KK811M	D8C5—(Case lots 100)	

Ten in ctn. 100 in case. Wt. case 18 lbs.



LEVITON

For use with Air Conditioners, Fans, Tools, etc. 3-wire. Black bakelite body. Polarized. Side wired, mounted on a 4-inch steel plate.

20 Amperes—250 Volts

(5034)

Each		Each
K387M	X1D10	\$1.65
KK387M	X1D03—(Case lots 100)	

Ten in ctn. 100 in case. Wt. case 37 lbs.

GROUNDING WIRING DEVICES

PLUG CAPS

Listed by Underwriters' Laboratories, Inc.



EAGLE

Armored cap with cord grip. For new 3-wire grounding devices with U-type grounding blades; with parallel brass blades.

15 Amperes—125 Volts

(5009)

Each		Each
K385M	D3C6	\$0.55
KK385M	D3C3—(Case lots 100)	

Ten in ctn. 100 in case. Wt. case 13 lbs.



EAGLE


Rubber handle. For new 3-wire grounding devices with U-type grounding blades; with parallel brass blades.

15 Amperes—125 Volts

(5007)

Each		Each
K384M	D3C0	\$0.45
KK384M	D2C7—(Case lots 100)	

Ten in ctn. 100 in case. Wt. case 10 lbs.



EAGLE

Cord Hole: 1/2"

Overall O.D.—1 1/16"

Heavy duty brown bakelite with a pleasing design. Not armored. Will take 3 No. 14 wires. Fibre insulating washer furnished. Parallel brass blades.

15 Amperes—125 Volts

(847)

Each		Each
K1007M	D2C3	\$0.35
KK1007M	D2C1—(Case lots 100)	

Ten in ctn. 100 in case. Wt. case 7 lbs.

PLUG CAPS

Listed by Underwriters' Laboratories, Inc.



EAGLE

Armored cap with cord grip. For new 3-wire grounding devices with U-type grounding blades; with tandem brass blades.

15 Amperes—250 Volts

(866)

Each		Each
K1012M	D3C6	\$0.55
KK1012M	D3C3—(Case lots 100)	

Ten in ctn. 100 in case. Wt. case 13 lbs.



EAGLE

Three wire polarized armored grip cap. Cord hole .250-.560-inch. For use with cord connectors like K1014M.

10 Amperes—250 Volts

15 Amperes—125 Volts

(F31)

Each		Each
K1013M	D4C2	\$0.65
KK1013M	D4C0—(Case lots 100)	

Ten in ctn. 100 in standard pkg. Wt. pkg. 12 lbs.

PLUG CAPS

Listed by Underwriters' Laboratories, Inc.



EAGALOK

Interchangeable with all standard "Twist Lock" locking devices. Armored black bakelite. Brass blades. Just turn to lock, turn to unlock.

Three wire with adjustable cord clamp.

20 Amperes—250 Volts—Three Wire

(875)

Each		Each
K1047M	D8C5	\$1.20
KK1047M	D7C8—(Case lots 50)	

Ten in ctn. 50 in case. Wt. case 11 lbs.

15 Amperes—125 Volts—Three Wire

10 Amperes—250 Volts

(873)

Each		Each
K1033M	D6C0	\$0.90
KK1033M	D5C5—(Case lots 50)	

Ten in ctn. 50 in case. Wt. case 8 lbs.

GROUNDING WIRING
DEVICES

CORD CONNECTORS

Listed by Underwriters' Laboratories, Inc.

EAGLE

Cord Hole: .600
Overall O.D.—1½"

This connector is very sturdily built and the easiest to wire. Grounding terminal is connected automatically to the armor in the cap by a novel spring loaded rivet when connector is wired. Made with heavy duty brown bakelite.

15 Amperes—125 Volts

(887)

Each		Each
K131M	D8C2	\$1.25
KK131M	D7C5—(Case lots 100)	

Ten in ctn. 100 in case. Wt. case 18 lbs.

EAGLE



Three wire armored grip connectors. Bakelite body. Cord hole .250-.500-inch. For use with plug caps like K1013M and K823M.

10 Amperes—250 Volts

15 Amperes—125 Volts

(F42)

Each		Each
K1014M	D6C7	\$1.00
KK1014M	D6C4—(Case Lots 50)	

Ten in ctn. 50 in standard pkg.

Wt. pkg. 10¾ lbs.

CONVENIENCE OUTLETS

Listed by Underwriters' Laboratories, Inc.
ACADEMY

Illustration shows ease and simplicity of assembly.



Illustration shows attractive carton for counter use.

Electricity where needed in seconds!
Another first for Academy... a three-way automatic outlet.Exclusive selling features in the ACAD-
EMY 3-way automatic outlet.
Attached in seconds—

Just open, insert wire, close and contact is made.

No shocks or shorts—
Insulation never removed.Fast Selling—
Extra Profits—For added sales.
Crush proof—
Strong construction with urea plastic.Colors—
Available in brown or pearl, in a beautiful translucent lustre, to please everyone's taste.

Assortment consists of:

	Retail value	
	Each	Total
12 only—Pearl color.....	\$0.25	\$3.00
12 only—Brown color.....	.25	3.00
Total retail value.....	\$0.00	
Dealer's cost.....	\$4.00	
Dealer's profit.....	\$2.00	

(A410)

Per Asst.
K732M X4D00

Wt. asst. 5 lbs.

We do not break assortments

OPEN STOCK

Each	Color	Wt. ctn.,	Each
K730M D1C7 (A400)	Pearl	5	\$0.25
K731M D1C7 (A405)	Brown	5	.25

Twenty-four of one color in display ctn

CONVENIENCE OUTLETS

Listed by Underwriters' Laboratories, Inc.
EAGLE

This is the very latest in table and wall taps. A new distinctive Eagle streamline design makes it attractive for either table or wall use. Size 2 1/4 x 1 1/4 x 1/2 inches, containing 3 outlets to receive 3 flat caps or 2 standard round caps. Fastens to the wall by a single screw. A steel plate is fastened to the outside of the press-board cover for sturdy backing.

Now equipped with improved terminals sturdily fastened.

15 Amperes—125 Volts

10 Amperes—250 Volts

Ivory Bakelite

Each		Each
K734M D1C7 (746V).....		\$0.25
KK734M D1C6—(Case Lots 200)		

Brown Bakelite

K733M D1C4★ (746B).....	.20
KK733M D1C3★—(Case Lots 300)	

Twenty in display ctn.
200 in case. Wt. case 30 lbs.

SNAPIT

Not Listed by Underwriters' Laboratories, Inc.



"Three In Line" to be Mounted on Wall or Baseboard with Wood Screws. Will Accommodate Three Flat or Round Standard Attachment Caps.

15 Amperes—125 Volts

10 Amperes—250 Volts

Ivory Bakelite

Each		Each
K737M D2C6 (1584C).....		\$0.30
KK737M D2C4—(Case Lots 100)		

Brown Bakelite

K736M D2C2★ (1584).....	.35
KK736M D2C0★—(Case Lots 100)	

Ten in ctn. 100 in case. Wt. case 20 lbs.

SNAPIT



TINY TRIPLE OUTLETS

Two and One-Half inches Long; 1 1/4 inches Wide; 3/8-inch High; Will Accommodate Three Flat Grip Caps or Two Round Caps. To be Mounted on Wall or Baseboard with Wood Screws.

15 Amperes—125 Volts

10 Amperes—250 Volts

Ivory Bakelite

Each		Each
K739M D1C7 1/2 (1594C).....		\$0.25
KK739M D1C6—(Case Lots 100)		

Brown Bakelite

K738M D1C4 (1594).....	.20
KK738M D1C3—(Case Lots 100)	

Ten in ctn. 100 in case. Wt. case 10 lbs.

STAR ★ DENOTES BEST SELLER

CONVENIENCE OUTLETS

Listed by Underwriters' Laboratories, Inc.



EAGLE

A Triple Convenience Outlet which Actually Affords Three Outlets in One; Beautifully Designed and Sturdily Constructed.

Quick and Easy to Connect, No Stripping of Wires Required; Just One Screw to Fasten Outlet and Wires; Complete with Mounting Screw.

Brown Bakelite

(759B)

Each		Each
K735M D1C3.....		\$0.19
KK735M D1C2—(Case lots 500)		

Individually carded, 25 in ctn.

500 in standard pkg. Wt. pkg. 30 lbs.

PULL CHAIN BOX COVERS

Listed by Underwriters' Laboratories, Inc.



LEVITON
Competitive Grade
Round Base, Two Piece Porcelain Pull Receptacle; with Convenience Outlet in Base; with Shade Holder Groove; with Short Chain and 3 feet of Cord; Medium Base.

Lampholder Rated—250 Watts—250 Volts

Outlet Rated { 15 Amperes—125 Volts
10 Amperes—250 Volts
For 4 or 3 1/4 inch Octagon Boxes

(9716CX)

Each K1051M D4C5★ Each \$0.69
6-K1051M D4C1 1/2★ (Case lots 50)

One in ctn. 50 in case. Wt. case 44 lbs.



LEVITON
Intermediate Grade
Round Base, Two Piece Porcelain Pull Receptacle with Shade Holder Groove; with Short Chain and 4 feet of Cord; Medium Base.

250 Watts—250 Volts

For 4 or 3 1/4 inch Octagon Boxes

(1629A1)

Each K1049M D3C9★ Each \$0.50
6-K1049M D3C5 1/2★ (Case lots 50)

One in ctn. 50 in case. Wt. case 35 lbs.



PAULDING
Intermediate Grade
Round Base, Two Piece Porcelain Pull Receptacle; with Shade Holder Groove, with Short Chain and 4 feet of Cord; Medium Base.

250 Watts—250 Volts

For 4 inch Octagon Boxes

(1619A1)

Each K1038M D3C7 Each \$0.55
KX1038M D3C4 (Case lots 50)

One in ctn. 50 in case. Wt. case 34 lbs.

KEYLESS BOX COVERS

Listed by Underwriters' Laboratories, Inc.



LEVITON
Competitive Grade
Round Base, One Piece Porcelain Keyless Receptacle with Open Terminals; with Shade Holder Groove; Medium Base.

600 Watts—250 Volts
For 4 or 3 1/4 inch Octagon Boxes
(9875X)

Each K1052M D2C3★ Each \$0.35
KX1052M D2C0 1/2★ (Case lots 50)
One in ctn. 50 in case. Wt. case 33 lbs.

CLEAT RECEPTACLES

Listed by Underwriters' Laboratories, Inc.



LEVITON
Competitive Grade
Porcelain, with Open Terminals; Pony Cleat Base; for Signs and Surface Wiring; Medium Base.

600 Watts—250 Volts
(9062)

Each K895M D1C3★ Each \$0.20
KX895M D1C2★ (Case lots 250)
Ten in ctn. 250 in case. Wt. case 48 lbs.
Sold Only in Full Ctns.



LEVITON
Competitive Grade
TWO-PIECE CONCEALED

Porcelain, Diameter of Base 2 1/4 inches; Made of White Porcelain; for Signs and Surface Wiring; Medium Base.

600 Watts—250 Volts
(9880)

Each K899M D1C9 Each \$0.29
KX899M D1C7 1/2★ (Case lots 200)
Ten in ctn. 200 in case. Wt. case 59 lbs.

PULL CHAIN RECEPTACLES

Listed by Underwriters' Laboratories, Inc.



EAGLE
Competitive Grade
Two Piece Shallow Screw Ring Type; Rubber Gasket; Screw Terminals; with Short Chain and 4 feet of Cord; Medium Base; 1 inch Body.

(9814)

Each K898M D2C5★ Each \$0.39
KX898M D2C3★ (Case lots 100)
Ten in ctn. 100 in case. Wt. case 29 lbs.
Sold Only in Full Ctns.

STAR ★ DENOTES BEST SELLER

SIGN RECEPTACLES

Listed by Underwriters' Laboratories, Inc.



LEVITON
Competitive Grade
Two-Piece Porcelain; Shallow Screw Ring Type; Rubber Gasket; Screw Terminals; Medium Base; 3/4-inch Body.

600 Watts—250 Volts

(9350)

Each K897M D1C4 1/2 Each \$0.25
KX897M D1C3 1/2 (Case lots 250)

Ten in ctn. 250 in case. Wt. case 39 lbs.

ELECTRIC HEATER RECEPTACLES

Listed by Underwriters' Laboratories, Inc.



EAGLE
IMPROVED ENCLOSED
2-PIECE HEATER RECEPTACLE

Terminals are completely enclosed and polarized. Glazed porcelain ring, screws perfectly into body. Has New Double Center Contact. All screws staked. Back cover sprayed old gold.

600 Watts—250 Volts

(602)

Each K900M D2C2 Each \$0.35
KX900M D2C0 (Case lots 100)

Ten in ctn. 100 in standard pkg. Wt. pkg. 29 lbs.

PORCELAIN ROSETTES

Listed by Underwriters' Laboratories, Inc.



LEVITON
Fuseless Two-Piece
Porcelain for drop cords; concealed bases.

600 Watts—250 Volts

(9065)

Each K891M D2C4 Each \$0.39
KX891M D2C2 (Case lots 200)

Ten in ctn. 200 in case. Wt. case 65 lbs.

ENTRANCE SWITCHES

Listed by Underwriters' Laboratories, Inc.

LEVITON

Competitive Grade



**Double Pole
Main Line**

Porcelain base $4\frac{1}{2}$ inches long, 3 inches wide; for plug type fuses; spade handle.

Two Pole—30 Amperes—125

Fusible Bottom

(9161)

Per Box (2) Each
K778M X1D55★ \$1.20

Per Case
KK778M X34D75★—(Case lots 25 boxes)
Two in box, 25 boxes in case, wt. case 53 lbs.

Sold Only in Full Boxes

PLUG FUSE CUT OUT

Listed by Underwriters' Laboratories, Inc.

LEVITON



Two-Wire-Main Line

Medium base, glazed porcelain, open screw type terminals. Fused neutral.

30 Amperes—125 Volts

(8719)

Each Each
K1060M D3C5 \$0.55

KK1060M D3C5—(Case lots 50 only)
Ten in ctn, 50 in case, Wt. case 27 lbs.

BATTERY KNIFE SWITCHES

Listed by Underwriters' Laboratories, Inc.

LEVITON



**Single Pole
Single Throw**

Porcelain base $1\frac{1}{2}$ x $3\frac{1}{4}$ inches; supporting screws spaced $2\frac{1}{16}$ inches on centers.

25 Amperes—125 Volts

(9912)

Each Each
K780M D1C9 \$0.30
KK780M D1C7 $\frac{1}{2}$ —(Case lots 100 only)
Ten in ctn, 100 in case, Wt. case 19 lbs.



**Single Pole
Double Throw**

Porcelain base $1\frac{1}{2}$ x $3\frac{1}{4}$ inches; supporting screws spaced $1\frac{1}{2}$ inches on centers.

25 Amperes—125 Volts

(9914)

Each Each
K782M D2C5 $\frac{1}{2}$ \$0.40
KK782M D2C3 $\frac{1}{2}$ —(Case lots 100 only)
Ten in ctn, 100 in case, Wt. case 28 lbs.



**Double Pole
Single Throw**

Porcelain base $2\frac{1}{2}$ x $3\frac{1}{4}$ inches; supporting screws spaced 2 inches on centers.

25 Amperes—125 Volts

(9913)

Each Each
K781M D3C2 \$0.50
KK781M D3C0—(Case lots 100 only)
Ten in ctn, 100 in case, Wt. case 31 lbs.



**Double Pole
Double Throw**

Porcelain base $2\frac{1}{2}$ x $3\frac{1}{4}$ inches; supporting screws spaced 2 inches on center.

25 Amperes—125 Volts

(9915)

Each Each
K783M D4C3 \$0.65
KK783M D4C0—(Case lots 100 only)
Ten in ctn, 100 in case, Wt. case 42 lbs.

CURRENT TAPS

Listed by Underwriters' Laboratories, Inc.

EAGLE

Competitive Grade

THREE-WAY WITH PULL CHAIN



Two-piece bakelite. Two pin and one screw outlet. Pull chain controls center outlet. Other outlets are always "live". Screw outlet threaded for shade holder.

Bottom Outlet—250 Watts—250 Volts

Side Outlets—600 Watts—250 Volts

Each Color Each
K932M D2C7 (718V) Ivory \$0.40
KK932M D2C5—(Case lots 200)
K931M D2C3★ (718B) Brown .35
KK931M D2C1 $\frac{1}{2}$ ★—(Case lots 200)
Ten in ctn, 200 in case, Wt. case 29 lbs.

Sold Only in Full Cartons

EAGLE

Competitive Grade

THREE-WAY KEYLESS CURRENT TAPS



Two-piece plug made of bakelite. Two pin and one screw outlet. Screw outlet threaded for shade holder.

600 Watts—250 Volts

(715B)

Each Color Each
K930M D1C4 $\frac{1}{2}$ ★ Brown \$0.25
KK930M D1C3 $\frac{1}{2}$ ★—(Case lots 200)
Ten in ctn, 200 in case, Wt. case 24 lbs.

Sold Only in Full Cartons

LAMP PLUGS

Listed by Underwriters' Laboratories, Inc.

EAGLE

Competitive Grade

TWO-WAY TWIN



Two-piece plug made of bakelite, screw outlets.

600 Watts—250 Volts

(700B)

Each Color Each
K929M D1C5 $\frac{1}{2}$ ★ Brown \$0.25
KK929M D1C4 $\frac{1}{2}$ ★—(Case lots 200)
Ten in ctn, 200 in case, Wt. case 22 lbs.

Sold Only in Full Cartons

STAR ★ DENOTES BEST SELLER

ATTACHMENT PLUG BASES

Listed by Underwriters' Laboratories, Inc.
GENERAL ELECTRIC



These are heavy duty plug bases; with double "T" slots they are large sturdy devices of moulded compound.

10 Amperes—250 Volts

15 Amperes—125 Volts

(GE3293)

Each Each
K624M \$0.68

Less than carton lots D5C6

Full carton lots D4C9

KK624M—Standard

package lots (100) D4C2

Ten in ctn. 100 in standard pkg.
Wt. pkg. 11 lbs.



Brown texolite body. One wide and one narrow slot provide polarity feature when used with polarity caps.

660 Watts—250 Volts

(GE2621)

Each Each
K578M \$0.17½

Less than carton lots D1C4★

Full carton lots D1C2★

KK578M—Standard

package lots (250) D1C0½★

Twenty-five in ctn. 250 in standard pkg.
Wt. pkg. 12 lbs.

EAGLE

Beautiful new design, sturdily constructed with self-finding sets to accommodate plug caps. Fits all parallel blade caps. Made of bakelite material.

660 Watts—250 Volts

Brown Bakelite

(758)

Each Each
K1036M D0C6★ \$0.10

KK1036M D0C5½★—(Case lots 250)

Twenty-five in ctn. 250 in standard pkg.
Wt. pkg. 9 lbs.

Sold Only in Full Cartons

ATTACHMENT PLUG CAPS

Listed by Underwriters' Laboratories Inc.
ACADEMY



Illustration shows ease and simplicity of assembly



Illustration shows attractive carton for counter use

**Simpler
Speedier
Safer
than any plug
now in use!**

Insert wire and squeeze prongs.
THAT'S ALL!
No tools, screws, stripping or slitting required.

Exclusive Features found only in the new

ACADEMY Plug:

Seconds to assemble.

No shocks or shorts—

Insulation never removed. Uses No. 18 flat wire.

Built-in wire locking device.

All-angle finger grip.

Crushproof

Moulded of durable, colorful Urea plastic.

Assortment Consists of

	Retail Value Each	Total
18 Only—Pearl Color Caps. .	\$0.15	\$2.70
18 Only—Brown Color Caps. .	.15	2.70
Total Retail Value.....		\$5.40
Dealer's Cost.....	3.51	
Dealer's Profit.....	1.89	

(05A)

Per Assortment

K1035M X3D51★

Wt. asst. 2 lbs.

WE DO NOT BREAK ASSORTMENTS

OPEN STOCK

Each	Color	Each
K1026M D1C0 (200A).....	Pearl	\$0.15
K1027M D1C0 (205A).....	Brown	.15

Packed 36 of one color in display ctn.

Wt. ctn. 2 lbs.

Each ACADEMY Plug is mounted on a simplified instruction card, and packed 36 to a self-selling display box.

STAR ★ DENOTES BEST SELLER

ATTACHMENT PLUG CAPS

Listed by Underwriters' Laboratories, Inc.



EAGLE

Flexible rubber handle with cord clamp for heavy duty use. 450 cord hole.

15 Amperes—125 Volts
(206)

Each		Each
K1006M	D1C2½★	\$0.19
KK1006M	D1C1½★—(Case Lots 250)	
Twenty-five in ctn.		
250 in case. Wt. case 21 lbs.		



EAGLE

Heavy Duty

Large rubber handle cap. Strong rubber body, unbreakable. Ideal for industrial application. Brass spring prong blades. 450 inch hole.

15 Amperes, 125 Volts

Black Color
(E170)

Each		Each
K1023M	D1C4	\$0.20
KK1023M	D1C3—(Case Lots 250)	
Ten in ctn. 250 in case. Wt. case 18 lbs.		



EAGLE

Heavy Duty

Large industrial rubber handle cap. ½-inch cord hole. Solid brass blades.

15 Amperes—125 Volts
10 Amperes—250 Volts

Black Color
(340)

Each		Each
K1030M	D1C3	\$0.20
KK1030M	D1C3—(Case Lots 250)	
Twenty-five in ctn.		
250 in case. Wt. case 20 lbs.		

STA-TITE



Made of soft black rubber with 1½ inch hole. Long handle.

Without fibre disc's.

With Brass Spring Blades

660 Watts—250 Volts

Black Color
(R311)

Each		Each
K1029M	D1C1★	\$0.15
Lots of 25	D1C0★	
Twenty-five in ctn. Wt. ctn. 1½ lbs.		

ATTACHMENT PLUG CAPS

Listed by Underwriters' Laboratories, Inc.



EAGLE

Flexible spring prong rubber handle cap. Neat in size, sturdy in construction. Can be used for heavy duty work as well as for regular cord set. ½ inch hole. With brass spring prong blades.

15 Amperes, 125 Volts

Black Color
(E179)

Each		Each
K1025M	D0C9★	\$0.15
KK1025M	D0C8¾★—(Case Lots 250)	
Twenty-five in ctn.		
250 in case. Wt. case 18 lbs.		



EAGLE

Flexible rubber handle cap. The neatest handle cap made. Small enough for regular cord sets. Yet sturdy enough for heavy duty work. ½ inch hole.

15 Amperes, 125 Volts

Solid Brass Blades

Black Color
(E123)

Each		Each
K1022M	D0C8★	\$0.13
KK1022M	D0C7★—(Case Lots 250)	
Twenty-five in ctn.		
250 in case. Wt. case 19 lbs.		

Plated Solid Steel Blade
(121)

Each		Each
K1021M	D0C6½★	\$0.10
KK1021M	D0C6★—(Case Lots 250)	
Twenty-five in ctn.		
250 in case. Wt. case 19 lbs.		

ATTACHMENT PLUG CAPS

Listed by Underwriters' Laboratories, Inc.



SNAP-IT

A replacement side outlet flat rubber cap. Keeps cord close to wall. Brass blades.

15 Amperes—125 Volts
10 Amperes—250 Volts

Black Color
(390)

Each		Each
K1032M	D1C3½	\$0.20
KK1032M	D1C2½—(Case Lots 250)	
Twenty-five in ctn.		
250 in case. Wt. case 7½ lbs.		



EAGLE

New style flat rubber cap. Removable brass blades. Very durable. Neat and efficient.

15 Amperes—125 Volts
10 Amperes—250 Volts

Black Color
(380)

Each		Each
K1031M	D1C1★	\$0.15
KK1031M	D1C0★—(Case Lots 250)	
Twenty-five in ctn.		
250 in case. Wt. case 10 lbs.		

STA-TITE

Black Color Rubber Plug Caps
Neat and attractive.

With removable brass spring blades. For easy cord attachment. Cord hole ¾ inch.

660 Watts—250 Volts
(R211)



Each		Each
K1028M	D1C3★—Wt. per 100, 3 lbs.	\$0.19
Lots of 50	D1C2★	
Packed 50 plug caps in a ctn.		
Wt. ctn. 2 lbs.		



EAGLE

This is the new style flat cap grip handle; can be used in place of the standard round cap; brass blades.

Genuine Spring Action
660 Watts—250 Volts

Brown Color
(A105)

Each		Each
K1020M	D0C8★	\$0.13
KK1020M	D0C7¼★—(Case Lots 250)	
Twenty-five in a carton, 250 in a case		
Wt. case 9 lbs.		

STAR ★ DENOTES BEST SELLER

PLUG CAPS

Listed by Underwriters' Laboratories, Inc.

GENERAL ELECTRIC

Less than ctn. lots.....D1C8%
 Carton lots.....D2C8%
 Standard pkg. lots.....D3C8%



Plastic quick clamp plug. Makes repairing electric cords easy. Wired in seconds. No terminal screws. No wire stripping.

10 Amperes—250 Volts
 15 Amperes—125 Volts

Ivory
 (1110/2)

D1C8% Each Each

K633M Less than ctn. lots D1C1★ \$0.14

Full ctn. lots D1C0★

KK633M D0C9★—Standard
 package lots (250)

Brown
 (1110/1)

K632M D1C0★ \$0.12

Full ctn. lots D0C9★

KK632M D0C7★—Standard
 package lots (250)

Twenty-five in ctn., 250 in standard pkg.
 Wt. pkg. 10 lbs.



EAGLE

Made of bakelite material.
 With brass spring prong
 blades.

15 Amperes—125 Volts

Brown Color
 (794B)

Each Each

K1034M D0C6½★ \$0.10

KK1034M D0C6★—(Case lots 250)

Twenty-five in a carton
 250 in case. Wt. case 10 lbs.

PLUG CAPS

Listed by Underwriters' Laboratories, Inc.

EAGLE



Two wire armored grip
 cap. Parallel blades. Cord
 hole .250-.530-inch. For use
 with cord connectors like
 K1016M.

10 Amperes—250 Volts

15 Amperes—125 Volts

(F51)

Each Each

K1015M D2C8 \$0.45

KK1015M D2C7—(Case lots 50)

Ten in ctn., 50 in standard pkg.

Wt. pkg. 5¼ lbs.

EAGLE



Heavy Duty

Solid rubber construction. Terminal screws
 staked and backed out for easy wiring. Brass
 prongs securely riveted through rubber. Non-
 removable metal clamps, adjustable to wire
 sizes. All steel parts finished to resist corrosion.
 Fibre insulating washers. Cord hole .225 to .600
 O. D. Diameter 1½ inches. For use with cord con-
 nectors like K1016M.

15 Amperes—125 Volts

(852)

Each Each

K1004M D2C6½ \$0.40

KK1004M D2C3½—(Case lots 50)

Ten in ctn., fifty in case. Wt. case 6 lbs.



EAGLE

Two-wire rubber cord clamp
 attachment cap. With stand-
 ard parallel brass spring
 action blades. Ideal for use on
 extension lights, motors, fans,
 industrial machinery, equip-
 ment and for many other
 uses. For use with cord con-
 nectors like K1016M.

10 Amperes—250 Volts

15 Amperes—125 Volts

Black Color

(A172)

Each Each

K1024M D2C6 \$0.39

KK1024M D2C3½—(Case lots 250)

Twenty-five in ctn., 250 in case.

Wt. case 3½ lbs.

PLUG CAPS

Listed by Underwriters' Laboratories, Inc.



Two wire heavy duty metal caps with metal
 cord grips. Cord hole ⅞-⅝ inch. For severe
 services.

20 Amperes—250 Volts

Will Fit K613M Receptacles, K614M
 Connector Bodies

(GE3117)

Each Each

K611M D6C2 \$0.76

Less than ctn. lots D5C5

Full carton lots

KK611M D4D7—Standard

package lots (30)

Ten in ctn. 30 in standard pkg.

Wt. pkg. 5 lbs.

EAGALOK



Interchangeable with all stand-
 ard "Twist Lock" locking de-
 vices. Armored black bakelite.
 Brass blades. Just turn to lock,
 turn to unlock. Cord hole .225
 to .600 O. D.

Two wire with adjustable
 cord clamp.

20 Amperes—250 Volts—Two Wire

(874)

Each Each

K1045M D4C0 \$0.60

KK1045M D3C8—(Case lots 50)

Ten in ctn. 50 in case. Wt. case 10 lbs.

15 Amperes—125 Volts—Two Wire

10 Amperes—250 Volts

(872)

Each Each

K1018M D3C6 \$0.55

KK1018M D3C4—(Case lots 50)

Ten in ctn. 50 in case. Wt. case 7 lbs.

CORD CONNECTORS

Listed by Underwriters' Laboratories, Inc.

EAGLE



Lock-On—Rubber

Automatically locks any standard cap. Cap released by pressing two buttons. Clamp holds cord securely. Black rubber with white phenolic push buttons. Individually carted.

15 Amperes—125 Volts

Each K726M (50) D7C0.....\$1.00
Lots of 10 D6C7

Ten in box, 100 in ctn. Wt. ctn. 16 lbs.



EAGLE

Heavy duty type, sturdy rubber construction. Flexible rubber handles with cord clamps. Cord hole .450 inch. Parallel slots.

15 Amperes—125 Volts

Each K933M (223) D4C5.....\$0.70
KK933M (223) D4C2—(Case lots 100)

Ten in ctn, 100 in case. Wt. case 25 lbs.



EAGLE

Jumbo rubber cord connector, complete with cap. Brass blades. 3/4-inch hole.

15 Amperes—125 Volts

Black Color
(161)

Each K937M D3C3★.....\$0.50
KK937M D3C3★—(Case lots 200)

Ten in ctn., 200 in case, Wt. case 35 lbs.

CORD CONNECTORS

Listed by Underwriters' Laboratories, Inc.

EAGLE—JUMBO



Large connector made of live rubber with two screw fastening and brass washer reinforcement for rigid assembly. 3/4-inch cord hole. Ample clearance at terminals to facilitate easy wiring. For use with plug caps such as No. K1011M.

15 Amperes—125 Volts

Black Color
(180)

Each K938M D2C5★.....\$0.39
KK938M D2C5★—(Case lots 250)

Twenty-five in ctn., 250 in case.

Wt. case 28 lbs.

STA-TITE



Black plastic body, easy to wire. Bronze blades and adjustable tension give positive contact to any male cap.

Matches K1028M (R211) Male-Cap
3/8 in. Cord Hole

(F116-BX)

Each K122M D1C4.....\$0.25
KK122M D1C3—(Case lots 500)

Fifty in box, 500 in ctn. Wt. ctn. 19 lbs.

CORD CONNECTORS

Listed by Underwriters' Laboratories, Inc.

EAGLE



Two wire armored grip connectors. Bakelite body. Cord hole .250-.530 inch. For use with plug caps like K1015M.

10 Amperes—250 Volts

15 Amperes—125 Volts

(F55)

Each K1016M D3C5.....\$0.55
KK1016M D3C2—(Case lots 50)
Ten in ctn. 50 in standard pkg.
Wt. pkg. 8 lbs.

TWIST LOCK DEVICES
CONNECTOR BODIES

Listed by Underwriters' Laboratories, Inc.

EAGALOK



Interchangeable with all standard "Twist Lock" locking devices. Armored black bakelite. Just turn to lock, turn to unlock. Two wire polarized with adjustable cord clamp.

20 Amperes—250 Volts—Two Wire

Each K917M (894) D7C0.....\$1.00
KK917M (894) D6C6—(Case lots 50)

Ten in ctn. 50 in case. Wt. case 12 lbs.

15 Amperes—125 Volts—Two Wire

10 Amperes—250 Volts

Each K913M (892) D5C2.....\$0.80
KK913M (892) D4C9—(Case lots 50)

Ten in ctn. 50 in case. Wt. case 9 lbs.

STAR ★ DENOTES BEST SELLER

ELECTRIC CUBE TAPS

Listed by Underwriter's Laboratories, Inc.

**EAGLE****All Rubber**

One-piece construction.
Indestructible and tamper
proof.

15 Amperes, 125 Volts**Spring Type Brass Blades****Brown Color****(135)**

Each		Each
K843M	D2C3★	\$0.35
KK843M	D2C0½★ (Case lots 250)	

Twenty-five in ctn., 250 in case.
Wt. case 20 lbs.

GENERAL ELECTRIC

Multiple lampholder socket and quick clamp
triple tap.

Less than carton lots	D1C8%
Carton lots	D2C8%
Standard package lots	D3C8%

15 Amperes—125 Volts**(1711/2)**

Each		Each
K643M	Ivory	\$0.29

Less than carton lots	D2C4
Full carton lots	D2C1
KK643M	D1C8
Standard package lots (100)	

(1711/1)

K642M	Brown	\$0.25
-------	-------	--------

Less than carton lots	D2C0
Full carton lots	D1C8
KK642M	D1C5
Standard package lots (100)	

Ten in ctn., 100 in standard pkg.
Wt. pkg. 10 lbs.

ELECTRIC CUBE TAPS

Listed by Underwriter's Laboratories, Inc.

\$SNAPIT**Competitive Grade**

Two-piece plug, made of
genuine bakelite. Three pin
outlets with reversed brass
blades, permitting use of all
three outlets even in a du-
plex receptacle.

15 Amperes, 125 Volts**Ivory**

Each		Each
K815M	D1C3½ (60C)	\$0.20
KK815M	D1C2½ (Case lots 250)	

Brown

K814M	D1C1★ (60)	.20
KK814M	D1C0★ (Case lots 250)	

Twenty-five in ctn., 250 in case,
Wt. case 20 lbs.

ELECTRIC CUBE TAPS

Listed by Underwriter's Laboratories, Inc.

EAGLE**Competitive Grade**

Reverse brass blades make all
outlets usable. Patented finding
grooves for all outlets, elimi-
nates needless fuss and bother.
Fastened permanently and in-
visibly. Spring prong feature on
this item is most desirable to
avoid the tap falling out of re-
ceptacle which so often happens
with regular blade taps.

15 Amperes, 125 Volts**Brass Spring Prong Blades****Brown Color****(781B)**

Each		Each
K824M	D1C2½★	\$0.19
KK824M	D1C1½★ (Case lots 250)	

Twenty-five in ctn., 250 in case,
Wt. case 10 lbs.

EAGLE**Competitive Grade**

Two-piece plug marked
genuine bakelite. Three pin
outlets. This is a replace-
ment plug for extension
cords.

15 Amperes, 125 Volts**Ivory**

Each		Each
K816M	D1C3 (67C)	\$0.20
KK816M	D1C2 (Case lots 250)	


Brown

K825M	D1C0½★ (786B)	.20
KK825M	D0C9½★ (Case lots 250)	

Twenty-five in ctn., 250 in case,
Wt. case 20 lbs.

PLUG-IN TAPS

EAGLE



Double Ground Tap

Listed by Underwriters' Laboratories, Inc.

Converts receptacle to a safe grounded outlet—polarized prongs. Fastens with center screws which replaces wall plate screw. For grounded caps as well as standard caps.

15 Amperes, 125 Volts

Each		Color	Each
K725M (880V)	D6C0	Ivory	\$0.85
Lots of 10 D5C7			
K724M (880B)	D5C6	Brown	.80
Lots of 10 D5C3			

Ten in box, 100 in ctn. Wt. ctn. 18 lbs.

SNAPIT



Competitive Grade
"Three In Line"

A new device which may be plugged into any

wall receptacle, featuring three convenience outlets in a line, all facing forward. Made of bakelite. Will accommodate three flat or round standard attachment caps.

15 Amperes, 125 Volts—10 Amperes, 250 Volts

Each		Color	Each
K818M	D2C6½ (70C)	Ivory	\$0.39
KK818M D2C4—(Case lots 100)			
K817M	D2C2 (70)	Brown	.35
KK817M D2C0—(Case lots 100)			

Ten in ctn., 100 in case. Wt. case 20 lbs.

ELECTRIC APPLIANCE PLUGS

Listed by Underwriters' Laboratories, Inc.

EAGLE



Brown bakelite body, with snap switch. Pull handle. Nickel plated spring wire guard. Plug 3¼ inches long, 1¼ inches wide. Will fit opening 1¼x5½ inches.

10 Amperes—125 Volts
5 Amperes—250 Volts

(9416)

Each		Each
K1359M	D3C1	\$0.45
KK1359M	D2C8—(Case lots 100)	

Ten in ctn. 100 in standard pkg.

Wt. standard pkg. 16 lbs.

EAGLE



Bakelite body. Nickel plated spring wire guard. Plug 2½ inches long, 1¼ inches wide. Will fit opening 1¼x5½ inches.

10 Amperes—125 Volts
5 Amperes—250 Volts

(535)

Each		Each
K1354M	D1C1	\$0.19
KK1354M	D1C0—(Case lots 250)	

Ten in ctn. 250 in standard pkg.

Wt. standard pkg. 62 lbs.

EAGLE

Miniature Type



These plugs can be used with waffle irons, toasters, percolators, and other electrical appliances equipped with round miniature terminals.

Bakelite plug. Nickel plated spring wire guard. Plug 1½ inches long, 1¼ inches wide; will fit open-1x3/8 inch.

10 Amperes—125 Volts
5 Amperes—250 Volts

(E720)

Each		Each
K1355M	D1C0★	\$0.15
KK1355M	D0C9★—(Case lots 100)	

Packed ten in display ctn.

100 in standard pkg.

Wt. standard pkg. 8½ lbs.

SNAPIT



Black bakelite plug with 1½ inch spacing of appliance pins. Cord spring.

10 Amperes—250 Volts
15 Amperes—125 Volts

For Nesco and Westinghouse Type Roasters

(305)

Each		Each
K1353M	D2C4	\$0.35
KK1353M	D2C2—(Case lots 100)	

100 in standard pkg. Wt. pkg. 12½ lbs.

STAR ★ DENOTES BEST SELLER

APPLIANCE CORD SETS

Listed by Underwriters' Laboratories, Inc.,—Do-Nut Label



SHAPLEIGH'S



Black bakelite peer armored switch plug with pull handle. Six feet black rayon cord with white markers. 3000 cycle. Black rubber cap with brass spring blades.

1100 Watts, 18 Gauge

Length 6 feet.

(JM1)

Each		Each
K1317M	D7C0★	\$1.05
KX1317M	D5C5★—(Case lots 25)	

Bulk

Twenty-five in standard pkg. Wt. pkg. 12½ lbs.

SHAPLEIGH'S



Black bakelite peer switchless plug with plain cord spring. Six feet black rayon cord with white markers. 3000 cycle. Black rubber cap with brass spring blades.

1100 Watts, 18 Gauge

Length 6 feet.

(JM4)

Each		Each
K1320M	D4C8★	\$0.75
KX1320M	D4C5★—(Case lots 25)	

Bulk

Twenty-five in standard pkg. Wt. pkg. 11¼ lbs.



Black composition Cutler-Hammer screwless unarmored switchless plug with plain cord spring. Six feet black rayon cord with white markers. 3000 cycle. Black rubber cap with brass spring blades.

1100 Watts, 18 Gauge

Length 6 feet.


(CH1/6)

Each		Each
K1259M	D5C0★	\$0.75
KX1259M	D4C6★—(Case lots 25)	

Bulk

Twenty-five in standard pkg. Wt. pkg. 12½ lbs.

SHAPLEIGH'S



Fits all standard makes of fry pans and coffee makers; Sunbeam, Cory, Silex, G. E., Universal, Dormeyer, Dominion, Westinghouse, Everhot, etc. Key slot bakelite miniature plug. 18 gauge parallel rubber cord. HPN type. Rubber cap.

1100 Watts—18 Gauge

Length 6 feet.

(P/4A76)

Each		Each
K1264M	D5C0★	\$0.79
KX1264M	D4C5★—(Case lots 25)	

Bulk

Twenty-five in ctn. Wt. ctn. 7 lbs.

SHAPLEIGH'S



Black bakelite BW unarmored switchless plug with plain cord spring, miniature type. Six feet rayon cord with white markers. 3000 cycle. Black rubber cap with brass spring blades.

1100 Watts, 18 Gauge

Length 6 feet.

(JM7)

Each		Each
K1324M	D4C8★	\$0.75
KX1324M	D4C5★—(Case lots 25)	

Bulk

Twenty-five in standard pkg. Wt. pkg. 10 lbs.

SHAPLEIGH'S



Replacement cord for irons, heaters and other appliances made of long life glazed cotton covered cord with bakelite cap with brass spring blades at one end and metal eyelet terminals at the other end.

1500 Watts, 16 Gauge, 3000 Cycle

Length 7 feet.

(J106)

Each		Each
K1269M	D5C5★	\$0.85
KX1269M	D5C2★—(Case lots 25)	

Bulk

Twenty-five in case. Wt. case 30 lbs.

1250 Watts, 18 Gauge, 3000 Cycle

Length 7 feet.

(J108)

Each		Each
K1271M	D4C3★	\$0.65
KX1271M	D4C0★—(Case lots 25)	

Bulk

Twenty-five in case. Wt. case 25 lbs.

EXTENSION CORDS

Listed by Underwriters' Laboratories, Inc.

SHAPLEIGH



For General Use

18 gauge POSJ rubber parallel cord with rubber plug and cube tap.

Brown Color

Each	Lgth., ft.	Wt. ctn., lbs.	Each
	(18PT12)		
K1267M	D6C0	12 84	\$0.98
KX1267M	D5C7—(Case lots 25)		
	(18PT9)		
K1266M	D5C5	9 72	.85
KX1266M	D5C0—(Case lots 25)		
Bulk. Twenty-five in case.			



Bakelite cube tap and approved 18 gauge pot plastic parallel cord and flat bakelite cap.

All Ivory Color

Each	Lgth., ft.	Wt. ctn., lbs.	Each
	(J112V)		
K1277M	D4C5	15 15	\$0.70
KX1277M	D4C2—(Case lots 25)		
	(J111V)		
K1275M	D3C9½	12 12	.60
KX1275M	D3C6½—(Case lots 25)		
	(J110V)		
K1274M	D3C3★	9 10¼	.50
KX1274M	D3C1★—(Case lots 25)		
	(J109V)		
K1272M	D2C8	6 8¼	.42
KX1272M	D2C6—(Case lots 25)		
Bulk. Twenty-five in case.			


All Brown Color

Each	Lgth., ft.	Wt. ctn., lbs.	Each
	(785/15)		
K1312M	D4C1★	15 15	\$0.62
KX1312M	D3C8★—(Case lots 25)		
	(785/12)		
K1310M	D3C5★	12 12	.55
KX1310M	D3C2½★—(Case lots 25)		
	(785/9)		
K1309M	D2C9½★	9 10¼	.45
KX1309M	D2C7★—(Case lots 25)		
	(785/6)		
K1307M	D2C4★	6 8¼	.35
KX1307M	D2C2★—(Case lots 25)		
Bulk. Twenty-five in shipping case.			

EXTENSION CORDS

Listed by Underwriters' Laboratories, Inc.

EAGLE



Brass push-thru socket and approved 18-gauge pot brown color plastic parallel cord and flat bakelite cap.

(485/9)

Each	Lgth., ft.	Wt. ctn., lbs.	Each
K1298M	D6C3	9 11¼	\$0.95
KX1298M	D5C9—(Case lots 25)		
Bulk. Twenty-five in case.			

EXTENSION CORDS

WOODS



18 Gauge Rubber Cord .300 O. D.


For use in connecting refrigerator, washing machine, ironer, extending portable lamps, etc. to existing outlet when same is removed from appliance. 18 gauge heavy rubber cord, two conductor. Rubber connector and plug cap.

Each	Lgth., ft.	Wt. per pkg., lbs.	No. in std. pkg.	Each
	(195/25)			
K1284M	X1D00★	25 28	25	\$1.50
KX1284M	D9C0★—(Case lots 25)			
	(240/18)			
K1288M	D6C3★	15 17	25	.95
KX1288M	D5C7★—(Case lots 25)			
	(195/8)			
K1283M	D4C0★	8 9	25	.59
KX1283M	D3C6★—(Case lots 25)			

EXTENSION CORDS

Listed by Underwriters' Laboratories, Inc.

ELECTROSTRIP

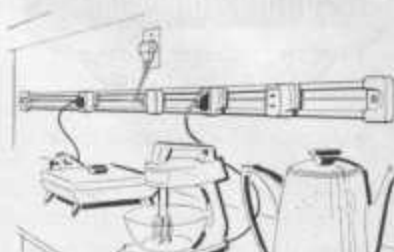

"4-Footer" Kit

Mounts on any surface without breaking into plaster. Pre-drilled holes every 8 inches.

Handy, polarized plug electrifies strip. Receptacles twist in anywhere along strip ready for use.

Kit Contains: 4 ft. of Strip; 3 Receptacle Plugs; 2 End Caps; 1 Feed-In Attach. Plug Cord Set (12 inches long); Necessary Mounting Screws.

15 Amperes - 125 Volts A. C.

Each	Each
K301M (EK4) X1D97	\$2.95
KK301M (EK4) X1D77—(Case lots 5)	

Five in a case. Wt. case 6 lbs.

LAWN MOWER CORD SETS



Red Color Permavin Vinyl Cord

High visibility red color avoids accidents, promotes safety. Ideal for use with hedge trimmers, lawn mowers, electric drills and sanders, and all power tools where there is danger of cutting the cord or getting it tangled. Complete with connector and plug cap.

16 Gauge .325 O.D. Vinyl Cord

(714)

Each	Lgth., ft.	No. ctn.	Wt. lbs.	Each
K1252M	X5D50★	100	10	59
6-K1252M	X5D00★	(Case lots 10)		

(713)

K1251M	X2D75★	50	25	76
KX1251M	X2D50★	(Case lots 25)		

(712)

K1242M	X1D65	25	25	36
KX1242M	X1D50	(Case lots 25)		

WOODS



For use with all types and kinds of portable tools. Electric hedge shears, electric lawn mowers, etc. Complete with connector and plug cap.

16 Gauge .325 O. D. Rubber Cord

(543)

Each	Lgth., ft.	No. ctn.	Wt. lbs.	Each
K1372M	X4D00★	100	6	40
6-K1372M	X3D75★	(Case lots 6)		

(542)

K1370M	X2D05★	50	12	38
KX1370M	X1D95★	(Case lots 12)		

(541)

K1162M	X1D25	25	25	36
KX1162M	X1D15	(Case lots 25)		

POWER CORD SETS

WOODS



For power tools, lawn mowers, house trailers and contractors equipment.

Heavy duty, flexible and resistant to abrasion, moisture, acid, oil, and severe weather conditions. Heavy U/L approved armored grip male and female connectors.

14 gauge (approx.) component all copper conductor, A20 neoprene jacket.

(214)

Each	Lgth., ft.	No. ctn.	Wt. lbs.	Each
K1256M	X5D75★	100	5	45
6-K1256M	X5D25★	(Case lots 5)		

(213)

K1254M	X3D25★	50	10	45
6-K1254M	X2D95★	(Case lots 10)		

(212)

K1161M	X1D95	25	15	40
KX1161M	X1D75	(Case lots 15)		



Construction and Heavy Duty

For contractors equipment—heavy motors, grinders, drills, saws, sanders, polishing machines, etc.

Complete with extra heavy duty 2-conductor "S" type .500 OD flexible all rubber cable equipped with special heavy duty rubber female cable clamp connector and male attachment plug.

12 Gauge—.500 OD

(220)

Each	Lgth., ft.	No. ctn.	Wt. lbs.	Each
K1319M	X7D75★	100	5	75
KX1319M	X7D25★	(Case lots 5)		

(219)

K1290M	X4D25★	50	5	40
KX1290M	X3D95★	(Case lots 5)		

(218)

K1164M	X3D25	25	10	40
KX1164M	X3D00	(Case lots 10)		

APPROXIMATE GUIDE TO DETERMINE CORRECT GAUGE OF CABLE

Length of Cable	Amperes of Load						
	4	5-6	7	8-10	11-15	16-20	25
25	Gauge 18	Gauge 18	Gauge 18	Gauge 18	Gauge 16	Gauge 14	Gauge 12
50	Gauge 18	Gauge 18	Gauge 18	Gauge 16	Gauge 14	Gauge 12	Gauge 10
100	Gauge 18	Gauge 16	Gauge 16	Gauge 14	Gauge 14	Gauge 12	Gauge 10
150	Gauge 16	Gauge 14	Gauge 14	Gauge 12	Gauge 12	Gauge 10	Gauge 8
200	Gauge 14	Gauge 12	Gauge 12	Gauge 12	Gauge 10	Gauge 8	Gauge 6

1/2 H.P. = 7.4 Amps.

3/4 H.P. = 10.2 Amps.

800 Watts = 7 Amps.

1 H.P. = 13 Amps.

2 H.P. = 24 Amps.


1100 Watts = 10 Amps.

1650 Watts = 15 Amps.

STAR ★ DENOTES BEST SELLER

TROUBLE LAMPS

WOODS

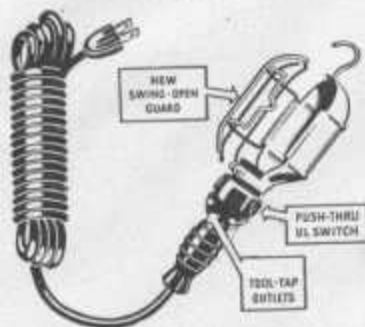

For use as extension or trouble lights: Heavy duty side opening cage for easy lamp change. Built in reflector welded to case. Sturdy steel hook that stays put; Non-slip handle grip of moulded rubber, spring tension plug assures constant contact.

Push through switch and convenience outlet in handle.

Lamp Bulbs not included

With .310 O. D. All Rubber Cord

Length 50 feet

Each		Each
K1244M	(31M/50) X2D20★	\$3.15
6-K1244M	(31M/50) X2D05★—(Case lots 6)	

Six in ctn. Wt. ctn. 18 lbs.

Length 25 feet

K1243M	(31M/25) X1D50★	\$2.20
6-K1243M	(31M/25) X1D37★—(Case lots 12)	

Twelve in ctn. Wt. ctn. 24 lbs.

LAMP GUARDS

EAGLE



A new type guard with easy locking features. Two thumb locks replace obsolete screws. Equipped with reflector, light in weight, entire guard and reflector cadmium plated. 1 1/4-inch collar for all types of weather-proof sockets and trouble lamp handles.

(467)

Each		Each
K1348M	D3C5	\$0.55
KK1348M	D3C5—(Case lots 25)	

Twenty-five in case. Wt. case 12 1/2 lbs.

AUTOMOBILE SPOTLIGHTS

Listed by Underwriters' Laboratories, Inc.

GENERAL ELECTRIC



Portable

Gives strong, concentrated beam. Spot house numbers and read road signs easily. Plugs into cigarette lighter socket.

Non-breakable lens. Six volt 1/2 amp. pre-focused bulb. Aluminized reflector. Ivory plastic handle with snap-in plug receiver. Spring tension fish tail plug. Suspension hook. Rubber cord 12 feet long. Built-in cord spool with special lock.

Uses 1/2 amp. at 6 volts. Diameter 2 inches. Length over all 6 inches.

(2093/2)

Each		Each
K1412M		\$1.98
Less than carton lots	X1D62	
Full carton lots	X1D43	
KK1412M—Standard package		
lots (30)	X1D23	

Three in ctn., 30 in std. pkg. Wt. pkg. 17 lbs.

ELECTRIC TESTERS

PLUG-RITE



Detects shorted or defective appliances. . . Protects against dangerous electric shock.

Easy-to-use electrical tester designed especially for home use. Three quick and easy steps. Complete with detailed instructions.

(PRI)

Each		Each
K1078M	X1D19	\$1.98

Packed 12 in a display carton.
Wt. ctn. 4 lbs.

ELECTRIC CIRCUIT TESTERS

EAGLE DETECTO-LITE

For reading and testing electric circuits from 90 to 600 volts.

With Pocket Clip

Instantly indicates voltage, A.C. or D.C. current. Polarity and cycles. Detects live and ground wires, blown fuses, defective spark plugs, resistors, condensers and insulators.



Ten Decto-Lites on Display Card

Size of display: 13 1/4 inches high, 10 inches wide.

(D914)

Display		Each
K1082M	X4D25	\$0.69

Weight per display 6 3/4 lbs.

STAR ★ DENOTES BEST SELLER



Self-Selling Individual Card


(914)

Each		Each
K1083M	D4C5	\$0.69

One on a card. Wt. 3 ozs.

REPLACEMENT ELEMENTS

EAGLE



Coiled Ni-chrome Wire Requires No Further Cutting and May Be Stretched to any Desired Length.

800 Watts—120 Volts

For Toasters and Heaters

No. 2 Wire, $\frac{1}{16}$ inch diameter

Each	Each
K1070M (E465/2) D1C9 $\frac{1}{2}$	\$0.35

For Hot Plates and Heavier Work

No. 3 Wire, $\frac{3}{16}$ inch diameter

Each	Each
K1071M (E465/3) D2C1★.....	\$0.35

One Length on a Card, 10 Cards in a Carton

Weight per Carton $\frac{1}{2}$ lb.

200 in Standard Package



SNAPIT

For Replacement in Toasters, Waffle Iron or Any Heater Using Coil Elements.

1000 Watts—120 Volts

(2440)


Each	Each
K1074M D1C7★.....	\$0.25

One length on a card. Ten cards in a box.

Ten boxes in a std. ctn. Wt. ctn. 5 lbs.

ELECTRIC DOOR CHIMES

NUTONE



Jefferson

Mahogany cabinet, brass tubes. Colonial wall clock. Telechron movement. Eight or four note front door. Two notes rear door, one note third door.

Transformer Included

Size 11x5x58 inches.

Each ■ Each
 -L46-M X53D97.....\$89.95
 One in ctn. Wt. ctn. 13 lbs.



Coronet

Three satin brass tubes.
 Two notes front door, one note rear door.

Size 8½x2½x39¾ inches.

Each ■ Each
 6-L33W-M X11D02.....\$16.95
 Lots of 3 X10D17

Walnut

6-L33LO-M X11D02.....16.95
 Lots of 3 X10D17

Lime Oak

Three in ctn. Wt. ctn. 19 lbs.



Jewel

Two notes front door, one note rear door.

Size 7x9x3 inches.

Each ■ Each
 L5342M X6D47 (L22W).....\$9.95
 LX5342M X5D97—(Case lots 6)

Walnut with Gold Tubes

Lime Oak with Gold Tubes
 L5343M X6D47 (L22LO).....9.95
 LX5343M X5D97—(Case lots 6)

Six in ctn. Wt. ctn. 23 lbs.



Mount Vernon

Hammered brass.
 Colonial design. Two notes front door. One note rear door.

Size 7x11¾ inches.

Each ■ Each
 6-L20-M X7D12★.....\$10.95
 Lots of 6 X6D57★

One in ctn. Wt. ctn. 3¼ lbs.



Chord Tone

Desert sand cover. Smart grille pattern. Gold flecked grille cloth. Two chords front door, two notes rear door.

Size 7½x9x2½ inches.

Each ■ Each
 6-L30-M X9D07★.....\$13.95
 Lots of 6 X8D37★

One in ctn. Wt. ctn. 3¼ lbs.



Decorator

Desert sand finish cover, brass grille. Two notes front door, one note rear door.

Size 4½x7x2 inches.

(L17) ■ Each
 L5345M X4D52.....\$6.95
 LX5345M X4D17—(Case lots 6)

Six in ctn. Wt. ctn. 9 lbs.



Rythmatic

Repeating chime front door, two notes rear door, one note third door.

Size 7x7¾x2½ inches.

Ivory and Gold ■ Each
 L5346M X6D47 (L21 IG).....\$9.95
 LX5346M X5D97—(Case lots 6)

White and Silver
 L5347M X6D47 (L21 WS).....9.95
 LX5347M X5D97—(Case lots 6)

Six in ctn. Wt. ctn. 12 lbs.

Dealer can combine various chime models to make minimum quantity of six to obtain quantity prices

Items marked -L- not carried in stock, can only be furnished by shipping direct from factory, F. O. B., Cincinnati, Ohio

STAR ★ DENOTES BEST SELLER

ELECTRIC DOOR CHIMES

NUTONE



Mayfair

Two notes front door, one note rear door.

Size 7 $\frac{3}{8}$ x 11 $\frac{1}{2}$ x 3 inches.

Walnut Cover—Gold Tubes

Each	■ Each
L5348M X5D82 (L23W).....	\$8.95
LX5348M X5D37—(Case lots 6)	

Lime Oak Cover—Gold Tubes

L5349M X5D82 (L23LO).....	8.95
LX5349M X5D37—(Case lots 6)	

Six in ctn. Wt. ctn. 16 lbs.



Harmony

Plastic cover. Two notes front door, one note rear door.

Size 7 x 7 $\frac{3}{8}$ x 2 $\frac{3}{4}$ inches.

Ivory and Gold

Each	■ Each
L5350M X5D17★(L16IG).....	\$7.95
LX5350M X4D77★—(Case lots 6)	

White and Silver

L5351M X5D17★(L16WS).....	7.95
LX5351M X4D77★—(Case lots 6)	

Six in ctn. Wt. ctn. 15 lbs.



Champion

Plastic cover. Two notes front door, one note rear door.

Size 7 $\frac{1}{2}$ x 4 $\frac{3}{4}$ inches.

Ivory and Gold

Each	■ Each
L5352M X3D22★(L12IG).....	\$4.95
LX5352M X2D97★—(Case lots 12)	

White and Silver

L5353M X3D22★(L12WS).....	4.95
LX5353M X2D97★—(Case lots 12)	

Twelve in ctn. Wt. ctn. 15 lbs.

NON-ELECTRIC DOOR CHIMES

NUTONE



Non-Electric Greeter

Door chime with solid brass nameplate with space for name or house number and forged brass handle. Unique oyster white back cover. Sounds two clear loud musical tones.

Easily installed. No electrical wiring. Adjustable to wood or metal doors $\frac{1}{8}$ to $2\frac{1}{4}$ inches thick. For doors thicker than $2\frac{1}{4}$ inches or for installation in walls up to 9 inches use shaft extension K380M-EX310.Width 2 $\frac{1}{2}$ inches. Height 5 $\frac{1}{2}$ inches.

(MC302)

Each	■ Each
L1293M X3D22.....	\$4.95
LX1293M X2D97—(Case lots 6)	

One in box. Six in pkg. Wt. pkg. 8 lbs.



Non-Electric

Caroleer Door Knocker

Gold anodized nameplate outside. Oyster white cover. Adjustable—fit metal or wood doors $\frac{1}{4}$ in. to $2\frac{1}{4}$ in. (For doors thicker than $2\frac{1}{4}$ in. or for installation in walls, up to 9 in. ask for extension.)

(DK308)

Each	■ Each
L5354M X5D49.....	\$8.45
LX5354M X5D07—(Case lots 6)	

Six in ctn. Wt. ctn. 11 lbs.

ELECTRIC DOOR CHIME

PUSH BUTTONS

■ NUTONE

Electrically Lighted
PUSH-LITE

Dresses up any doorway. After dark guide for visiting friends. Personalized name plate. Easy to install, no extra wiring. Sparkling golden Lucite. Weather and tarnish-proof. 6-16 volt clear white lamp bulb lasts up to ten years of normal use.

Height 3 inches. Width 1 $\frac{1}{2}$ inches.

(PB8)

Each	■ Each
K239M X1D63.....	\$2.50
KK239M X1D50—(Case lots 12)	

One in box. Twelve in ctn. Wt. ctn. 1 lb.

MODERN

Smart black and ivory plastic beautiful by day, luminous by night. Silver anodized cover conceals mounting screws. Weather-proof, rust-proof, can't stain door frame. Size 3 x $\frac{3}{4}$ inch.

(PB3)

Each	■ Each
K234M D8C1.....	\$1.25
Lots of 12 D7C5	

Twelve in counter merchandiser.

Wt. pkg. $\frac{1}{2}$ lb.

JEWEL

Colonial style gold anodized 3-inch button plate. Luminous button glows at night. Coil spring gives positive sliding contact. Fully insulated. Weather-proof. Size 3 x 1 $\frac{1}{4}$ inches.

(PB4)

Each	■ Each
K235M D8C1.....	\$1.25
Lots of 12 D7C5	

Twelve in counter merchandiser.

Wt. pkg. 1 lb.

NOTE—Dealer can combine various chime models to make Minimum Quantity of six to obtain Quantity Price.

STAR ★ DENOTES BEST SELLER

ELECTRIC DOOR CHIME
PUSH BUTTONS

■ NUTONE

Economy

Height 2½ inches.

Width 1½ inches.

Gold Anodized Finish



Each ■ Each
K378M (PB6B) D8C1 \$1.25
 Lots of 12 **D7C5**
 Twelve in std. pkg. Wt. pkg. 1 lb.



Mt. Vernon

Gold anodized finish Colonial style. Height 3¼ inches. Width 1½ inches.

Each ■ Each
K376M (PB2) D6C5 \$1.00
 Lots of 12 **D6C0**
 Twelve in pkg. Wt. pkg. 1 lb.



Round

All luminous gold anodized, ivory plastic button. Fully insulated, has positive sliding contact. Tested and approved by leading electrical laboratories. Fits ¾ inch hole. Size ¾ inch.

Each ■ Each
K232M (PB1) D3C1 \$0.48
 Lots of 12 **D2C9**
 Twelve in counter merchandiser.
 Wt. pkg. ¾ lb.

MECHANICAL DOOR CHIMES

THE AUTH-O-TONE



Suburban

Instead of Knocking, It Chimes

Sounds Two Distinct Harmonious Chime Tones


Manually operated—no electricity, batteries, transformers or wiring. Combines beauty, quality and simplicity for the home, apartment or hotel. Mount directly on doors from ½ to 2 inches thick. Easily installed.

Polished brass knocker 6 inches high 2 inches wide, with space to engrave owner's name. Ivory enameled chimes 6¾ inches long, 3 inches wide, 1¾ inches deep. Mounting space required: 8¾ inches high, 3 inches wide.

Less than six.....D3C0%
 Six or more.....D4C0%

Each ▲ Each
L1298M (840) X5D33 \$7.75
LX1298M (840) X4D65—(Case lots 6)
 Six in pkg. Wt. pkg. 12 lbs.

AUTH ELECTRIC CO.

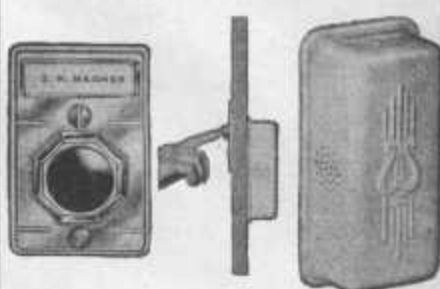

Sounds two melodious, resonant musical notes by merely pushing button. Entirely mechanical in operation. Requires no electricity, wiring or batteries. Mounts directly on door or door frame. Easily installed.

Handsomely styled polished brass push button escutcheon with durable plastic button and name card holder. Ivory enameled chime, mounts inside. Minimum space required for mounting 7¾ inches high, 3¼ inches wide. Fits doors or frames up to 9 inches thick.

Universal

Less than six.....D3C0%
 Six or more.....D4C0%

Each Each
L1299M (855) X3D47 \$4.95
LX1299M (855) X2D97—(Case lots 6)
 Six in pkg. Wt. pkg. 7¼ lbs.

DOOR CHIME
TRANSFORMER

Listed by Underwriters' Laboratories, Inc.

For "Anyplace" Mounting

Greater power. Extra strong. Sturdy construction. Bi-metal safety switch prevents overload damage. No outlet box plate needed, mount on any box (outlet, wiring, fuse or switch) or open wiring position. Can take substantial increases in instantaneous surge loads. Can't burn out.



For 115 Volts 50/60 Cycle A.C.

Each Wt. Ea.,
Volts lbs. ■ Each
K247M (101/OB) X2D02 16 ¾ \$3.10
KK247M (101/OB) X1D86—(Case Lots 48)
 Forty-eight in std. pkg.

ELECTRIC DOOR BELLS



SPERTI-FARADAY

Steel Back and Covers

Nickel Plated Steel Gong; Gray Enameled Wrought Steel Back and Cover; Silver Contact Points; all Parts Held by Screws; double magnet, non adjustable.

6-8 Volt AC

Each	Gong ins.	Wt. Pkg., lbs.	Each
L1269M (PR2 1/2) D8C5★	2 1/4	6	\$1.10
12 or more	D7C9★		

One in a Box; Twelve in a Package

ELECTRIC BUZZERS



SPERTI-FARADAY

Steel Back and Covers

Size Over All 3 1/4 x 2 1/4 inches; Gray Enameled Wrought Steel Box and Cover; Makes a Long Buzzing Sound and is Easily Distinguished from a Bell. Single magnet, non adjustable.

6-8 Volt AC

Each	(PRB)	D8C2★	Each
L1268M			\$1.00
12 or more		D7C5★	

One in Box, without Screws

Twelve in pkg. Wt. pkg. 6 lbs.

DOOR BELL BUTTONS



EAGLE

Heavy Type Deep Pearl Push Button Incorporating a Six Leaf Spider that Will Hold Button Firmly; Will not Stick or Jam; Can be Used on Metal Box; Large Heavy Terminal Screws.

5/8 Inch Center, 1/2 Inch Depth of Shank

Each	Each
K243M (E188) D2C9	\$0.45
10 in ctn., 100 in std. pkg.	Wt. std. pkg. 2 lbs.

DOOR BELL BUTTONS



EAGLE

Heavy type deep pearl push button incorporating a six leaf spider that will hold button firmly; will not stick or jam; can be used on metal box; large heavy terminal screws. Mounted on a nickel plated plate. Length 1 1/2 inches, Width 1 inch.

Each	Each
K242M (E173) D3C2	\$0.50
10 in ctn., 100 in std. pkg.	Wt. pkg. 2 1/2 lbs.



EAGLE Round

For ringing chimes, bells and other signals. Stamped solid brass. Black plastic button. Fibre back with copper alloy contacts.

Diameter 2 1/4 inches

Each	Each
K240M (106) D2C0★	\$0.31
1 in box, with screws, 25 in ctn.	Wt. ctn. 1 1/2 lbs.



EAGLE

Made of Brown Bakelite Material; Complete with Screws; For use with Door Bells, etc.

Each	Each
K245M (9700) D1C3★	\$0.20
One in ctn.	Wt. ctn. 3 ozs.

BELL WIRE



Assorted Colors

18 gauge thermo plastic insulated copper; runs about 135 feet per pound.

For thermostat controls in connection with heating and air conditioning installation. Low Voltage.

Seven Pound Spools

Per Spool	Per Foot
K1204M (BW18) X7D00	\$0.02
Per Case	
KK1204M (BW18) X52D00	(Case lots 8 spools)

We Do Not Cut Spools

Can Assort all Types of Wires and Cards to Obtain Quantity Prices

STAR ★ DENOTES BEST SELLER

ANNUNCIATOR BELL WIRE



Assorted Colors

Red, Blue, Green, White, Brown, Black.

For bells, radios, chimes, communication systems and toy electric trains. Low voltage.

Solid copper conductor, thermo-plastic insulation.

Per Coil	Ft. in coil	Coils in ctn.	Wt. lbs.	Per Coil
K1187M	D1C5★	25	100	12 \$0.25
Per Case				
KK1187M	X14D00★	(Case lots 100 coils)		
		(20/65)		
Per Coil				
K1189M	D3C7★	65	100	30 .70
Per Case				
KK1189M	X34D00★	(Case lots 100 coils)		

DOOR BELL TRANSFORMERS

Listed by Underwriters' Laboratories, Inc.

To be Connected to the Ordinary Alternating Circuit for the Purpose of Stepping Down the Current to a Suitable Voltage for Operating All Classes of Bells, Buzzers, Door Openers, Annunciators and Other Light Signal Work. Their Use Eliminates the Need of Batteries.




EAGLE

Engineered and Made to Meet the Most Exact Conditions in Use with Electric Door Chimes; Heavier Signal, Also Heat Control Devices as Well as Larger Bells and Relays. Cadmium (Rustproof) Finish.

115 Volt 60 Cycle Primary; 16 Volt Secondary

Each	Each
K924M (2332) X1D60	\$2.40
One in ctn., 50 in std. pkg.	Wt. pkg. 50 lbs.



EAGLE

Fitted with Flexible Leads; Highly Efficient and Economical in Operation; Cadmium (Rustproof) Finish.

Primary 115 Volts; Secondary 8-10 Volts; 50-60 Cycle

Each	Each
K922M (2302) X1D40★	\$2.20
One in ctn., 50 in std. pkg.	Wt. pkg. 50 lbs.

ELECTRIC DOOR CHIME
PUSH BUTTONS

■ NUTONE



Economy

Height 2½ inches.

Width 1¾ inches.

Gold Anodized Finish

Each ■ Each
K378M (PB6B) D8C1 \$1.25
 Lots of 12 **D7C5**
 Twelve in std. pkg. Wt. pkg. 1 lb.



Mt. Vernon

Gold anodized finish Colonial style. Height 3¼ inches. Width 1½ inches.

Each ■ Each
K376M (PB2) D6C5 \$1.00
 Lots of 12 **D6C0**
 Twelve in pkg. Wt. pkg. 1 lb.



Round

All luminous gold anodized, ivory plastic button. Fully insulated, has positive sliding contact. Tested and approved by leading electrical laboratories. Fits ¾ inch hole. Size ¾ inch.

Each ■ Each
K232M (PB1) D3C1 \$0.48
 Lots of 12 **D2C9**
 Twelve in counter merchandiser. Wt. pkg. ¾ lb.

MECHANICAL DOOR CHIMES

THE AUTH-O-TONE



Suburban

Instead of Knocking, it Chimes
 Sounds Two Distinct Harmonious Chime Tones

Manually operated—no electricity, batteries, transformers or wiring. Combines beauty, quality and simplicity for the home, apartment or hotel. Mount directly on doors from ½ to 2 inches thick. Easily installed.

Polished brass knocker 6 inches high 2 inches wide, with space to engrave owner's name. Ivory enameled chimes 6½ inches long, 3 inches wide, 1½ inches deep. Mounting space required: 8¼ inches high, 3 inches wide.

Less than six..... D3C0%
 Six or more..... D4C0%

Each ▲ Each
L1298M (840) X5D33 \$7.75
LX1298M (840) X4D65—(Case lots 6)
 Six in pkg. Wt. pkg. 12 lbs.

DOOR CHIME
TRANSFORMER

Listed by Underwriters' Laboratories, Inc.

For "Anyplace" Mounting



Greater power. Extra strong. Sturdy construction. Bi-metal safety switch prevents overload damage. No outlet box plate needed, mount on any box (outlet, wiring, fuse or switch) or open wiring position. Can take substantial increases in instantaneous surge loads. Can't burn out.

For 115 Volts 50/60 Cycle A.C.

Wt. Ea.,
 Volts lbs. ■ Each
K247M (101/OB) X2D02 16 ¾ \$3.10
KK247M (101/OB) X1D86—(Case Lots 48)
 Forty-eight in std. pkg.

AUTH ELECTRIC CO.



Sounds two melodious, resonant musical notes by merely pushing button. Entirely mechanical in operation. Requires no electricity, wiring or batteries. Mounts directly on door or door frame. Easily installed.

Handsomely styled polished brass push button escutcheon with durable plastic button and name card holder. Ivory enameled chime, mounts inside. Minimum space required for mounting 7¼ inches high, 3¼ inches wide. Fits doors or frames up to 9 inches thick.

Universal

Less than six..... D3C0%
 Six or more..... D4C0%

Each Each
L1299M (855) X3D47 \$4.95
LX1299M (855) X2D97—(Case lots 6)
 Six in pkg. Wt. pkg. 7¼ lbs.

ELECTRIC DOOR BELLS



SPERTI-FARADAY

Steel Back and Covers

Nickel Plated Steel Gong; Gray Enamelled Wrought Steel Back and Cover; Silver Contact Points; all Parts Held by Screws; double magnet, non adjustable.

6-8 Volt AC

Each		Gong ins.	Pkg., lbs.	Wt. lbs.	Each
L1269M	(PR2½)	D6C3★	2½	6	\$0.90
12 or more		D5C4★			
L1271M	(PR4)	X1D10	4	9	1.60
12 or more		D9C6			

One in a Box; Twelve in a Package

ELECTRIC BUZZERS

SPERTI-FARADAY
One Coil

Steel Back and Covers Size Over All 3½x2½ inches; Gray Enamelled Wrought Steel Box and Cover; Makes a Long Bozzing Sound and is Easily Distinguished from a Bell. Single magnet, non adjustable.

6-8 Volt AC

Each		Each
L1268M	(PRB)	D4C9★
12 or more		D4C2★

One in Box, without Screws

Twelve in pkg. Wt. pkg. 6 lbs.

DOOR BELL BUTTONS



EAGLE

Heavy Type Deep Pearl Push Button Incorporating a Six Leaf Spider that Will Hold Button Firmly; Will not Stick or Jam; Can be Used on Metal Box; Large Heavy Terminal Screws.

¾ Inch Center. ½ Inch Depth of Shank

Each		Each
K243M	(E188)	D2C9
10 in ctn., 100 in std. pkg.		Wt. std. pkg. 2 lbs.

DOOR BELL BUTTONS



EAGLE

Heavy type deep pearl push button incorporating a six leaf spider that will hold button firmly; will not stick or jam; can be used on metal box; large heavy terminal screws. Mounted on a nickel plated plate. Length 1½ inches. Width 1 inch.

Each		Each
K242M	(E173)	D3C2
10 in ctn., 100 in std. pkg.		Wt. pkg. 2½ lbs.

EAGLE
Round

For ringing chimes, bells and other signals. Stamped solid brass. Black plastic button. Fibre back with copper alloy contacts.

Diameter 2¼ inches

Each		Each
K240M	(106)	D1C8★
1 in box, with screws, 25 in ctn.		Wt. ctn. 1¾ lbs.



EAGLE

Made of Brown Bakelite Material; Complete with Screws; For use with Door Bells, etc.

Each		Each
K245M	(9700)	D1C3★
One in ctn.		Wt. ctn. 3 ozs.

BELL WIRE



Assorted Colors

18 gauge thermo plastic insulated copper; runs about 135 feet per pound.

For thermostat controls in connection with heating and air conditioning installation. Low Voltage.

Seven Pound Spools

Per Spool		Per Foot
K1204M	(BW18)	X7D00
Per Case		
KK1204M	(BW18)	X52D00

We Do Not Cut Spools

Can Assort all Types of Wires and Cards to Obtain Quantity Prices

STAR ★ DENOTES BEST SELLER

ANNUNCIATOR BELL WIRE



Assorted Colors

Red, Blue, Green, White, Brown, Black.

For bells, radios, chimes, communication systems and toy electric trains. Low voltage.

Solid copper conductor, thermo-plastic insulation.

Per Coil		Ft. in coil	Coils in ctn.	Wt., lbs.	Per Coil
K1187M	D1C5★	25	100	12	\$0.25
Per Case					
KK1187M	X14D00★	(Case lots 100 coils)			
		(20/65)			
Per Coil					
K1189M	D3C7★	65	100	30	.70
Per Case					
KK1189M	X34D00★	(Case lots 100 coils)			

DOOR BELL
TRANSFORMERS

Listed by Underwriters' Laboratories, Inc.

To be Connected to the Ordinary Alternating Circuit for the Purpose of Stepping Down the Current to a Suitable Voltage for Operating All Classes of Bells, Buzzers, Door Openers, Annunciators and Other Light Signal Work. Their Use Eliminates the Need of Batteries.



EAGLE

Engineered and Made to Meet the Most Exacting Conditions in Use with Electric Door Chimes; Heavier Signal, Also Heat Control Devices as Well as Larger Bells and Relays. Cadmium (Rustproof) Finish.

115 Volt 60 Cycle Primary; 16 Volt Secondary

Each		Each
K924M	(2332)	X1D60
One in ctn., 50 in std. pkg.		Wt. pkg. 50 lbs.



EAGLE

Fitted with Flexible Leads; Highly Efficient and Economical in Operation; Cadmium (Rustproof) Finish.

Primary 115 Volts; Secondary 8-10 Volts; 50-60 Cycle

Each		Each
K922M	(2302)	X1D30★
One in ctn., 50 in std. pkg.		Wt. pkg. 50 lbs.

ELECTRIC DOOR BELLS



SPERTI-FARADAY

Steel Back and Covers

Nickel Plated Steel Gong; Gray Enamelled Wrought Steel Back and Cover; Silver Contact Points; all Parts Held by Screws; double magnet, non adjustable.

6-8 Volt AC

Each		Gong ins.	Pkg. lbs.	Each
L1269M	D6C3★ (PR2½)	2½	6	\$0.90
12 or more	D5C4★			
L1271M	X1D10 (PR4)	4	9	1.60
12 or more	D9C6			

One in a Box: Twelve in a Package

ELECTRIC BUZZERS

SPERTI-FARADAY
Two Coils

Steel Back and Covers
Size Over All 3¼x2½ inches; Gray Enamelled Wrought Steel Box and Cover; Makes a Long Buzzing Sound and is Easily Distinguished from a Bell. Single magnet, non adjustable.

6-8 Volt AC

(PRB)

Each		Each
L1268M	D4C9★	\$0.70
12 or more	D4C2★	

One in Box, without Screws

Twelve in pkg. Wt. pkg. 6 lbs.

DOOR BELL BUTTONS



EAGLE

Heavy Type Deep Pearl Push Button Incorporating a Six Leaf Spider that Will Hold Button Firmly; Will not Stick or Jam; Can be Used on Metal Box; Large Heavy Terminal Screws.

¾ Inch Center. ½ Inch Depth of Shank

(E188)

Each		Each
K243M	D2C9	\$0.45
10 in ctn., 100 in std. pkg.		Wt. std. pkg. 2 lbs.

DOOR BELL BUTTONS



EAGLE

Heavy type deep pearl push button incorporating a six leaf spider that will hold button firmly; will not stick or jam; can be used on metal box; large heavy terminal screws. Mounted on a nickel plated plate. Length 1½ inches. Width 1 inch.

(E173)

Each		Each
K242M	D3C2	\$0.50
10 in ctn., 100 in std. pkg.		Wt. pkg. 2½ lbs.

EAGLE
Round

For ringing chimes, bells and other signals. Stamped solid brass. Black plastic button. Fibre back with copper alloy contacts.

Diameter 2¼ inches

(106)

Each		Each
K240M	D1C8★	\$0.29
1 in box, with screws, 25 in ctn.		Wt. ctn. 1½ lbs.



EAGLE

Made of Brown Bakelite Material; Complete with Screws; For use with Door Bells, etc.

(9700)

Each		Each
K245M	D1C3★	\$0.20
One in ctn.		Wt. ctn. 3 ozs.

BELL WIRE



Assorted Colors

18 gauge twisted thermo plastic insulated copper; runs about 135 feet per pound. Color coded conductors.

For thermostat controls in connection with heating and air conditioning installation. Low Voltage.

Seven Pound Spools
(BW18)

Per Spool		Per Foot
K1204M	X7D00	\$0.02
Per Case		
KK1204M	X52D00—(Case lots 8 spools)	

We Do Not Cut Spools

Can Assort all Types of Wires and Cards to Obtain Quantity Prices

STAR ★ DENOTES BEST SELLER

ANNUNCIATOR BELL WIRE



Assorted Colors

Red, Blue, Green, White, Brown, Black.

For bells, radios, chimes, communication systems and toy electric trains. Low voltage.

Solid copper conductor, thermo-plastic insulation.

Per Coil		Ft. in coil	Coils in ctn.	Wt. lbs. ctn.	Per Coil
K1187M	D1C5★	25	100	12	\$0.25

Per Case		
KK1187M	X14D00★—(Case lots 100 coils)	(20/65)

Per Coil				
K1189M	D3C7★	85	100	30 .70
Per Case				
KK1189M	X34D00★—(Case lots 100 coils)			

DOOR BELL TRANSFORMERS

Listed by Underwriters' Laboratories, Inc.

To be Connected to the Ordinary Alternating Circuit for the Purpose of Stepping Down the Current to a Suitable Voltage for Operating All Classes of Bells, Buzzers, Door Openers, Annunciators and Other Light Signal Work. Their Use Eliminates the Need of Batteries.



EAGLE

Engineered and Made to Meet the Most Exacting Conditions in Use with Electric Door Chimes; Heavier Signal, Also Heat Control Devices as Well as Larger Bells and Relays. Cadmium (Rustproof) Finish.

115 Volt 60 Cycle Primary; 16 Volt Secondary (2332)

Each		Each
K924M	X1D60	\$2.49
One in ctn., 50 in std. pkg.		Wt. pkg. 50 lbs.



EAGLE

Fitted with Flexible Leads; Highly Efficient and Economical in Operation; Cadmium (Rustproof) Finish.

Primary 115 Volts; Secondary 8-10 Volts; 50-60 Cycle (2302)

Each		Each
K922M	X1D30★	\$2.10
One in ctn., 50 in std. pkg.		Wt. pkg. 50 lbs.