

(No Model.)

C. MORRILL.
SAW SET.

No. 441,963.

Patented Dec. 2, 1890.

Fig. 1.

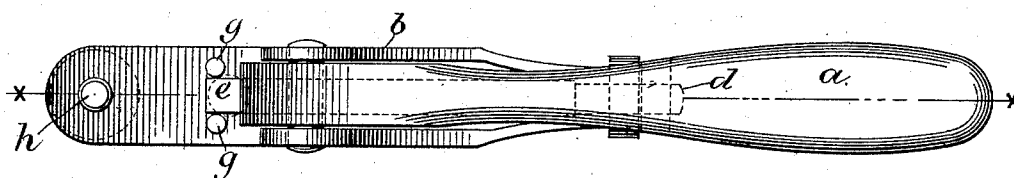


Fig. 4.



Fig. 2.


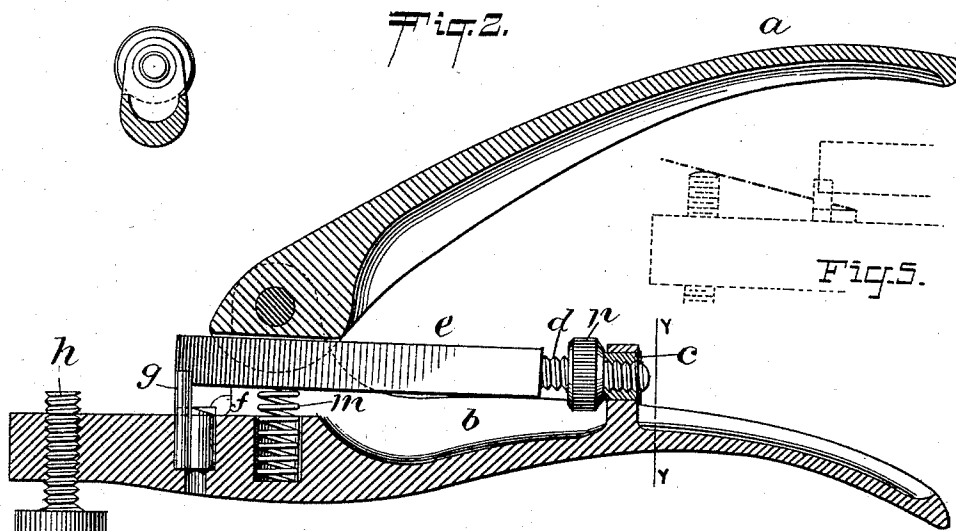


Fig. 5.

Fig. 3.

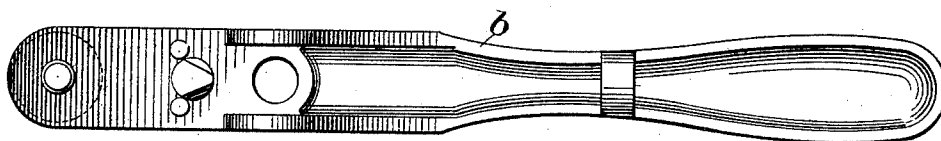

WITNESSES:
Gustave Dietrich
Wm. H. Capel

INVENTOR
Charles Morrill
BY *J. H. Hurd*
ATTORNEY.

UNITED STATES PATENT OFFICE.

CHARLES MORRILL, OF NEW YORK, N. Y.

SAW-SET.

SPECIFICATION forming part of Letters Patent No. 441,963, dated December 2, 1890.

Application filed July 30, 1890. Serial No. 360,418. (No model.)

To all whom it may concern:

Be it known that I, CHARLES MORRILL, a citizen of the United States, and a resident of New York, in the county of New York and State of New York, have invented certain new and useful Improvements in Log-Saw Sets, of which the following is a specification.

My invention relates to improvements in saw-sets having a screw-adjusting hammer, a fixed or adjustable anvil, and a saw-adjusting device, all of which will be fully described hereinafter.

The saw-sets heretofore made for setting the teeth of log-saws were provided with a horizontally-adjustable hammer, and a fixed anvil abutting against a guiding-wall, the latter forming a part of the main body of the device. I find that when setting the teeth of a saw with this device the points thereof would press or rub against the vertical guiding-wall, and thereby dull them, which would necessarily require refiling. I also find that the adjustable guide-plate is somewhat cumbersome and expensive. I propose to simplify the device and provide ample means whereby the teeth will be guided when being set without having their points dulled or otherwise injured. These objections are obviated by my invention, which consists of a punch-handle holder, the latter terminating in a projection, which I will here term the "main body" of the device. Upon the horizontal plane of the device is arranged an anvil, and near thereto are two vertically-fixed guides and a saw-adjusting screw located near to the forward end of the device, all of which work in combination with other mechanical contrivances, thus forming a complete saw-set.

The invention will be more fully set forth and pointed out in the claims hereinafter.

In the accompanying drawings, Figure 1 is a plan view of the device. Fig. 2 is a vertical section taken on the line X X of Fig. 1. Fig. 3 is a detached plan view of the punch-handle holder. Fig. 4 is a transverse section taken on the line Y Y of Fig. 2. Fig. 5 is a diagram of the working parts, showing the manner in which the saw is operated upon.

Similar letters refer to similar parts throughout the drawings, in which—

a represents the punch-handle, and *b* its holder, the main body of the latter having a vertically - projecting lug provided with a screw-threaded sleeve *c*, having the nut *n* integral therewith and adapted to receive the screw-threaded extension *d* of the horizontally-arranged hammer *e*. The main body of the device is mounted with the fixed anvil *f* and vertical guides *g*, as also the saw-adjusting screw *h*, the operation of which will be explained hereinafter.

Modus operandi: The adjusting-screw is screwed up until the desired pitch is obtained, after which the body of the saw is placed upon it so that one of its teeth will pass between the guides *g* and rest upon the plane of the anvil, after which the punch-handle is pressed upon, thereby forcing the hammer down upon the tooth until the plane of the latter shall have touched the plane of the anvil completely. This being done, the punch-handle is released, and the hammer is carried back to its normal position by means of the retracting-spring *m*. The amount of stock of the tooth to be bent over will be regulated by the adjusting-nut *n*, which when turned will move the hammer forward or backward, thus accomplishing the result desired.

Having thus described my invention, what I claim as new, and desire to secure by Letters Patent, is—

1. The combination, with a saw-set having a punch-handle, a horizontal screw-adjusting hammer, a fixed or adjustable anvil, and a saw-adjusting device, of the fixed vertical guides, substantially as shown and described.

2. The combination, with a saw-set having a punch-handle, a horizontal screw-adjusting hammer, a fixed or adjustable anvil, and the vertically-fixed guides, of the saw-adjusting device composed of a single screw, substantially as shown and described.

Signed at New York, in the county of New York and State of New York.

CHAS. MORRILL.

Witnesses:

L. T. EARLL,
ALFRED R. TORRES.